

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APV
	B3	PART STATUS CHANGE TO DISCONTINUNACE	21JUL2026	NS	PS

NOTES:

MATERIAL:

TERMINAL BLOCK: POLYAMIDE 66, UL94V-0, BLACK.

TERMINAL: BRASS, TIN PLATED.

SCREW: M3 STEEL, NICKEL PLATED W/ WIRE CLAMP.

ELECTRICAL:

CURRENT RATING: 10A, 300V

INSULATION WITHSTANDS: 2000V, MIN

INSULATION RESISTANCE: >2000MEGA OHM, 500V

MECHANICAL:

WIRE RANGE: 16–30AWG





RFCOMMENDED TORQUE: 10 IN-LB

OPERATION TEMP: -40°C TO 105°C


UL RECOGNIZED PER US & CANADIAN STANDARDS.

NOTE DELETED

OBSOLETE

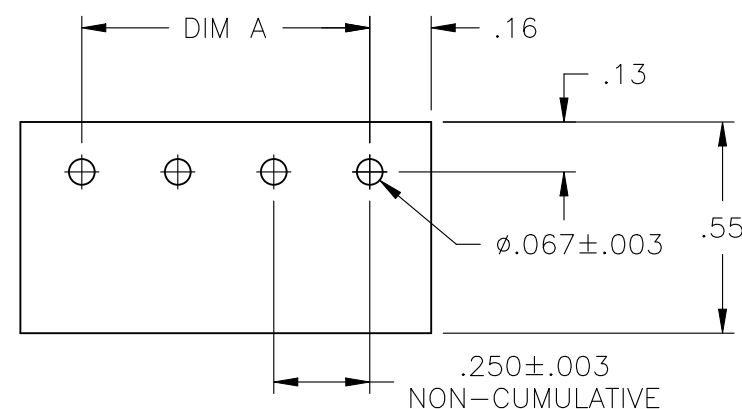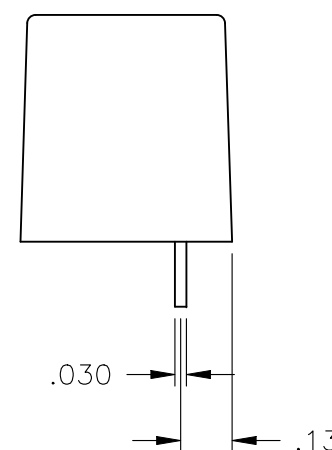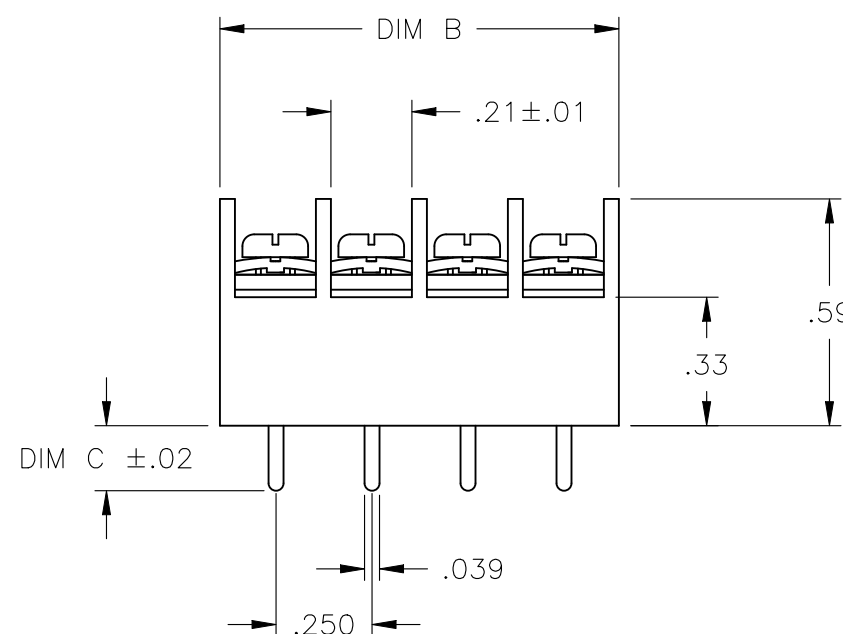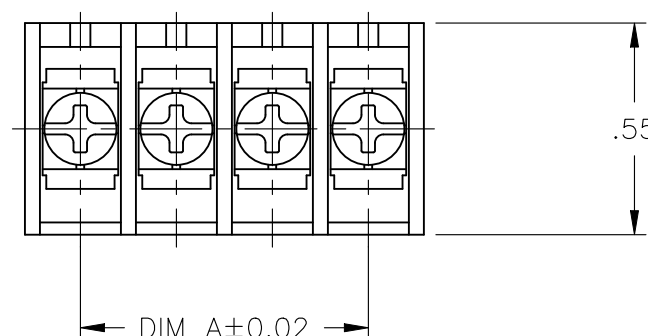

RECOMMENDED PCB LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHLEGEL 30MAY03		TE Connectivity			
		CHK S YODER 5/30/03					
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME			
		APVD S YODER 5/30/03		TERMINAL BLOCK, .250 PITCH, DUAL BARRIER PCV STYLE —			
		PRODUCT SPEC —					
		APPLICATION SPEC —					
		WEIGHT 0.000000		SIZE A3	CAGE CODE 00779	DRAWING NO C-1546657	
MATERIAL —		FINISH —		CUSTOMER DRAWING			
				SCALE 2:1	SHEET 1 OF 1		REV B.3