
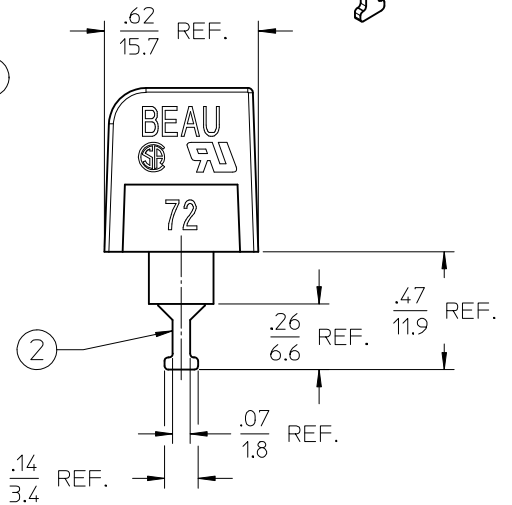
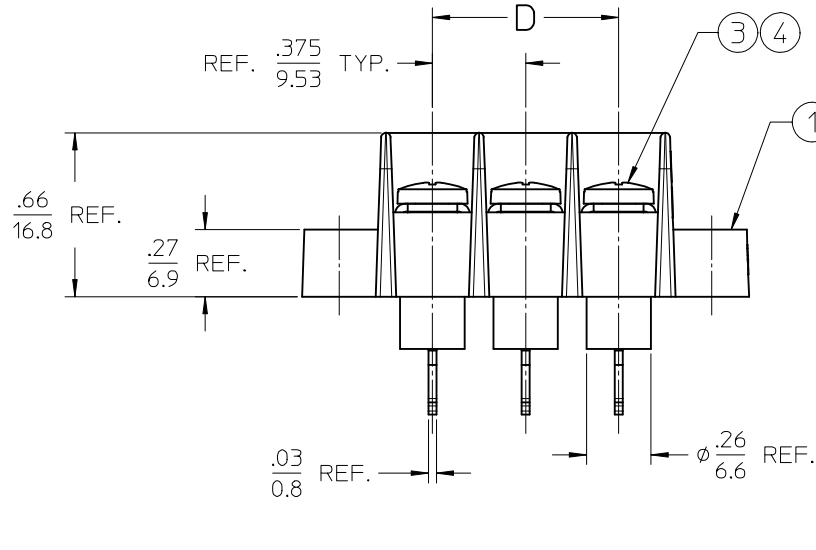
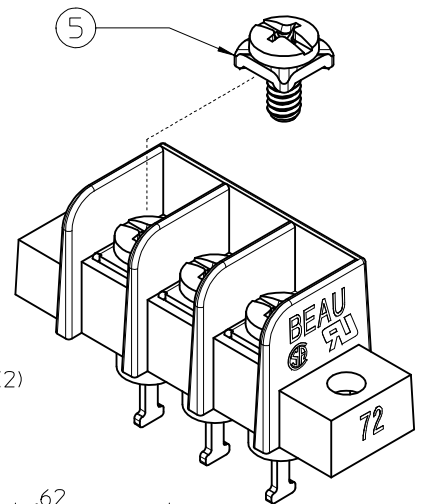


	10		9		8		7			6	5	4	3	2	38724
	NO. OF CIRCUITS	DIM. "A" IN mm	DIM. "B" IN mm	DIM. "C" IN mm	DIM. "D" IN mm	ASSEMBLY MATERIAL NO. (STANDARD)	ASSEMBLY MATERIAL NO. (-49 OPT)	ASSEMBLY MATERIAL NO. (-50 OPT)							
F	02	1.43	36.3	1.125	28.58	0.83	21.1	.375	9.53						387242402
	03	1.80	45.7	1.500	38.10	1.21	30.7	.750	19.05						387242403
	04	2.18	55.4	1.875	47.63	1.58	40.2	1.125	28.58						387291306
	05	2.55	64.8	2.250	57.15	1.96	49.7	1.500	38.10	387242005					
	06	2.93	74.4	2.625	66.68	2.33	59.2	1.875	47.63	387242006					
	07	3.30	83.8	3.000	76.20	2.71	68.8	2.250	57.15						
	08	3.68	93.5	3.375	85.73	3.08	78.3	2.625	66.68	387242008					387242408
	09	4.05	102.9	3.750	95.25	3.46	87.8	3.000	76.20	387242009					
	10	4.43	112.5	4.125	104.78	3.83	97.3	3.375	85.73	387242010					
E	11	4.80	121.9	4.500	114.30	4.21	106.9	3.750	95.25	387242011					
	12	5.18	131.6	4.875	123.83	4.58	116.4	4.125	104.78						
	13	5.55	141.0	5.250	133.35	4.96	125.9	4.500	114.30						

NOTES:

1. MATERIAL: SEE TABLE
2. FINISH: SEE TABLE
3. "XX" REFERS TO QUANTITY OF CIRCUITS
4. PRODUCT SPEC: PS-38710-001
5. PART IS TO BE RoHS COMPLIANT

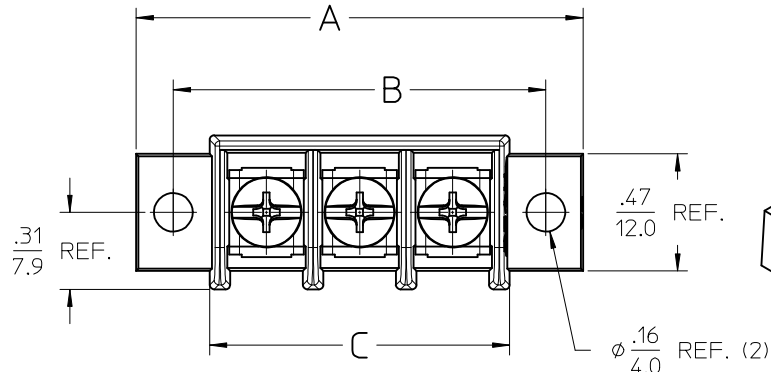

					RELEASED EC NO: IFG2015-0980 DRAWN: RSTONE CHKD: B RUPERT APPR: JFMURPHY	2014/11/21 2014/11/25 2015/04/22	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 2:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION 			
				mm					INCH		DRAWN BY RSTONE		DATE 2014/11/21		TITLE SINGLE ROW BARRIER TERMINAL STRIP ASSY .375 PITCH STYLE 2			
4 PLACES		± --- ± ---		CHECKED BY B RUPERT					DATE 2014/11/25									
3 PLACES		± --- ± ---		APPROVED BY JFMURPHY					DATE 2015/04/22									
2 PLACES		± --- ± .01		MATERIAL NO.					DOCUMENT NO.		SHEET NO.							
1 PLACE		± 0.3 ± ---		SEE CHART					SD-38724-004		1 OF 1							
0 PLACE		± --- ± ---		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS					SIZE B		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							
ANGULAR ± 2 °																		

5	XX	SCRW&WSHR, #6-32X.25, PAN,PH-SL,(-50 OPT)	STEEL	ZN, CLEAR CHROMATE
4	XX	SCREW, #6-32X.250, BHD PH/SL (-49 OPT)	BRASS	NICKEL PLATE
3	XX	SCREW, #6-32X.250, BHD PH/SL (STANDARD)	STEEL	ZN, CLEAR CHROMATE
2	XX	TERMINAL, WW, #6-32	BRASS	TIN PLATE
1	1	INSULATOR, CS INSL.	POLYESTER (PBT)	BLACK
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH