

4

3

2

1

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	P2	PART STATUS CHANGE TO DISCONTINUNACE	30JUN2026	NS	PS

1. MATERIAL:
HOUSING: POLYAMIDE 6 UL94V-2.
COLOR: NATURAL(OFF WHITE).
TUBULAR CONTACT: BRASS, TIN PLATED.
SCREW: M3.5, STEEL, ZINC W/ NON-HEXAVALENT CHROMATE (CHROME III).
WIRE PROTECTOR: STAINLESS STEEL.



2. ELECTRICAL:
CURRENT RATING: 40A, 250V.
WIRE RANGE: 10-22 AWG.

3. CONTINUOUS WORKING TEMPERATURE 100°C.

4. CUTTING PROJECTION CAN BE ON BOTH SIDES
DEPENDING ON CUTTING LOCATION

5. CUTTING BURR MAX. 1mm ALLOWED.

OBSOLETE	120.0	139.5	12	TSB100012DS	1-1776302-2
	108.0	127.5	11	TSB100011DS	1-1776302-1
	96.0	115.5	10	TSB100010DS	1-1776302-0
	84.0	103.5	9	TSB100009DS	1776302-9
	72.0	91.5	8	TSB100008DS	1776302-8
	60.0	79.5	7	TSB100007DS	1776302-7
	48.0	67.5	6	TSB100006DS	1776302-6
	36.0	55.5	5	TSB100005DS	1776302-5
	24.0	43.5	4	TSB100004DS	1776302-4
	12.0	31.5	3	TSB100003DS	1776302-3
	-	19.5	2	TSB100002DS	1776302-2
	-	7.5	1	TSB100001DS	1776302-1
	DIM B	DIM A	POSN	T & B PART NUMBER	TE PART NUMBER

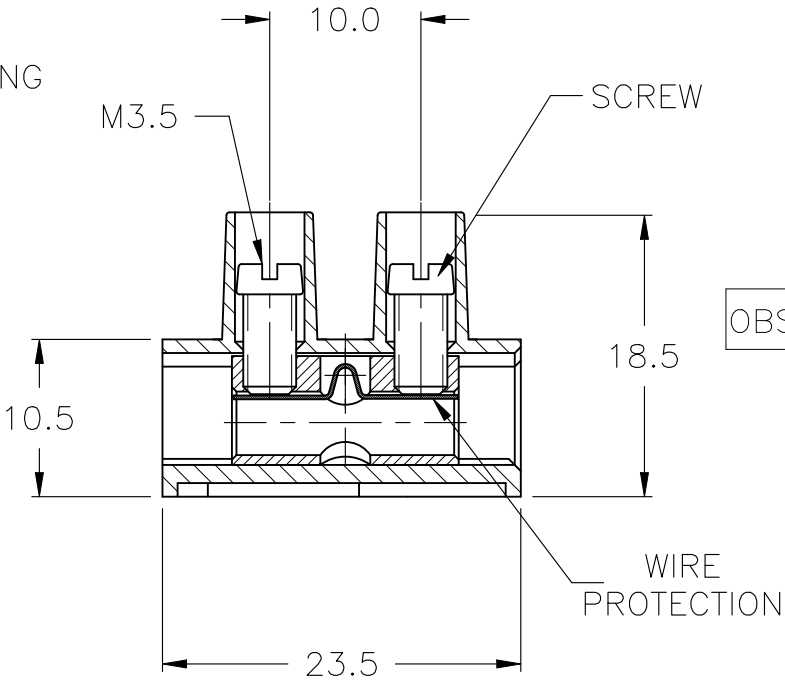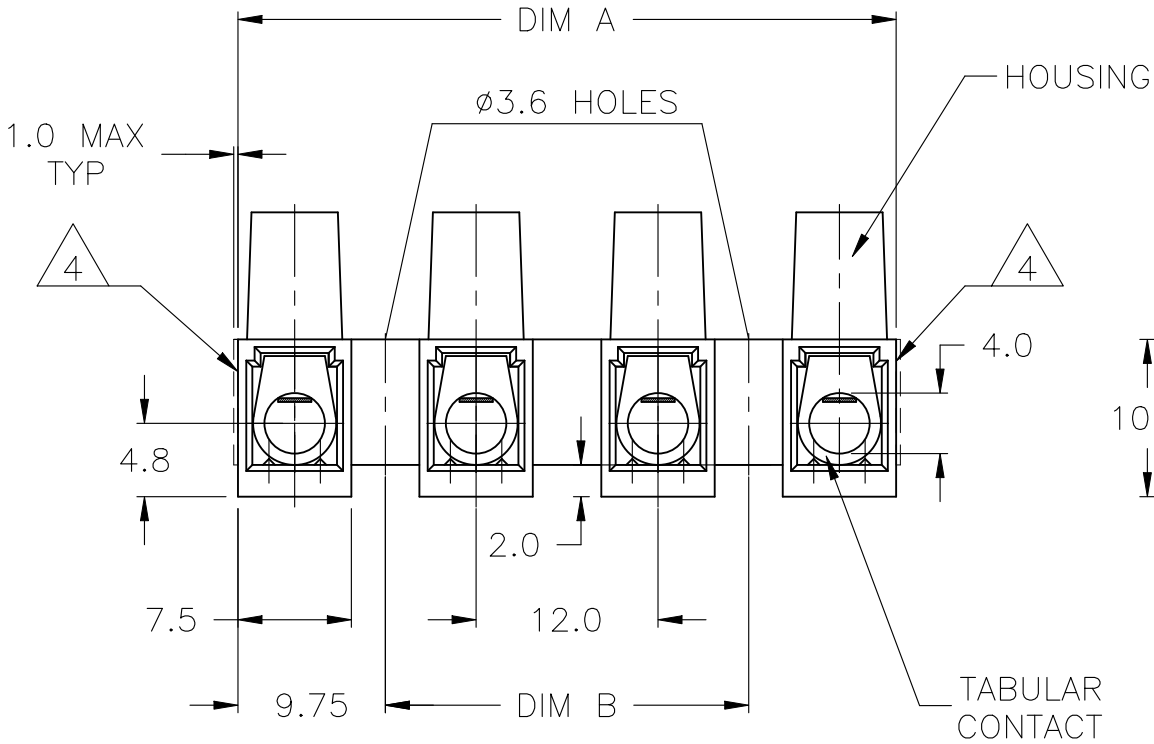

1776302-4 AS SHOWN

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHLEGEL 3/21/05	TE Connectivity		
DIMENSIONS: mm		CHK C RICHARD 3/21/05			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD C RICHARD 3/21/05	NAME 12.0 PITCH, W/ WIRE PROTECTOR		
		PRODUCT SPEC	-		
0 PLC ± - 1 PLC ± 0.3 2 PLC ± 0.25 3 PLC ± - 4 PLC ± - ANGLES ± 2°		APPLICATION SPEC	-		
MATERIAL SEE NOTES		WEIGHT -	SIZE A3	CAGE CODE 00779	DRAWING NO C-1776302
FINISH SEE NOTES		RESTRICTED TO -			
CUSTOMER DRAWING			SCALE NTS	SHEET 1 OF 1	REV P2