
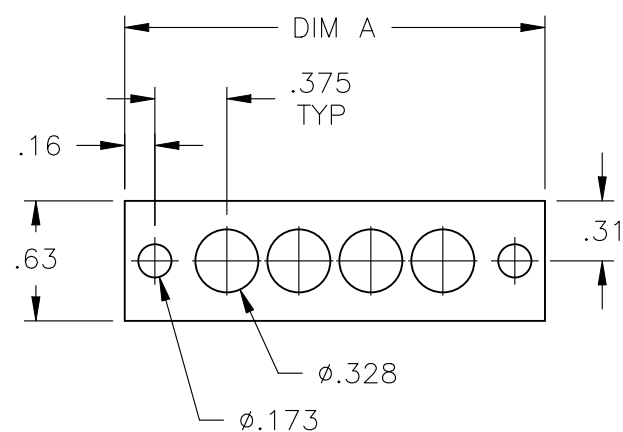
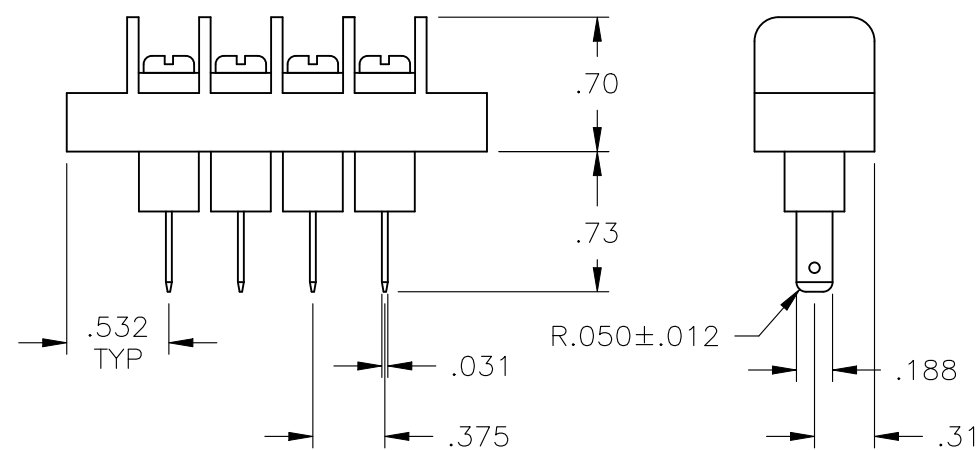


REVISIONS


MATERIAL:
HOUSING: THERMOPLASTIC, UL94V-0, BLACK.
TERMINALS: BRIGHT TIN OVER COPPER ALLOY.
SCREWS: 6-32, STEEL, ZINC CHROMATE FINISH.

ELECTRICAL:
CURRENT RATING: 20A
OPERATING VOLTAGE: 300V
WIRE RANGE: 12-22 AWG

MECHANICAL:
PITCH: .375
OPERATING TEMP.: +105°C MAX.

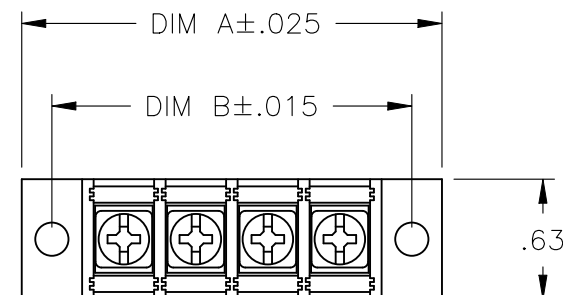

OBSOLETE	9.375	9.689	24	JC6-F307-24	2-1776956-4
OBSOLETE	9.000	9.314	23	JC6-F307-23	2-1776956-3
OBSOLETE	8.625	8.939	22	JC6-F307-22	2-1776956-2
OBSOLETE	8.250	8.564	21	JC6-F307-21	2-1776956-1
OBSOLETE	7.875	8.189	20	JC6-F307-20	2-1776956-0
OBSOLETE	7.500	7.814	19	JC6-F307-19	1-1776956-9
OBSOLETE	7.125	7.439	18	JC6-F307-18	1-1776956-8
OBSOLETE	6.750	7.064	17	JC6-F307-17	1-1776956-7
OBSOLETE	6.375	6.689	16	JC6-F307-16	1-1776956-6
OBSOLETE	6.000	6.314	15	JC6-F307-15	1-1776956-5
OBSOLETE	5.625	5.939	14	JC6-F307-14	1-1776956-4
OBSOLETE	5.250	5.564	13	JC6-F307-13	1-1776956-3
	4.875	5.189	12	JC6-F307-12	1-1776956-2
OBSOLETE	4.500	4.814	11	JC6-F307-11	1-1776956-1
OBSOLETE	4.125	4.439	10	JC6-F307-10	1-1776956-0
OBSOLETE	3.750	4.064	9	JC6-F307-09	1776956-9
	3.375	3.689	8	JC6-F307-08	1776956-8
OBSOLETE	3.000	3.314	7	JC6-F307-07	1776956-7
OBSOLETE	2.625	2.939	6	JC6-F307-06	1776956-6
	2.250	2.564	5	JC6-F307-05	1776956-5
OBSOLETE	1.875	2.189	4	JC6-F307-04	1776956-4
OBSOLETE	1.500	1.814	3	JC6-F307-03	1776956-3
	1.125	1.439	2	JC6-F307-02	1776956-2
	DIM B	DIM A	NO OF POS	CATALOG NUMBER	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHLEGEL11/16/06		TE Connectivity			
DIMENSIONS: INCHES		CHK S YODER11/16/06					
		APVD S YODER11/16/06		NAME JC6-F307-XX ASSEMBLY			
		PRODUCT SPEC —					
		APPLICATION SPEC —					
		WEIGHT0.000000		SIZEA3	CAGE CODE00779	DRAWING NOC-1776956	RESTRICTED TO —
MATERIAL—		FINISH—		CUSTOMER DRAWING			
				SCALE1:1	SHEET1 OF 1	REVB3	