


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	P1	PART STATUS CHANGE TO DISCONTINUNACE	26JUN2026	NS	PS

1. MATERIAL:
HOUSING: POLYAMIDE 6, UL94V-2.
COLOR: NATURAL (OFF WHITE)
TUBULAR CONTACT: BRASS TIN, PLATED.
SCREWS: M3, STEEL, ZINC PLATED W/ NON-
HEXAVALENT CHROMATE (CHROME III).
WIRE PROTECTOR: STAINLESS STEEL.
2. ELECTRICAL:
CURRENT RATING: 30A.
OPERATING VOLTAGE: 250V.
WIRE RANGE: 16-26 AWG.
3. CONTINUOUS OPERATING TEMP.: 100°C MAX.
- 4 CUTTING PROJECTION CAN BE ON BOTH SIDES
DEPENDING ON CUTTING LOCATION.
5. CUTTING BURR MAX. 1mm ALLOWED.

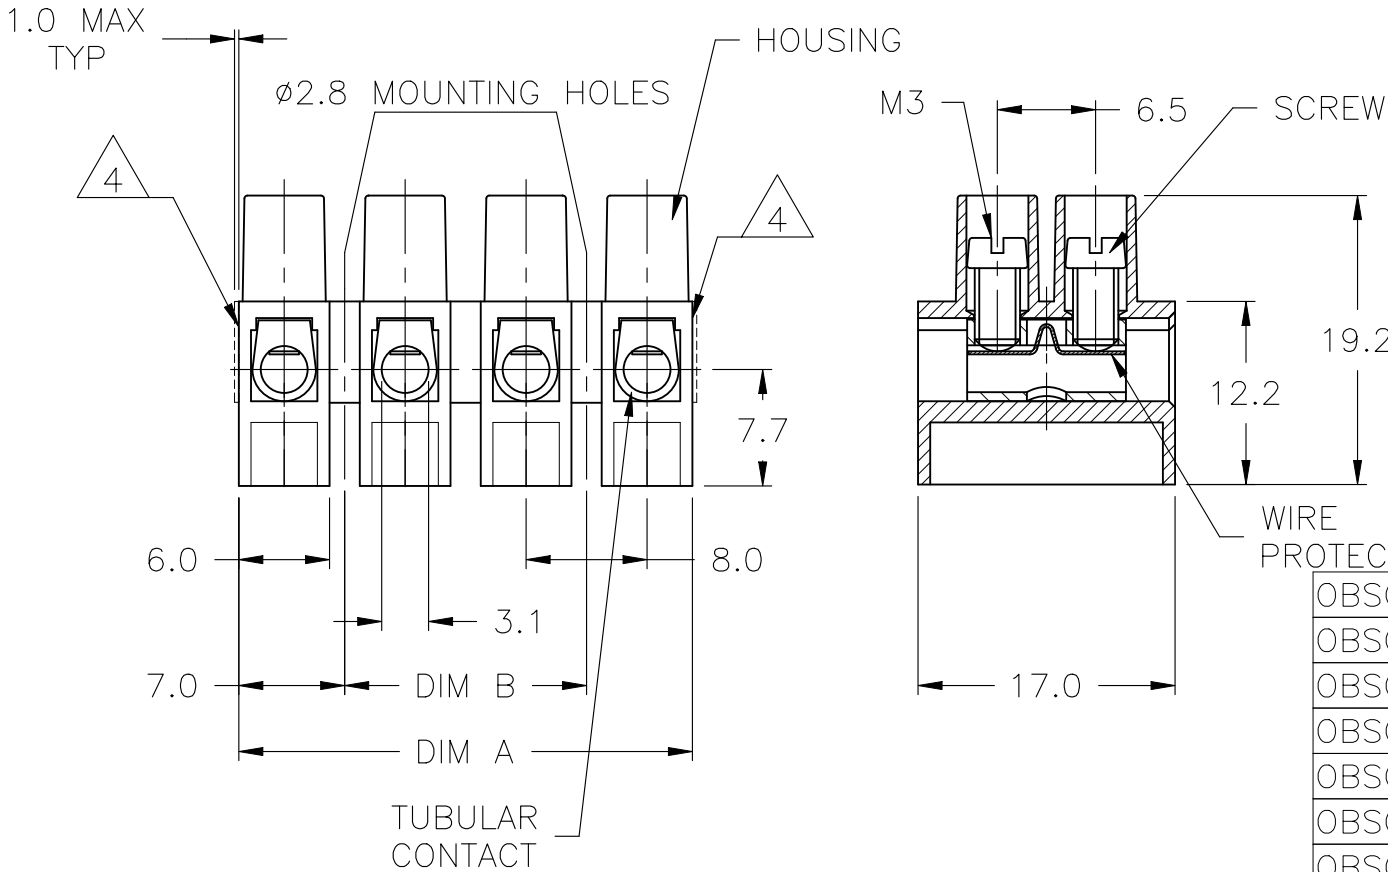

1776322-4 AS SHOWN

	80.0	94.0	12	TSB23012DSDM	1-1776322-2
OBSOLETE	72.0	86.0	11	TSB23011DSDM	1-1776322-1
OBSOLETE	64.0	78.0	10	TSB23010DSDM	1-1776322-0
OBSOLETE	56.0	70.0	9	TSB23009DSDM	1776322-9
OBSOLETE	48.0	62.0	8	TSB23008DSDM	1776322-8
OBSOLETE	40.0	54.0	7	TSB23007DSDM	1776322-7
OBSOLETE	32.0	46.0	6	TSB23006DSDM	1776322-6
OBSOLETE	24.0	38.0	5	TSB23005DSDM	1776322-5
OBSOLETE	16.0	30.0	4	TSB23004DSDM	1776322-4
OBSOLETE	8.0	22.0	3	TSB23003DSDM	1776322-3
OBSOLETE	-	14.0	2	TSB23002DSDM	1776322-2
	-	6.0	1	TSB23001DSDM	1776322-1
	DIM B	DIM A	NO. OF POS.	CATALOG NUMBER	TE PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

MATERIAL
SEE NOTES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± 0.3
2 PLC ± 0.25
3 PLC ± -
4 PLC ± -
ANGLES ± 2°
FINISH

SEE NOTES

DWN S SCHLEGEL 3/21/05
CHK C RICHARD 3/21/05
APVD C RICHARD 3/21/05
PRODUCT SPEC
APPLICATION SPEC
WEIGHT -

TE Connectivity
NAME
8mm PITCH, TERMINAL BLOCK - HIGH CURRENT
W/ WIRE PROTECTOR
SIZE A3 CAGE CODE 00779 DRAWING NO C-1776322 RESTRICTED TO -

CUSTOMER DRAWINGSCALE NTS SHEET 1 OF 1 REV P1