


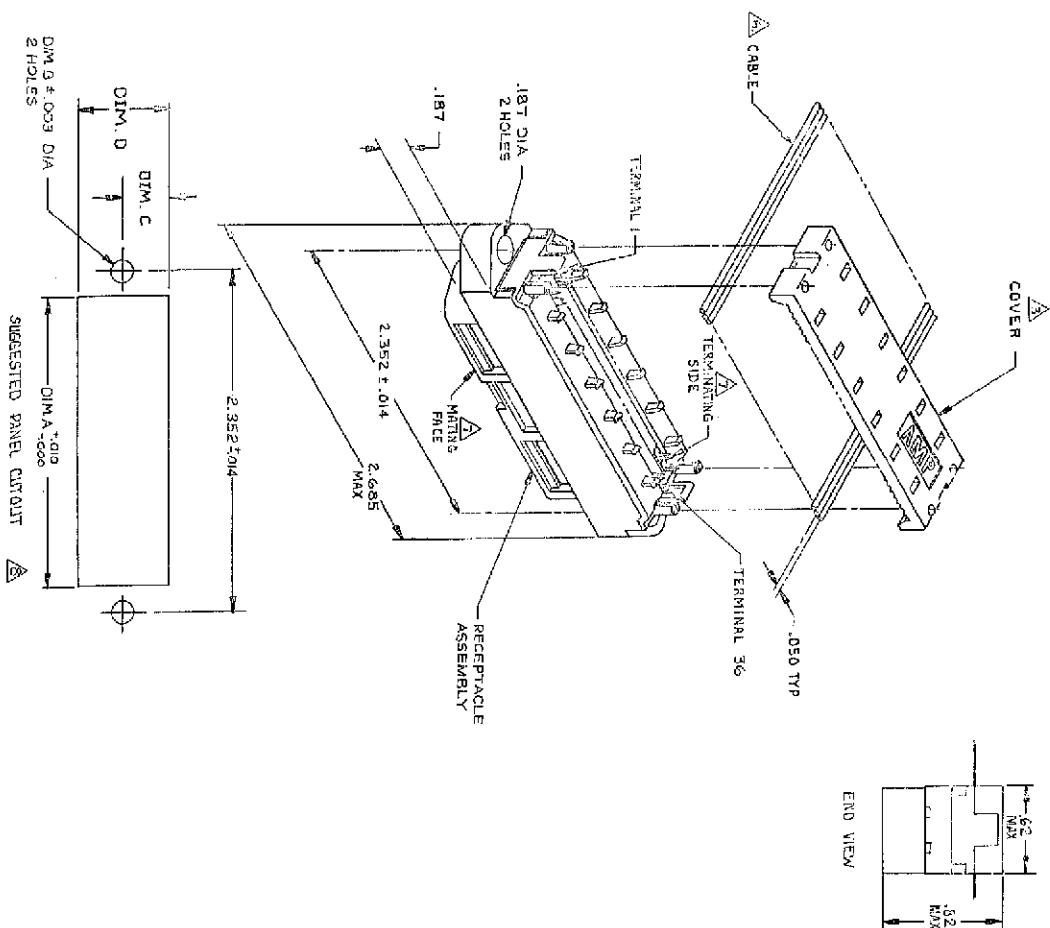

1. THE CONTACT SURFACES OF THE TERMINALS ARE COATED WITH LUBRICANT.
- △ MATERIAL:
HOUSING & COVER - THERMOPLASTIC, BLACK
TERMINALS - PHOS BRONZE PLATED WITH ETHER
0.00030 MINIMUM GOLD PLATE OR GOLD FLASH
OVER PALLADIUM NICKEL PLATE, 0.00030 MIN
TOTAL ON MATING SURFACE. GOLD FLASH PLATED
ON TERMINATING SIDE, 0.00030 MINIMUM NICKEL
UNDERPLATE OVER ENTIRE TERMINAL.
- △ COVER SHOWN LOOSE BUT SHIPPED ASSEMBLED.
4. WIRE RANGE: 26 AWG SOLID THRU 30 AWG SOLID
AND 28 AWG STRANDED RIBBON CABLE.
- △ ALL DIMENSIONS SHOWN ARE FOR REFERENCE
ONLY UNLESS OTHERWISE SPECIFIED.
- △ FLAT CABLE SHALL BE FURNISHED BY CUSTOMER.
- △ MATING FACE CONSISTS OF TWO ROWS OF
TERMINALS ON .085 CENTERS, TERMINATING SIDE
CONSISTS OF TERMINALS ON .100 CENTERS FOR
AN EFFECTIVE .050 TERMINATION.
- △ PANEL THICKNESS RANGE:
FRONT PANEL MOUNTING - .125 MAX
REAR PANEL MOUNTING - .062 MAX
9. FOR MORE INFORMATION REFER TO AMP PRODUCT
SPECIFICATION 108-8078 & APPLICATION SPEC
114-8030.

	DIM D	DIM C	DIM B	DIM A	DESCRIPTION
.620	.310	.149	2.085		REAR PANEL MOUNTING
.840	.320	.126	2.000		FRONT PANEL MOUNTING

[illegible]