
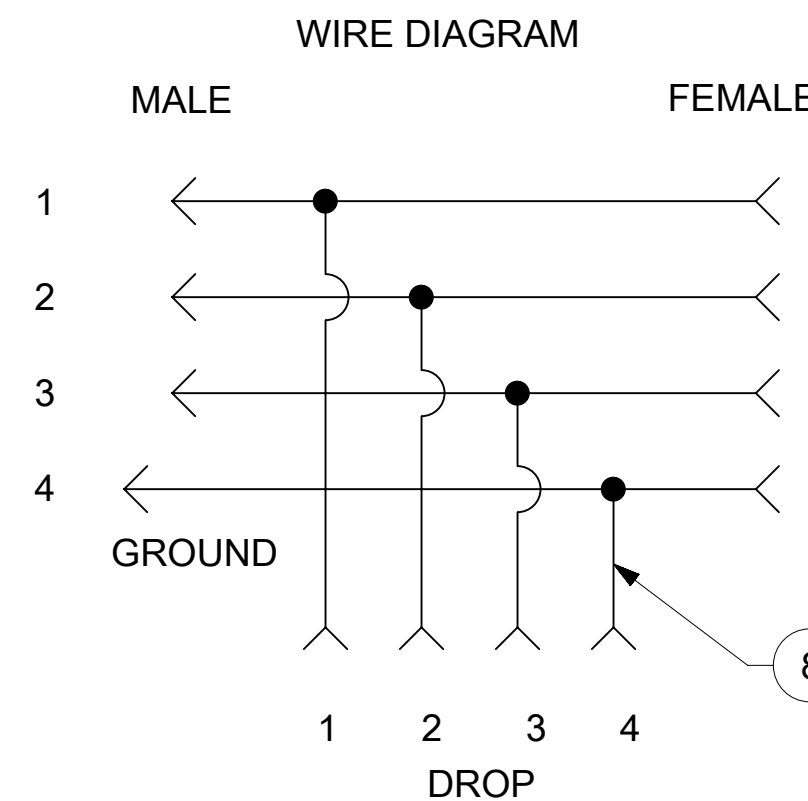
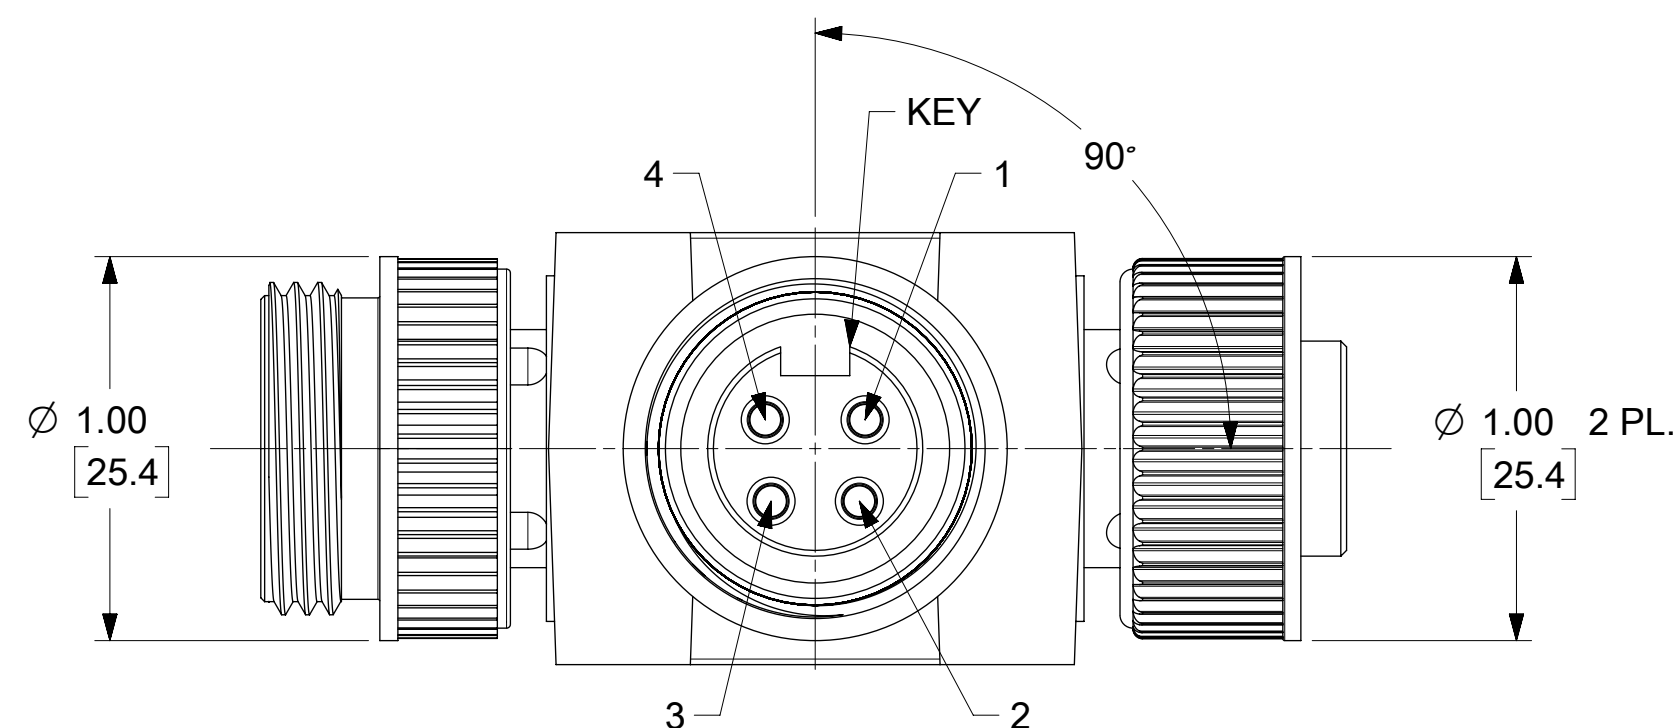


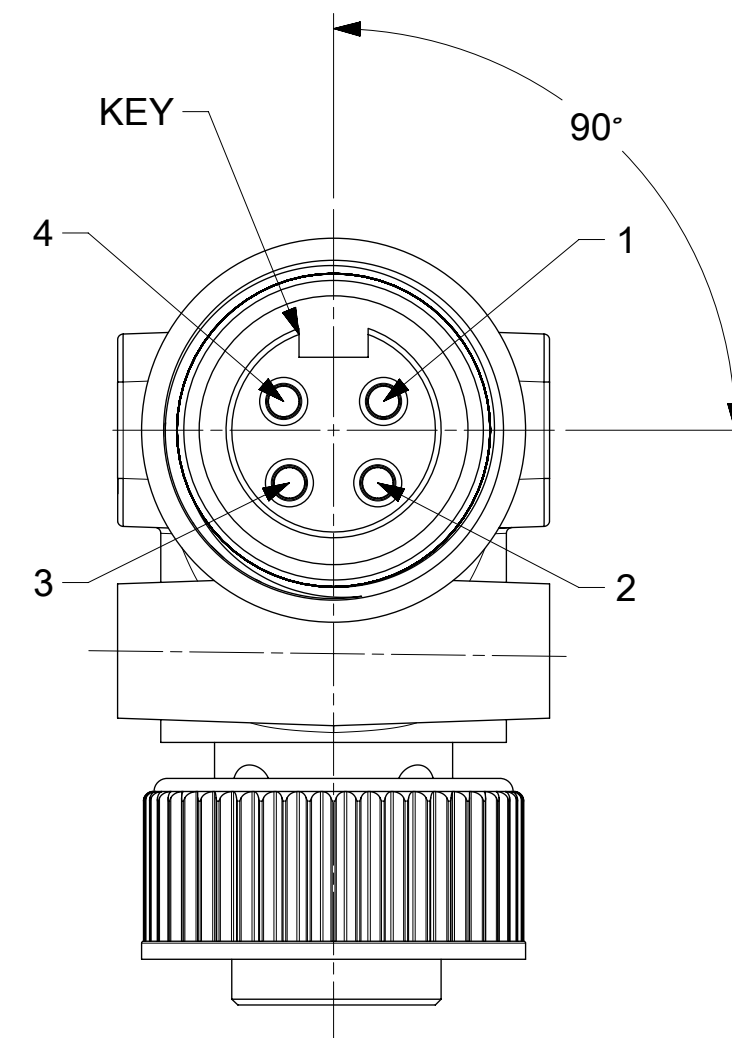

A

NOTES:

1. MATERIAL: AS NOTED
2. FINISH: AS NOTED
3. ELECTRICAL:
VOLTAGE: 483V PER IEC60664
600V PER UL2238
CURRENT: 10A
4. TEMP RATING: -20°C TO +80°C
5. PROTECTION: IP67 (WHEN MATED)
6. COUPLING THREADS: 7/8-16UN
7. UL LISTED FILE: E152210
8. ALL DIMS ARE FOR REFERENCE UNLESS TOLERANCED OR NOTED OTHERWISE

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION														
DIMENSION UNITS		SCALE		CURRENT REV DESC: REMOVED OBSOLETE PART NUMBER AS PER PCN #516685		molex								
INCH		2:1												
GENERAL TOLERANCES (UNLESS SPECIFIED)				MINI-CHANGE TEE 4 POLE MALE/FEM TRUNK, 4 POLE FEMALE DROP SINGLE KEY										
	MM	INCH	EC NO: 830094		PRODUCT CUSTOMER DRAWING									
4 PLACES	±	±	DRWN: PRANAA 2025/07/30											
3 PLACES	±	±	CHK'D: GB 2025/08/08											
2 PLACES	±	±	APPR: GB 2025/08/08		DOCUMENT NUMBER 1300350085									
1 PLACE	±	±	INITIAL REVISION:						DOC TYPE PSD		DOC PART 000		REVISION A1	
0 PLACES	±	±	DRWN: DRWN BY 0099/99/99											
ANGULAR TOL			±	°	APPR: APPR BY 0099/99/99									
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			THIRD ANGLE PROJECTION		DRAWING C-SIZE		SERIES 130035		MATERIAL NUMBER SEE TABLE		CUSTOMER		SHEET NUMBER 1 OF 1	
														