

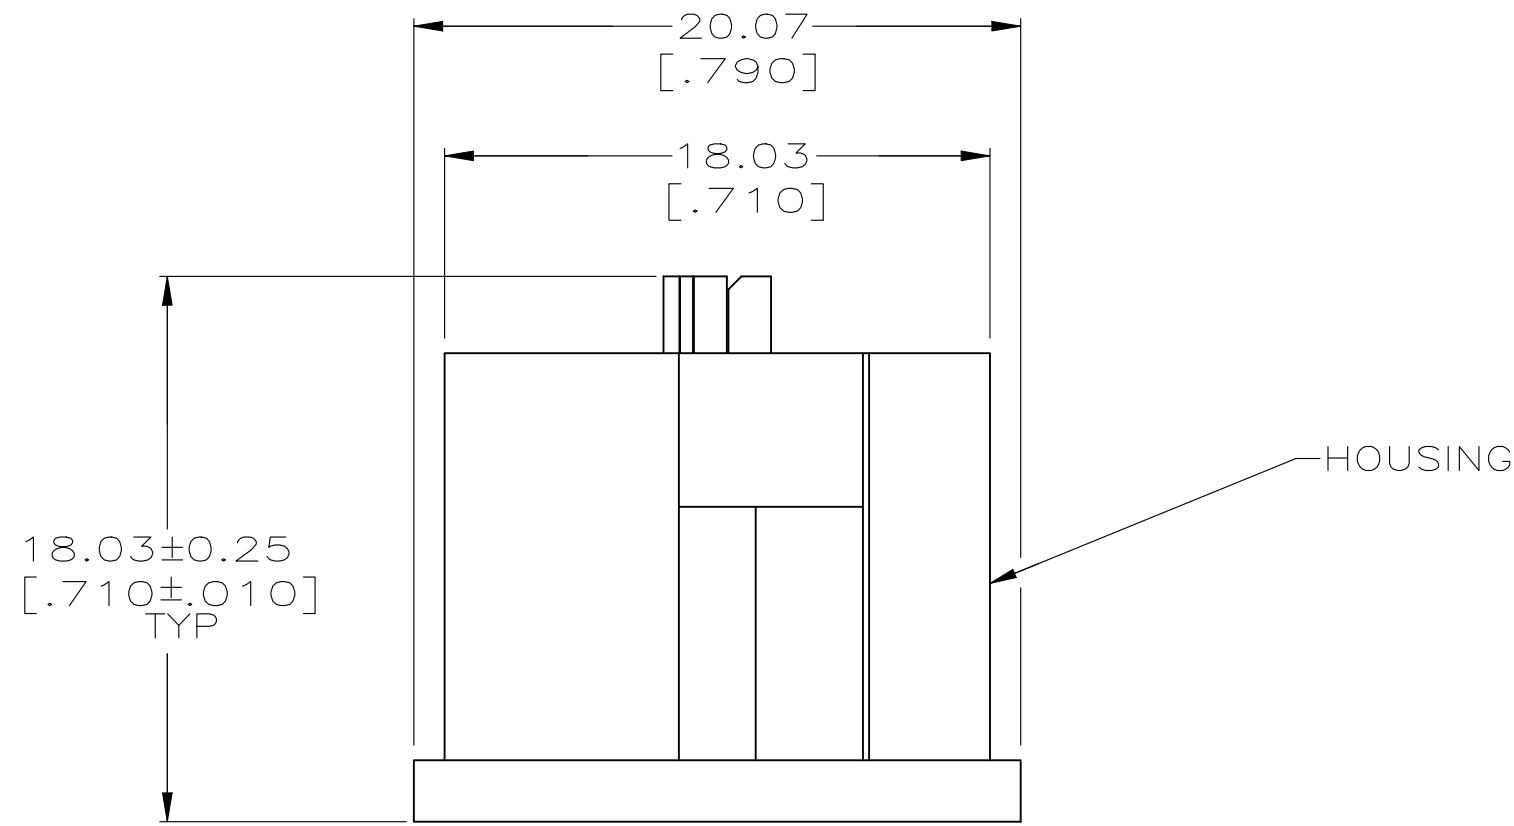


REVISIONS					
P	LTR	DESCRIPTION		DATE	OWN
	H3	REVISED AS PER ECR-24-227720		27NOV2024	MS

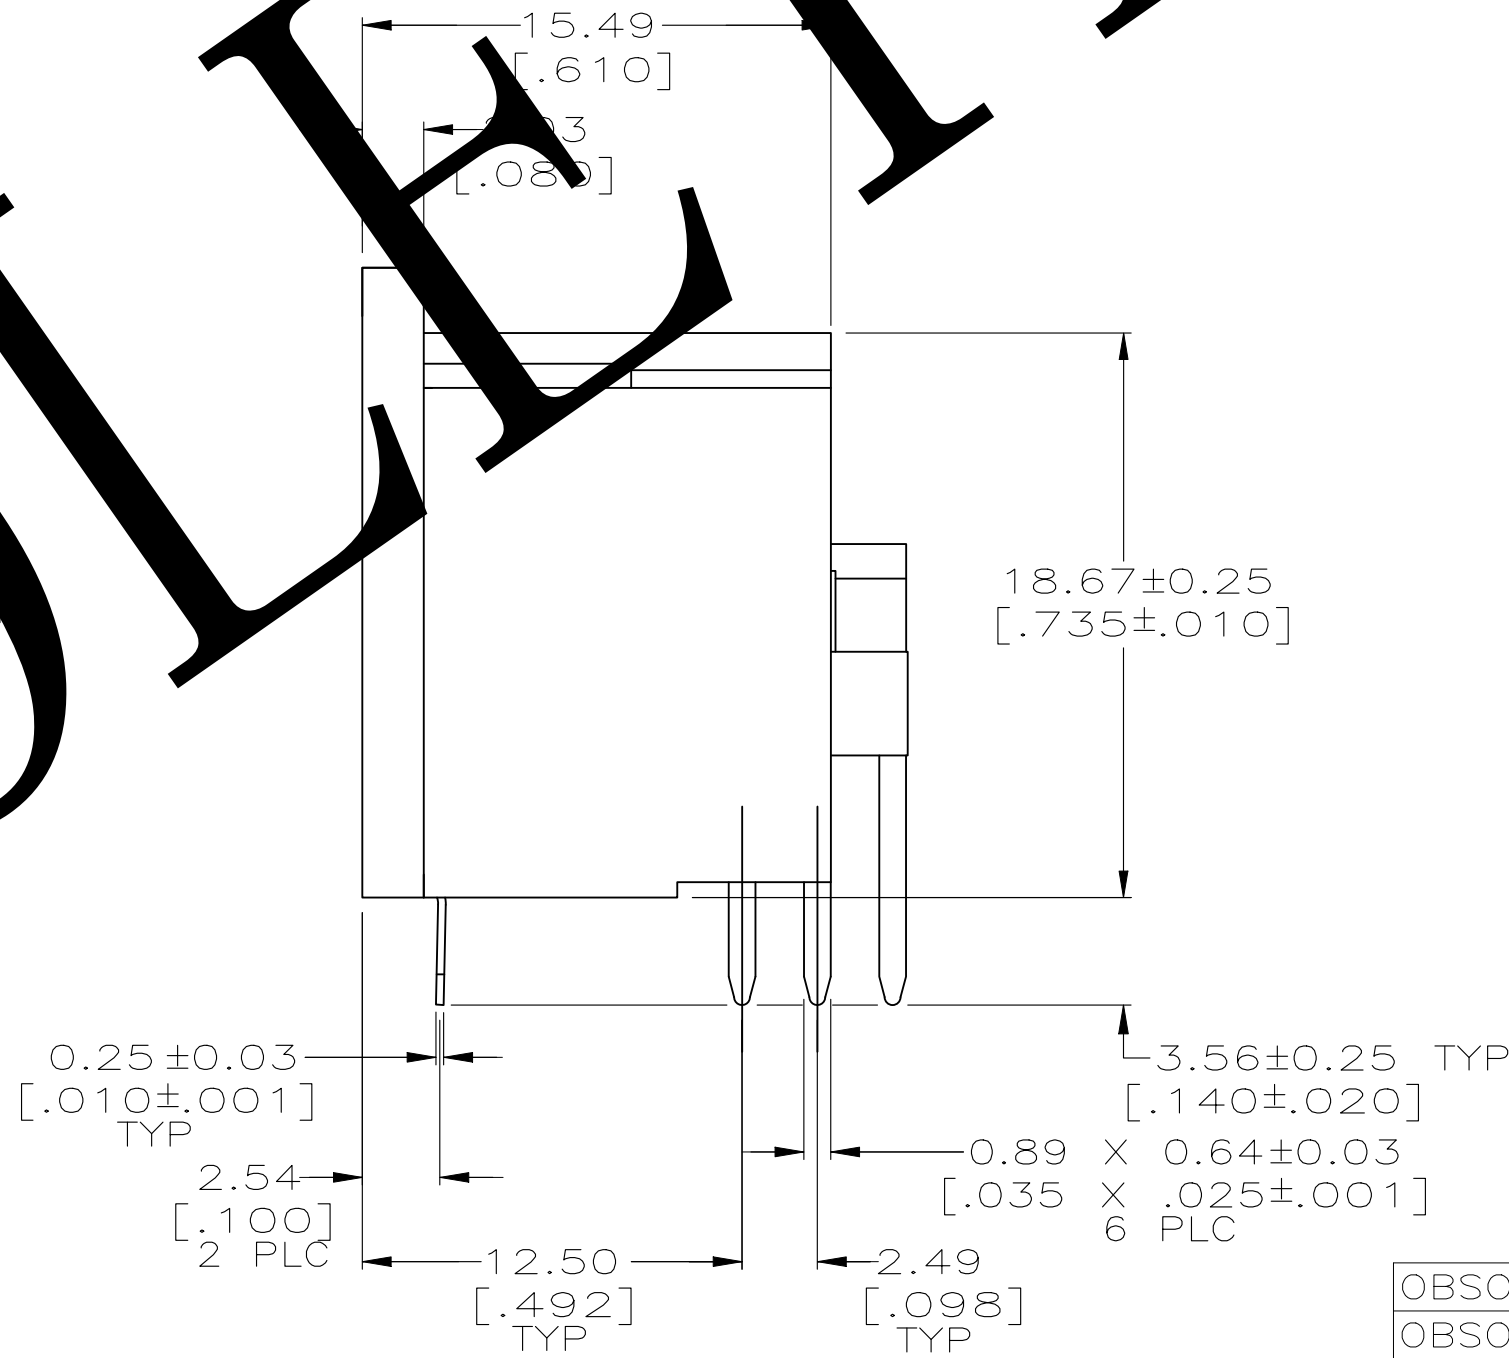

- 1 NYLON, UL 94V-0 RATED, BLACK.
- 2 2.54µm [.000100] MIN TIN-LEAD OVER 1.27µm [.000050] MIN NICKEL.
- 3 TIN PLATING PER MIL-T-10727, NICKEL PLATING PER QQ-N-290.
- 4 ACCEPTS #2 SELF-TAPPING SCREW, .250 LONG REF.
- 5. MATES WITH 6 POSITION SHIELDED DIN PLUG 212437-4.
- 6 BRASS PER ASTM B36.
- 7 2.54µm [.000100] MIN TIN OVER 1.27µm [.000050] MIN NICKEL.

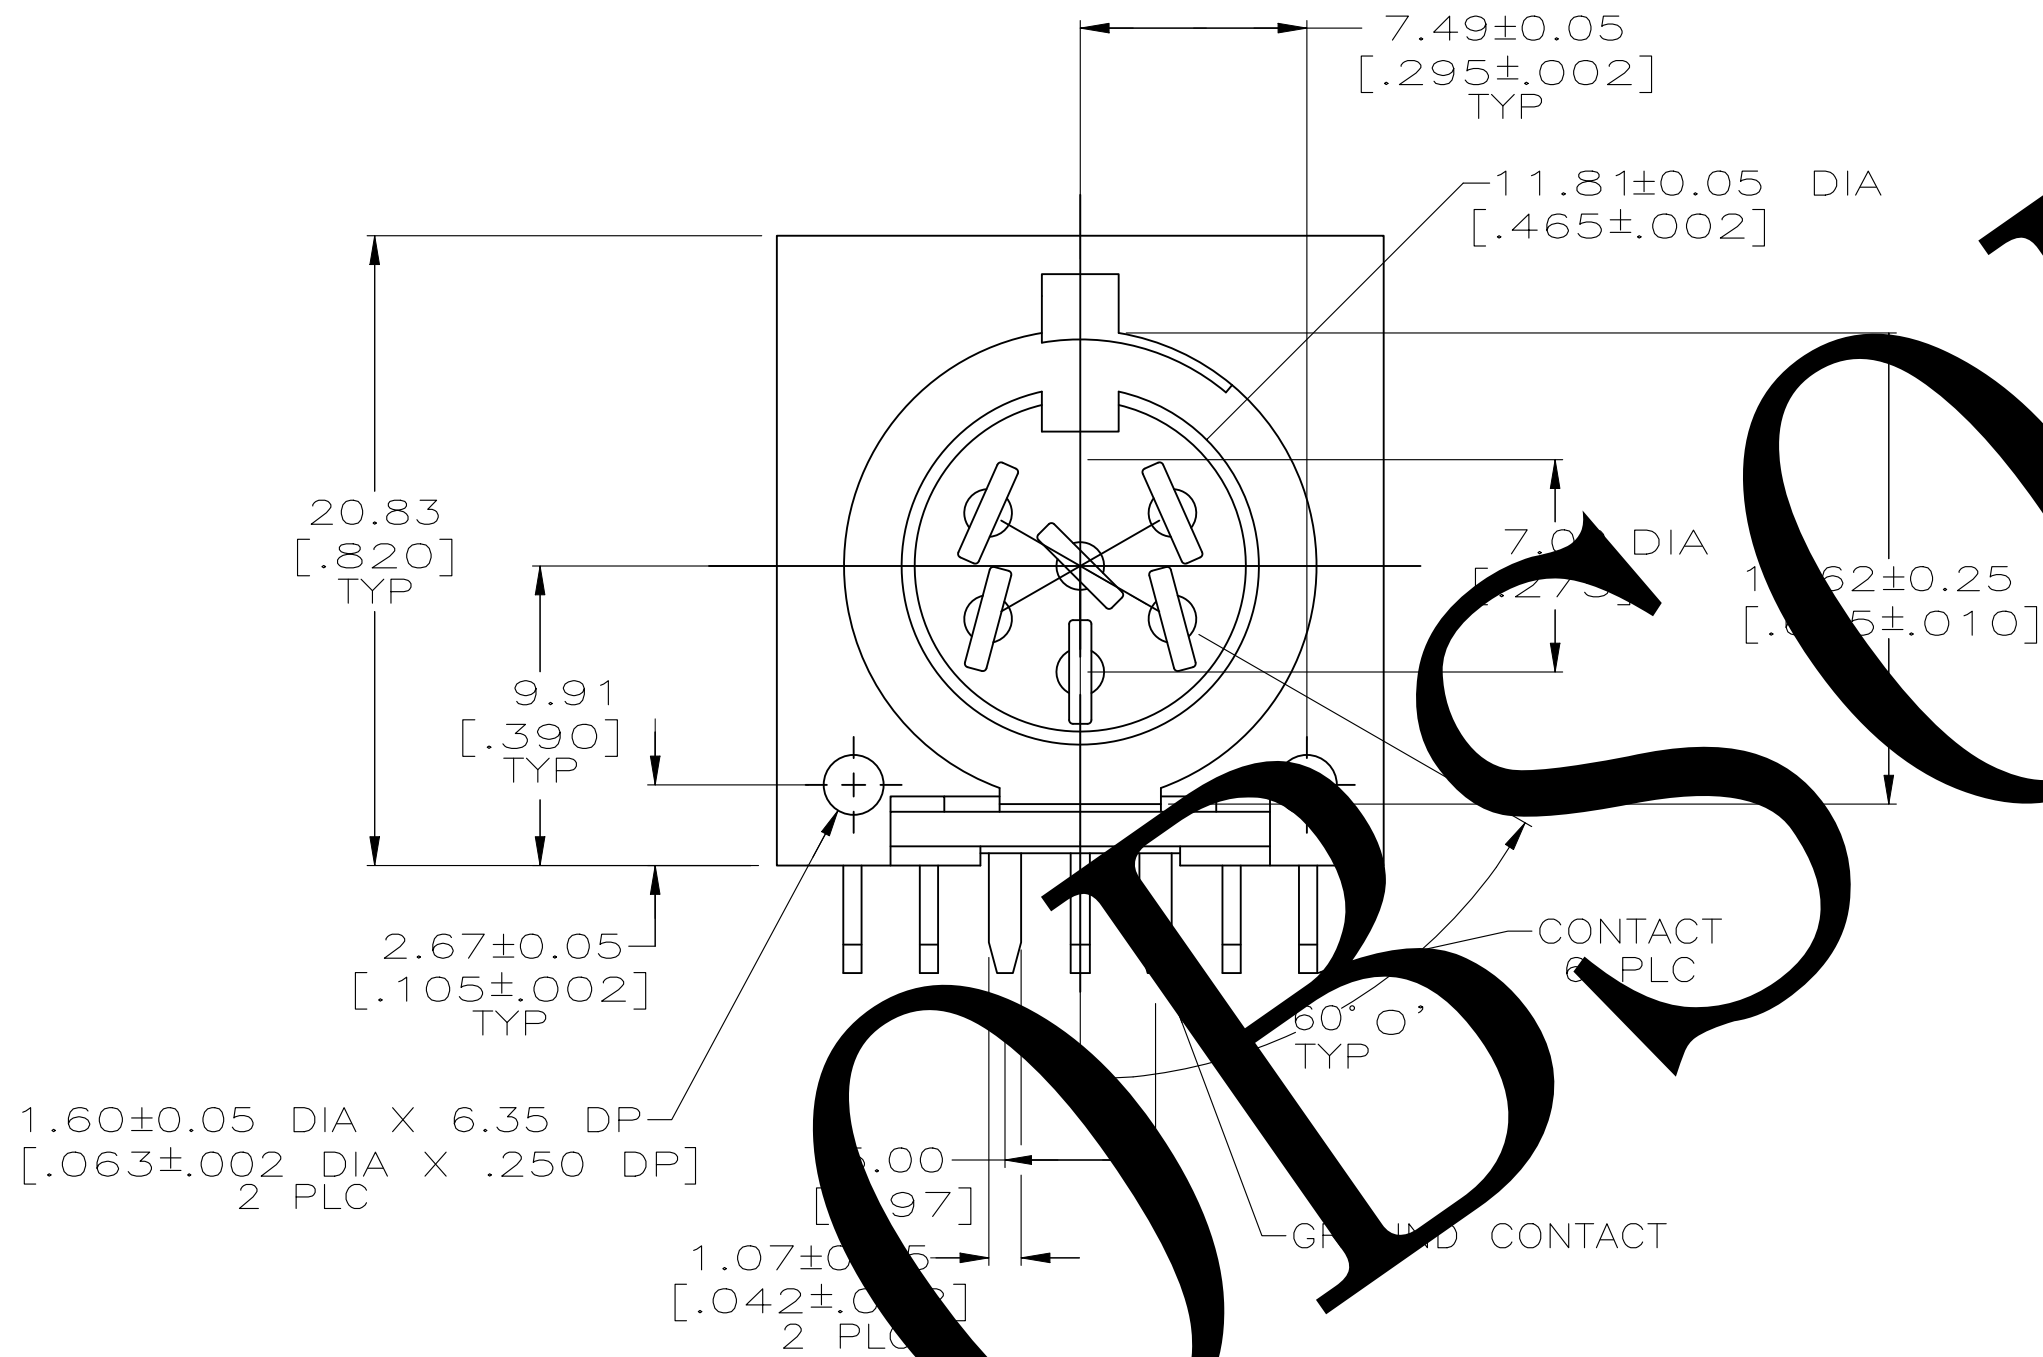

OBSOLETE	7	9-211509-0
OBSOLETE	2	211509-1
FINISH		PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN A.STAUB BG 8/12/91	TE Connectivity		
DIMENSIONS: mm [INCHES]		CHK -			
		APVD -	NAME RECEPTACLE ASSY, RIGHT ANGLE, 6 POSITION, CIRCULAR DIN		
		PRODUCT SPEC 108-10047			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC 114-40025	SIZE A2		CAGE CODE 00779
		0 PLC ± -	DRAWING NO C-211509		RESTRICTED TO -
MATERIAL 1		1 PLC ± -	WEIGHT 0.000000		SCALE 4:1
SEE TABLE		2 PLC ± 0.13[.005]	SHEET 1 OF 1		REV H3
		3 PLC ± -	CUSTOMER DRAWING		
		4 PLC ± -			
		ANGLES ± -			
		FINISH			