


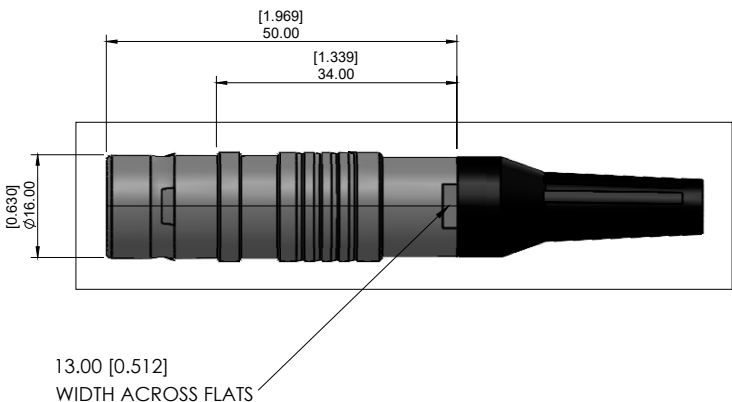

SPECIFICATIONS:

MATERIALS:

HOUSING (INTERNAL):	NICKEL PLATED BRASS
CONTACTS:	GOLD PLATED OVER NICKEL PLATED COPPER ALLOY
SHELL AND COLLET NUT:	CHROME PLATED BRASS OR 316F STAINLESS STEEL
INSULATOR:	PPS (HIGH TEMPERATURE)
STRAIN RELIEF (BOOT):	THERMOPLASTIC POLYURETHANE
ORING:	SILICONE

MECHANICAL:

DURABILITY:	5000 CYCLES
MAXIMUM TORQUE:	2.0 Nm [17.7 IN/LBS]
SHIELDING:	75dB @ 10MHz 40dB @ 1GHz

ENVIRONMENT:

OPERATING TEMPERATURE:	-40°C TO +200°C
PROCESS TEMPERATURE:	260°C FOR 5 SECONDS
WATER PROOF:	IP67

CHART A

● = KEY LOCATION

VIEW FROM TERMINATION END

2 POSITION 16 AWG MAX. 20.5 AMP MAX. PIN Ø = 2.00 [0.079] CONTACT RESISTANCE = 3 mΩ TEST VOLTAGE = 2100V WORKING VOLTAGE = 700V	3 POSITION 18 AWG MAX. 17 AMP MAX. PIN Ø = 1.60 [0.063] CONTACT RESISTANCE = 4 mΩ TEST VOLTAGE = 2400V WORKING VOLTAGE = 800V	4 POSITION 20 AWG MAX. 15 AMP MAX. PIN Ø = 1.30 [0.051] CONTACT RESISTANCE = 5 mΩ TEST VOLTAGE = 1850V WORKING VOLTAGE = 615V	6 POSITION 20 AWG MAX. 12 AMP MAX. PIN Ø = 1.30 [0.051] CONTACT RESISTANCE = 5 mΩ TEST VOLTAGE = 1350V WORKING VOLTAGE = 450V	8 POSITION 22 AWG MAX. 10 AMP MAX. PIN Ø = 0.90 [0.035] CONTACT RESISTANCE = 6 mΩ TEST VOLTAGE = 1500V WORKING VOLTAGE = 500V	
10 POSITION 22 AWG MAX. 8 AMP MAX. PIN Ø = 0.90 [0.035] CONTACT RESISTANCE = 6 mΩ TEST VOLTAGE = 1450V WORKING VOLTAGE = 500V	12 POSITION 24 AWG MAX. 7 AMP MAX. PIN Ø = 0.70 [0.028] CONTACT RESISTANCE = 7.5 mΩ TEST VOLTAGE = 1250V WORKING VOLTAGE = 480V	14 POSITION 24 AWG MAX. 6.5 AMP MAX. PIN Ø = 0.70 [0.028] CONTACT RESISTANCE = 7.5 mΩ TEST VOLTAGE = 1150V WORKING VOLTAGE = 380V	16 POSITION 24 AWG MAX. 6 AMP MAX. PIN Ø = 0.70 [0.028] CONTACT RESISTANCE = 7.5 mΩ TEST VOLTAGE = 950V WORKING VOLTAGE = 315V	19 POSITION 24 AWG MAX. 5 AMP MAX. PIN Ø = 0.70 [0.028] CONTACT RESISTANCE = 7.5 mΩ TEST VOLTAGE = 950V WORKING VOLTAGE = 315V	26 POSITION 28 AWG MAX. 1.5 AMP MAX. PIN Ø = 0.50 [0.020] CONTACT RESISTANCE = 10 mΩ TEST VOLTAGE = 950V WORKING VOLTAGE = 315V

822K YYY - 1 7 3 L YY 1

SERIES 16.00 [0.630]	1 = GOLD FLASH
# OF POSITIONS (Ex. 002) **SEE CHART A**	COLLET SIZE **SEE CHART B**
1 = MALE	
CABLE MOUNT	3 = NICKEL/CHROME PLATED SHELL & NUT S = 316F STAINLESS SHELL & NUT

CHART B

COLLET SIZE	WIRE DIAMETER
50	4.30 [0.169] ~ 5.20 [0.205]
60	5.30 [0.209] ~ 6.20 [0.244]
70	6.30 [0.248] ~ 7.20 [0.283]
80	7.30 [0.287] ~ 8.20 [0.323]
90	8.60 [0.339] ~ 9.00 [0.354]

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:
M. SIGMON

DATE:
02/19/2016

UNITS = mm [inch]

DO NOT SCALE FROM DRAWING

NorComp

SCALE:
NTS

SHEET OF
1 1

REV
13

DWG NO.

822KYYY-173LYY1