
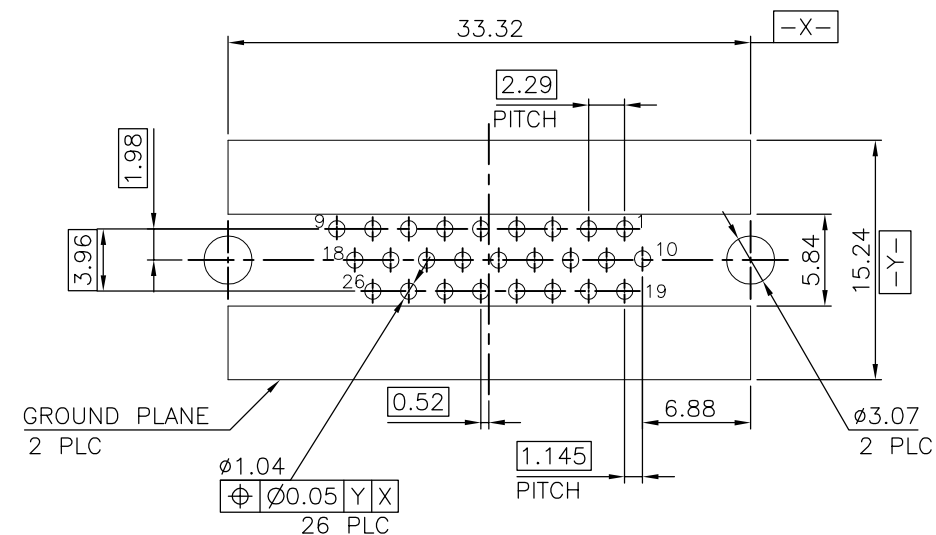
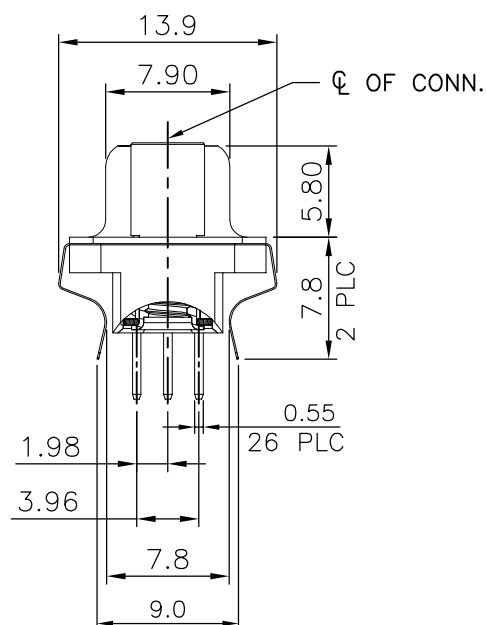


YEAR — WEEK



TOLERANCE: ± 0.05
RECOMMENDED PCB LAYOUT
 (TOP VIEW)

4 OBSOLETE	GOLD FLASH	5786073-4
	15u"	5786073-3
OBSOLETE	30u"	5786073-1
	FINISH	PART NO.

CUSTOMER DRAWING



TE Connectivity

D-SUB CONNECTOR, VERTICAL 26POS,
FEMALE FRONT METAL SHELL

RESTRICTED TO

A.3|00779|C-5786073

REV A 0

AMP 1470-19 REV 31MAR2000


4

3



2

1


LOC	DIST	REVISIONS				
DW	—	P	LTR	DESCRIPTION	DATE	APVD
				SEE SHEET 1.		

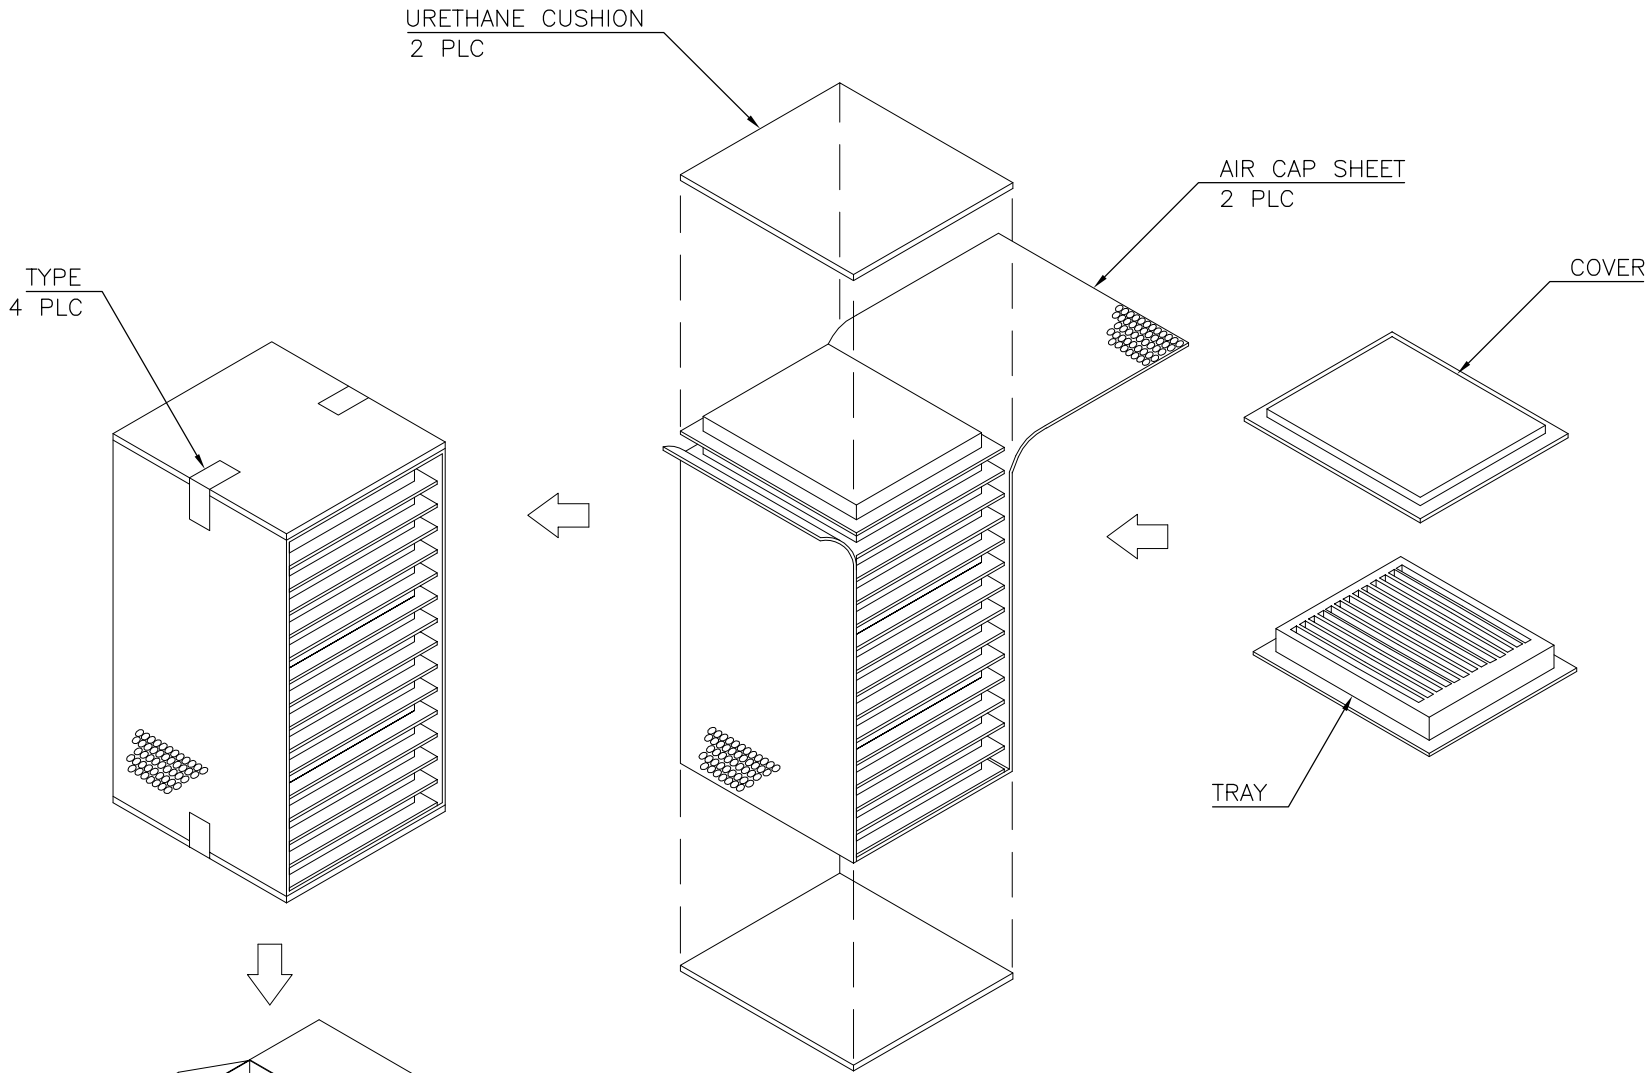

- NOTE:
1. MATERIAL:
TRAY: PVC.
BOX: CORRUGATED FIBERBOARD.
2. DIMENSION:
TRAY: L=345, W=230, H=16.5
SHIPPING CARTON: L=361, W=245, H=272

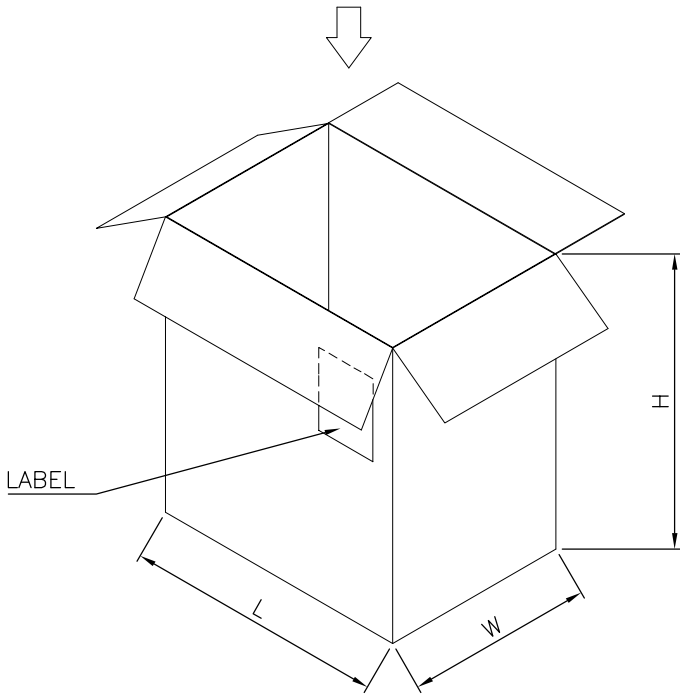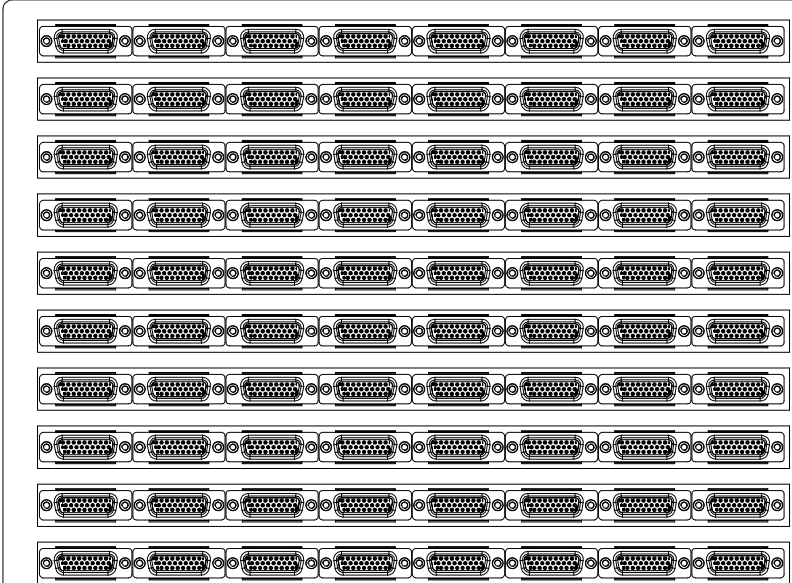

9.65Kg	8.30Kg	80	15	1200
GROSS WEIGHT	NET WEIGHT	PCS/ TRAY	TRAYS/ BOX	PCS/BOX

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN		 TE Connectivity	
DIMENSIONS: MM		CHK			
		APVD			
		PRODUCT SPEC			
MATERIAL SEE NOTE		WEIGHT		NAME D-SUB CONNECTOR, VERTICAL 26POS, FEMALE FRONT METAL SHELL	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± - FINISH		APPLICATION SPEC		SIZE A3	
SEE NOTE		CUSTOMER DRAWING		CAGE CODE 00779	
				DRAWING NO C=5786073	
				RESTRICTED TO —	
				SCALE —	
				SHEET 2 OF 2	
				REV A2	