
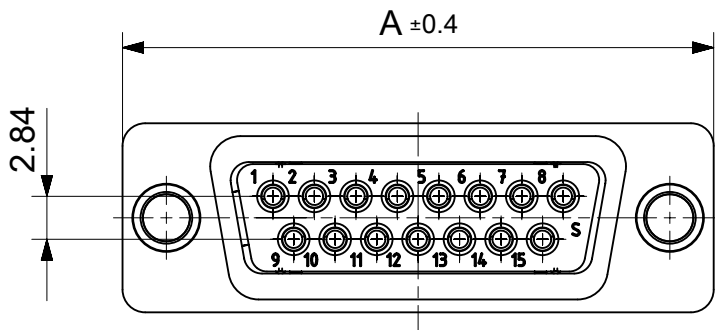
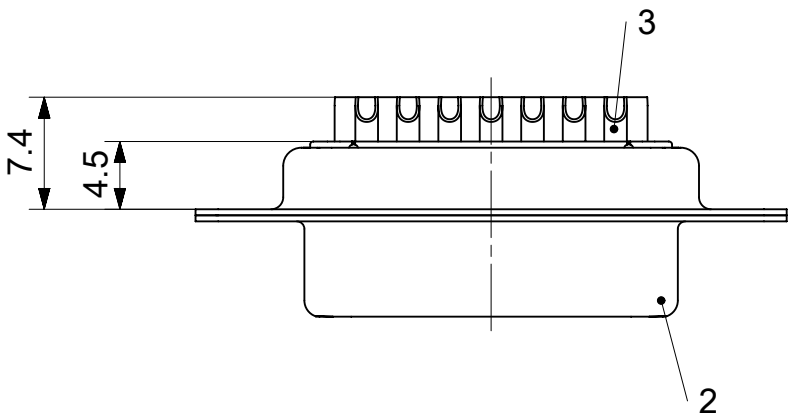
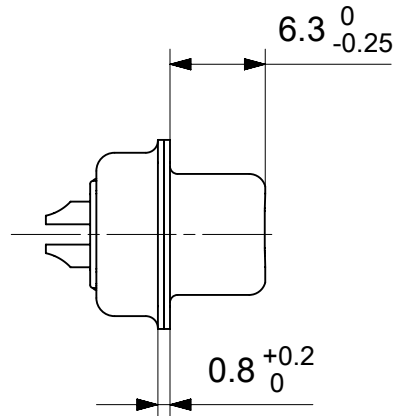


RoHS compliant
by exemption

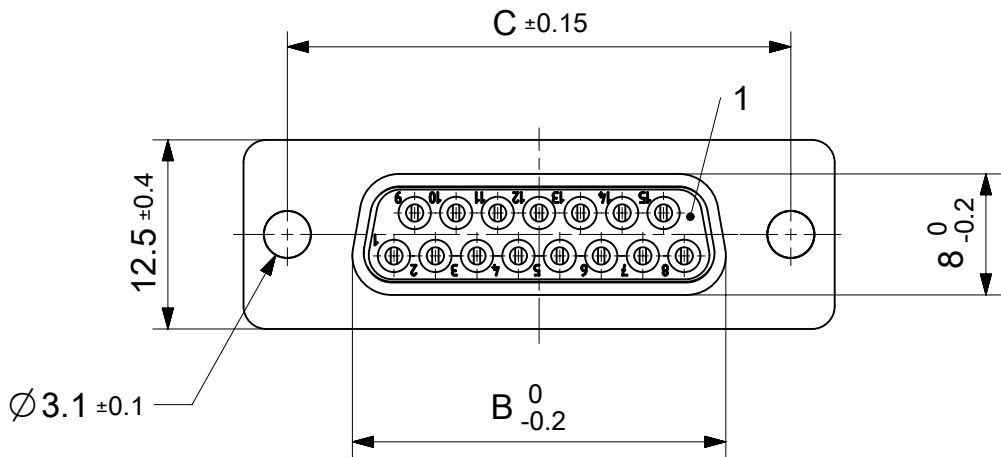

FCT Part number:


Fxx*1)S0G1A

e.g. F15S0G1A

*1) xx No. of contacts 09, 15, 25 or 37

Material Number	xx*1)	A[mm]	B[mm]	C[mm]
1731090643	09	30.8	16.4	25
1731090310	15	39.1	24.7	33.3
1731090647	25	53	38.5	47.04
1731090312	37	69.3	54.9	63.5

3	xx	Signal contact	S0 / Brass	AuroPur / AWG 20
2	1	Shell	Steel	tin plated
1	1	Insulator	PBT (-55°C to +125°C) acc. UL94V-0	white
No.	Pc.	Part	Type Description/Material	Surface plating/ Color/Class

MEASUREMENTS WITHOUT TOLERANCE ACC TO ISO 2768-m					REPLACEMENT FOR DOCUMENT NUMBER: FxxS0G1A													
FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																	
	DIMENSION UNITS		SCALE		CURRENT REV DESC:					molex								
	mm		2:1															
	GENERAL TOLERANCES (UNLESS SPECIFIED)																	
	ANGULAR TOL ± °																	
	4 PLACES		±		FCT D-SUB MINIATURE CONNECTOR													
	3 PLACES		±															
2 PLACES		±																
1 PLACE		±																
DIVISIONAL SYMBOLS	0 PLACES		±		PRODUCT CUSTOMER DRAWING													
	INITIAL REVISION:		DOCUMENT NUMBER							DOC TYPE		DOC PART		REVISION				
	DRWN: SKANDB																	
	APPR: MTEUBEL																	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		FIRST ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER			SHEET NUMBER					
				A3-SIZE		173109		SEE TABLE		GENERAL MARKET			1 OF 1					