
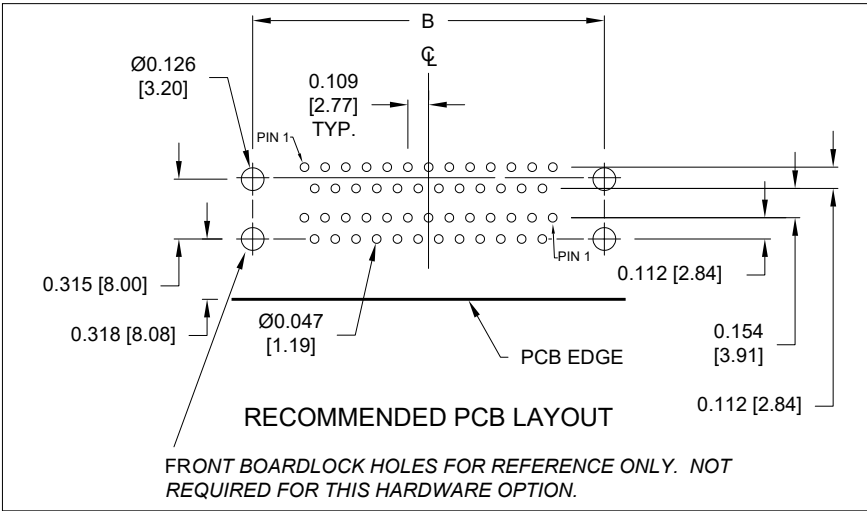


DESCRIPTION: 0.900 CENTER DUAL PORT D-SUB - MALE OVER FEMALE

25 PIN
SHOWN

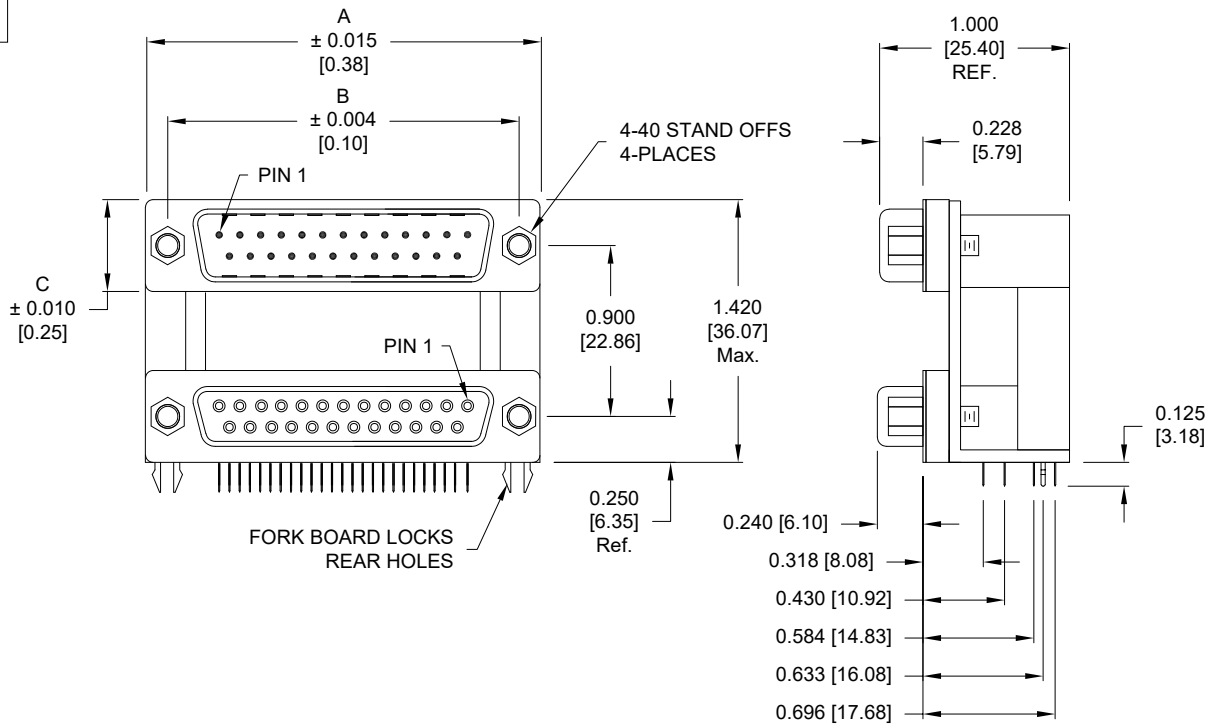

SPECIFICATIONS:

MATERIALS:	
HOUSING:	UL94 V-0 RATED, BLACK PA9T, 260° PROCESS TEMP.
CONTACTS:	GOLD PLATED BRASS (SEE P/N KEY BELOW)
SHELL:	NICKEL PLATED STEEL
ELECTRICAL:	
RATED CURRENT:	5A
INSULATOR RESISTANCE:	1,000 Ohms MIN.
DIELECTRIC STRENGTH:	1,000 VAC RMS
WORKING VOLTAGE:	250V
OPERATING TEMPERATURE:	-55°C TO +105°C

DIMENSIONS:				
	9	15	25	37
A	1.204 [30.58]	1.535 [38.99]	2.078 [52.78]	2.724 [69.19]
B	0.984 [24.99]	1.312 [33.32]	1.850 [46.99]	2.500 [63.50]
C	0.494 [12.55]	0.494 [12.55]	0.494 [12.55]	0.494 [12.55]

179-YYY-413R671

SERIES _____
POSITIONS _____
009
015
025
037
GENDER _____
31 = FEMALE OVER MALE
41 = MALE OVER FEMALE
51 = FEMALE OVER FEMALE
61 = MALE OVER MALE
SHELL PLATING _____
3 = NICKEL
HARDWARE OPTIONS _____
67 = 4-40 STAND OFFS/BOARD LOCKS (REAR)
PLATING OPTIONS _____
1 = SELECTIVE (GF MATING AREA / TIN PLATED TAILS)
A = 30u" GOLD MATING AREA/GOLD FLASH TAILS
9 = 30u" GOLD MATING AREA/TIN TAILS

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: C. SMITH
DATE: 03/30/07

UNITS = inch [mm] DO NOT SCALE FROM DRAWING

NorComp

SCALE: NTS	SHEET 1 OF 1	REV 7
DWG NO.	179-YYY-413R671	