
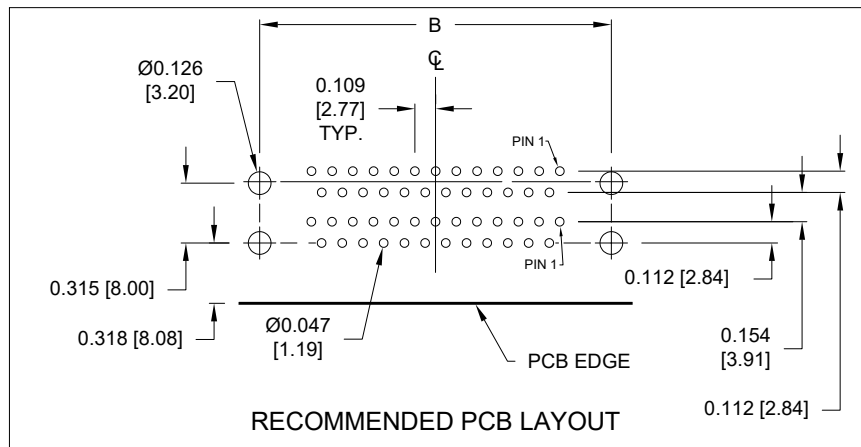


DESCRIPTION: 0.625 CENTER DUAL PORT D-SUB - FEMALE OVER FEMALE

25 PIN
SHOWN

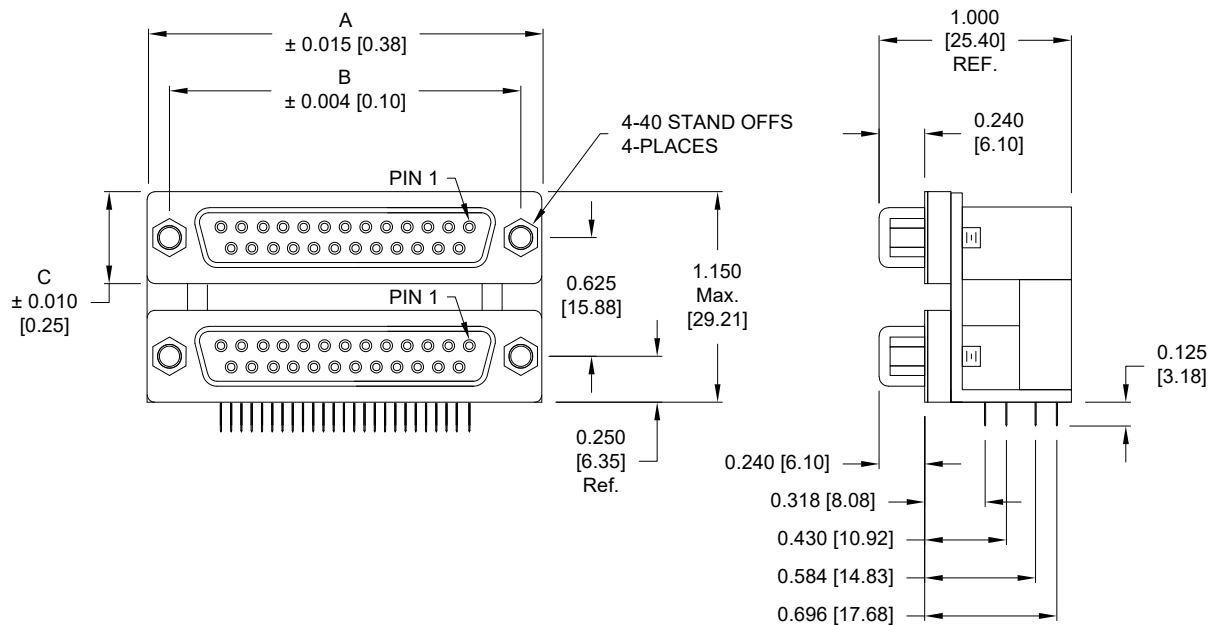

SPECIFICATIONS:

MATERIALS:

HOUSING:	UL94 V-0 RATED, BLACK PA9T, 260° PROCESS TEMP.
CONTACTS:	GOLD PLATED BRASS (SEE P/N KEY BELOW)
SHELL:	NICKEL PLATED STEEL

ELECTRICAL:

RATED CURRENT:	5A
INSULATOR RESISTANCE:	1,000 Ohms MIN.
DIELECTRIC STRENGTH:	1,000 VAC RMS
WORKING VOLTAGE:	250V
OPERATING TEMPERATURE:	-55°C TO +105°C

DIMENSIONS:

	9	15	25	37
A	1.204 [30.58]	1.535 [38.99]	2.078 [52.78]	2.724 [69.19]
B	0.984 [24.99]	1.312 [33.32]	1.850 [46.99]	2.500 [63.50]
C	0.494 [12.55]	0.494 [12.55]	0.494 [12.55]	0.494 [12.55]

189-YYY-513R481

SERIES	_____
POSITIONS	_____
009	_____
015	_____
025	_____
037	_____
GENDER	_____
31 = FEMALE OVER MALE	_____
41 = MALE OVER FEMALE	_____
51 = FEMALE OVER FEMALE	_____
61 = MALE OVER MALE	_____
SHELL PLATING	_____
3 = NICKEL	_____
HARDWARE OPTIONS	_____
48 = 4-40 STAND OFFS/METAL BRACKET	_____
PLATING OPTIONS	_____
1 = SELECTIVE (GF MATING AREA / TIN PLATED TAILS)	_____
A = 30u" GOLD MATING AREA/GOLD FLASH TAILS	_____
9 = 30u" GOLD MATING AREA/TIN TAILS	_____

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

C. SMITH

DATE:

03/30/07

UNITS = inch [mm]

DO NOT SCALE FROM DRAWING

NorComp

SCALE:
NTS

SHEET OF
1 1

REV
6

DWG NO.

189-YYY-513R481