
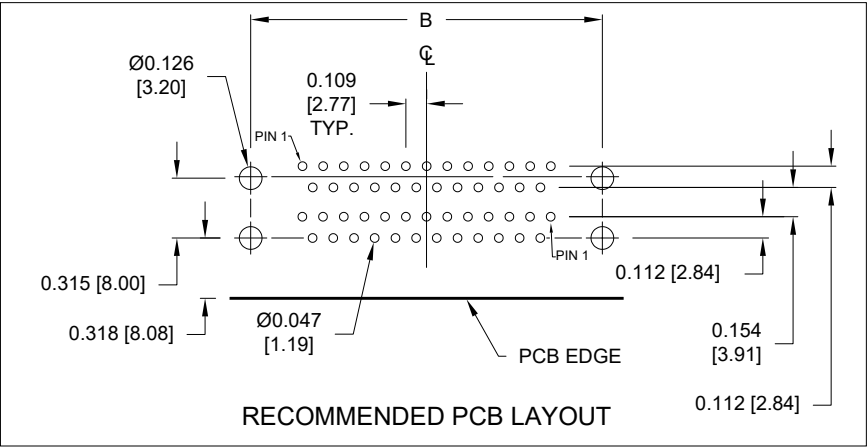


DESCRIPTION: 0.900 CENTER DUAL PORT D-SUB - MALE OVER FEMALE

25 PIN
SHOWN

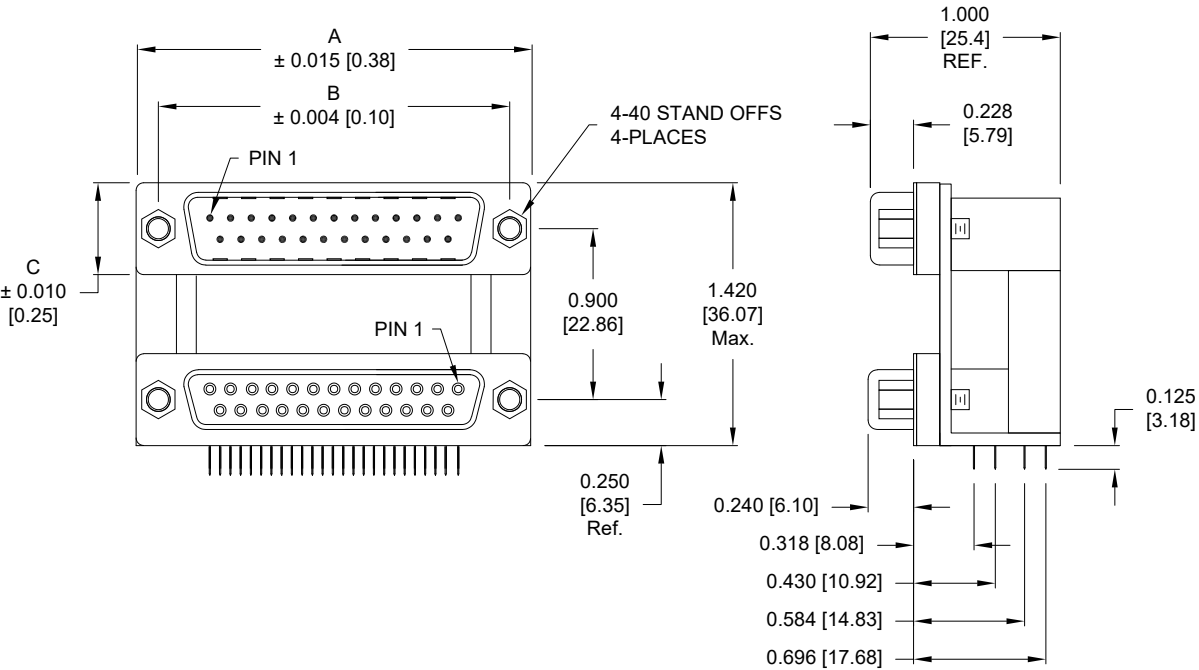

SPECIFICATIONS:

MATERIALS:	
HOUSING:	UL94 V-0 RATED, BLACK PA9T, 260° PROCESS TEMP.
CONTACTS:	GOLD PLATED BRASS (SEE P/N KEY BELOW)
SHELL:	NICKEL PLATED STEEL
ELECTRICAL:	
RATED CURRENT:	5A
INSULATOR RESISTANCE:	1,000 Ohms MIN.
DIELECTRIC STRENGTH:	1,000 VAC RMS
WORKING VOLTAGE:	250V
OPERATING TEMPERATURE:	-55°C TO +105°C

DIMENSIONS:				
	9	15	25	37
A	1.204 [30.58]	1.535 [38.99]	2.078 [52.78]	2.724 [69.19]
B	0.984 [24.99]	1.312 [33.32]	1.850 [46.99]	2.500 [63.50]
C	0.494 [12.55]	0.494 [12.55]	0.494 [12.55]	0.494 [12.55]

179-YYY-413R481

SERIES _____

POSITIONS _____

009 _____

015 _____

025 _____

037 _____

GENDER _____

31 = FEMALE OVER MALE

41 = MALE OVER FEMALE

51 = FEMALE OVER FEMALE

61 = MALE OVER MALE

SHELL PLATING _____

3 = NICKEL

HARDWARE OPTIONS _____

48 = 4-40 STAND OFFS/METAL BRACKET

PLATING OPTIONS _____

1 = SELECTIVE (GF MATING AREA / TIN PLATED TAILS)

A = 30u" GOLD MATING AREA/GOLD FLASH TAILS

9 = 30u" GOLD MATING AREA/TIN TAILS

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: C. SMITH

DATE: 03/30/07

UNITS = inch [mm]

DO NOT SCALE FROM DRAWING

NorComp

SCALE: NTS	SHEET 1 OF 1	REV 6
DWG NO.	179-YYY-413R481	