


DESCRIPTION: 0.750 CENTER DUAL PORT D-SUB - FEMALE OVER MALE

SPECIFICATIONS:

MATERIALS:
HOUSING: PA9T, UL94 V-0, BLACK
CONTACTS: GOLD PLATED BRASS (SEE P/N KEY BELOW)
SHELL: NICKEL PLATED STEEL
BRACKET: NICKEL PLATED ZINC ALLOY
BOARDLOCK: TIN PLATED BRASS

ELECTRICAL:
RATED CURRENT: 5A
WORKING VOLTAGE: 250V
DIELECTRIC STRENGTH: 1000 VAC RMS
INSULATION RESISTANCE: 1000 Ohms MIN.

ENVIRONMENT:
OPERATING TEMPERATURE: -55°C TO +105°C

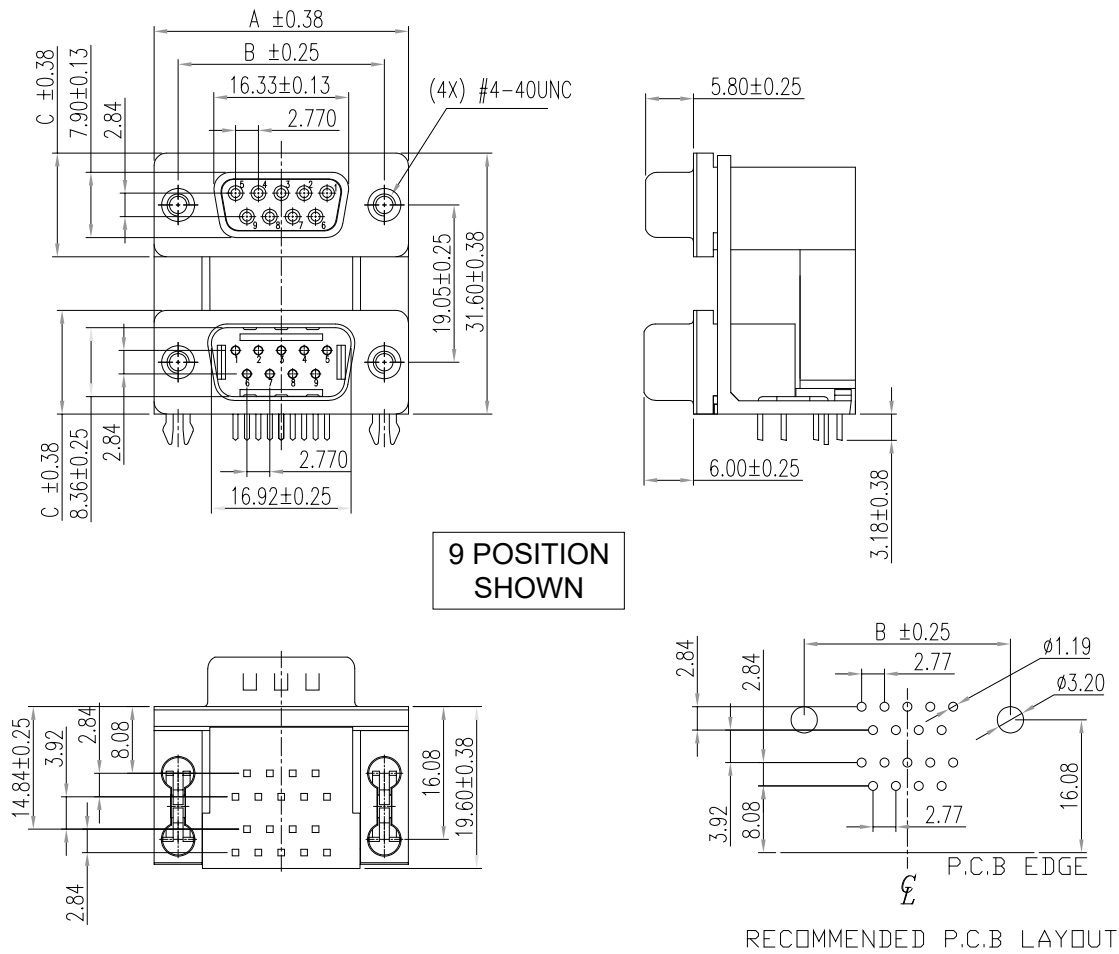

178-YYY-313R691

SERIES _____
POSITIONS _____
009
015
025
037
GENDER _____
31 = FEMALE OVER MALE
41 = MALE OVER FEMALE
51 = FEMALE OVER FEMALE
61 = MALE OVER MALE
SHELL PLATING _____
3 = NICKEL
HARDWARE OPTIONS _____
69 = 4-40 INSERTS/BOARD LOCKS (REAR)
PLATING OPTIONS _____
1 = SELECTIVE (GF MATING AREA / TIN PLATED TAILS)
A = 30u" GOLD MATING AREA/GOLD FLASH TAILS
9 = 30u" GOLD MATING AREA/TIN TAILS

DIMENSIONS:				
POSITION	9	15	25	37
A	30.81	38.99	52.78	69.19
B	24.99	33.32	46.99	63.50
C	12.55	12.55	12.55	12.55

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:
C. SMITH

DATE:
03/30/2007

UNITS = mm

DO NOT SCALE FROM DRAWING

NorComp

SCALE:
NTS

SHEET OF
1 1

REV
9

DWG NO.

178-YYY-313R691