
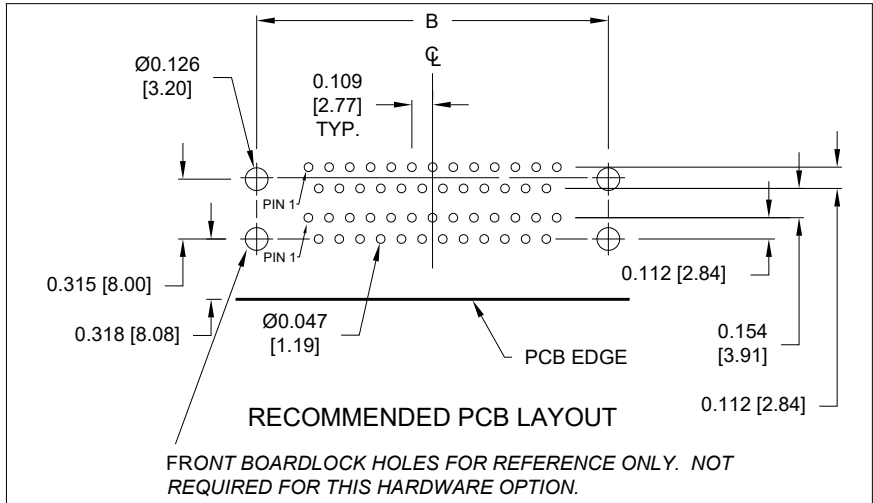


DESCRIPTION: 0.750 CENTER DUAL PORT D-SUB - MALE OVER MALE

25 PIN  
SHOWN

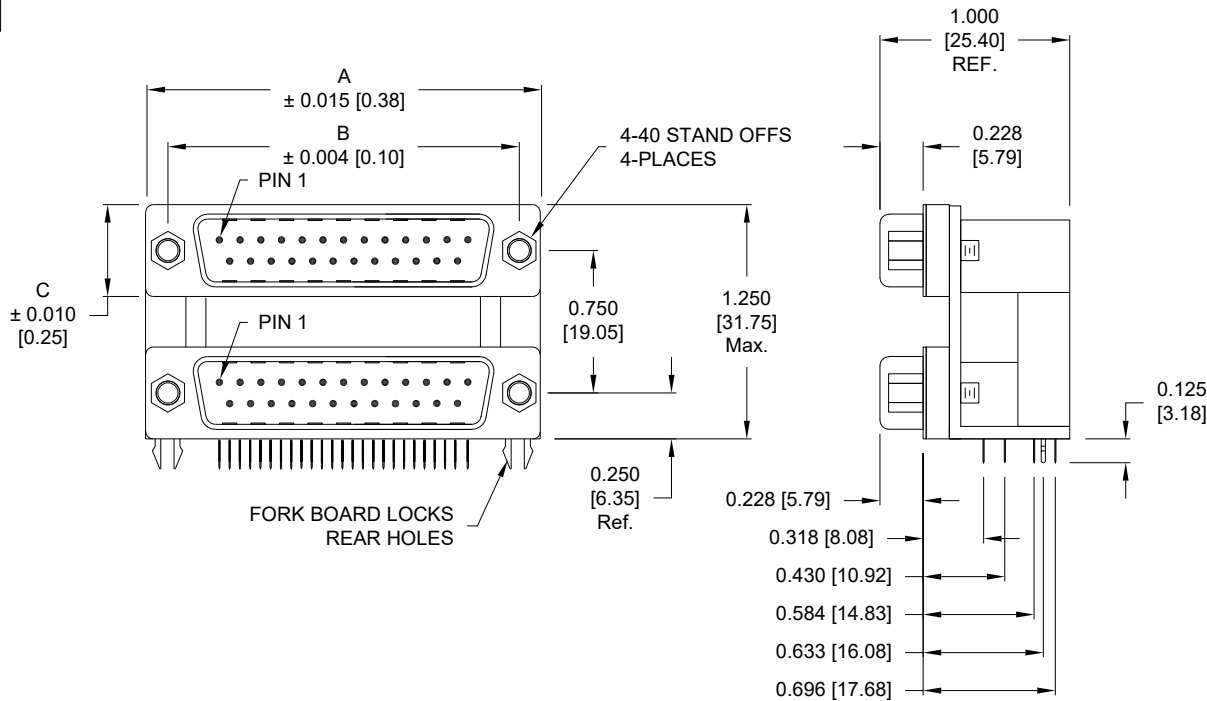

SPECIFICATIONS:

MATERIALS:

HOUSING: UL94 V-0 RATED, BLACK PA9T, 260° PROCESS TEMP.  
CONTACTS: GOLD PLATED BRASS (SEE P/N KEY BELOW)  
SHELL: NICKEL PLATED STEEL

ELECTRICAL:

RATED CURRENT: 5A  
INSULATOR RESISTANCE: 1,000 Ohms MIN.  
DIELECTRIC STRENGTH: 1,000 VAC RMS  
WORKING VOLTAGE: 250V  
OPERATING TEMPERATURE: -55°C TO +105°C

DIMENSIONS:

|   | 9             | 15            | 25            | 37            |
|---|---------------|---------------|---------------|---------------|
| A | 1.204 [30.58] | 1.535 [38.99] | 2.078 [52.78] | 2.724 [69.19] |
| B | 0.984 [24.99] | 1.312 [33.32] | 1.850 [46.99] | 2.500 [63.50] |
| C | 0.494 [12.55] | 0.494 [12.55] | 0.494 [12.55] | 0.494 [12.55] |

178-YYY-613R671

SERIES \_\_\_\_\_  
POSITIONS \_\_\_\_\_  
009  
015  
025  
037  
GENDER \_\_\_\_\_  
31 = FEMALE OVER MALE  
41 = MALE OVER FEMALE  
51 = FEMALE OVER FEMALE  
61 = MALE OVER MALE  
SHELL PLATING \_\_\_\_\_  
3 = NICKEL  
HARDWARE OPTIONS \_\_\_\_\_  
67 = 4-40 STAND OFFS/BOARD LOCKS (REAR)  
PLATING OPTIONS \_\_\_\_\_  
1 = SELECTIVE (GF MATING AREA / TIN PLATED TAILS)  
A = 30u" GOLD MATING AREA/GOLD FLASH TAILS  
9 = 30u" GOLD MATING AREA/TIN TAILS

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:  
C. SMITH  
DATE:  
03/30/07

UNITS = inch [mm]

DO NOT SCALE FROM DRAWING

NorComp

| SCALE:  | SHEET           | OF | REV |
|---------|-----------------|----|-----|
| NTS     | 1               | 1  | 8   |
| DWG NO. | 178-YYY-613R671 |    |     |