
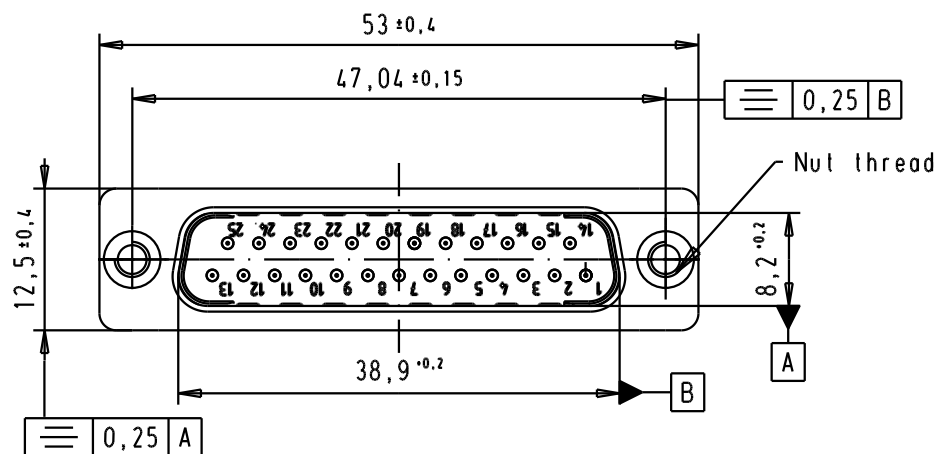


Solder bucket for AWG 20

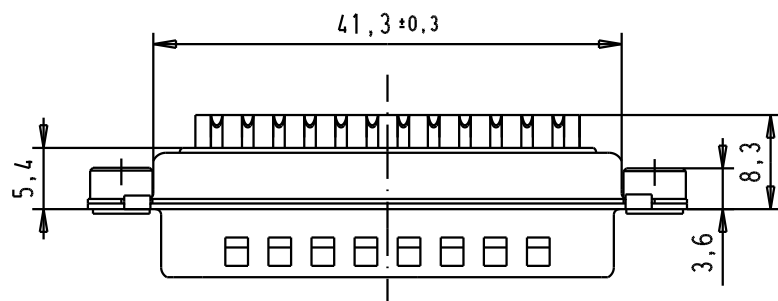

SPECIFICATION

Mating Cycles	500
Filter type	C
Capacitance	470pf±20%
Working Voltage	100v
Current Rating	7.5A
Insulation Resistance	>1GΩ

FREQUENCY (MHz)	ATTENUATION (dB)
5	-
10	1dB
50	10dB
100	15dB
500	35dB
1000	32dB

							Dat.	Name		D-Sub, male, Straight 25 Poles, turned solder buckets, tin plated shell with dimples and clinch nuts	Mo?Mslab/ Scale 1.5:1
						Detail.	8-JUL-02	CV			
						Insp.					
						Stand.					
09643217228	M3		33423	06/02/06	JMDR	HARTING EURL F-95972 Paris				TB 0964321722x	Blatt/ Page 1 / 1
09643217227	UNC 4-40		31058	8-JUL-02	CV						
Part number	Nut thread		Mod.	Dat.	Name						