

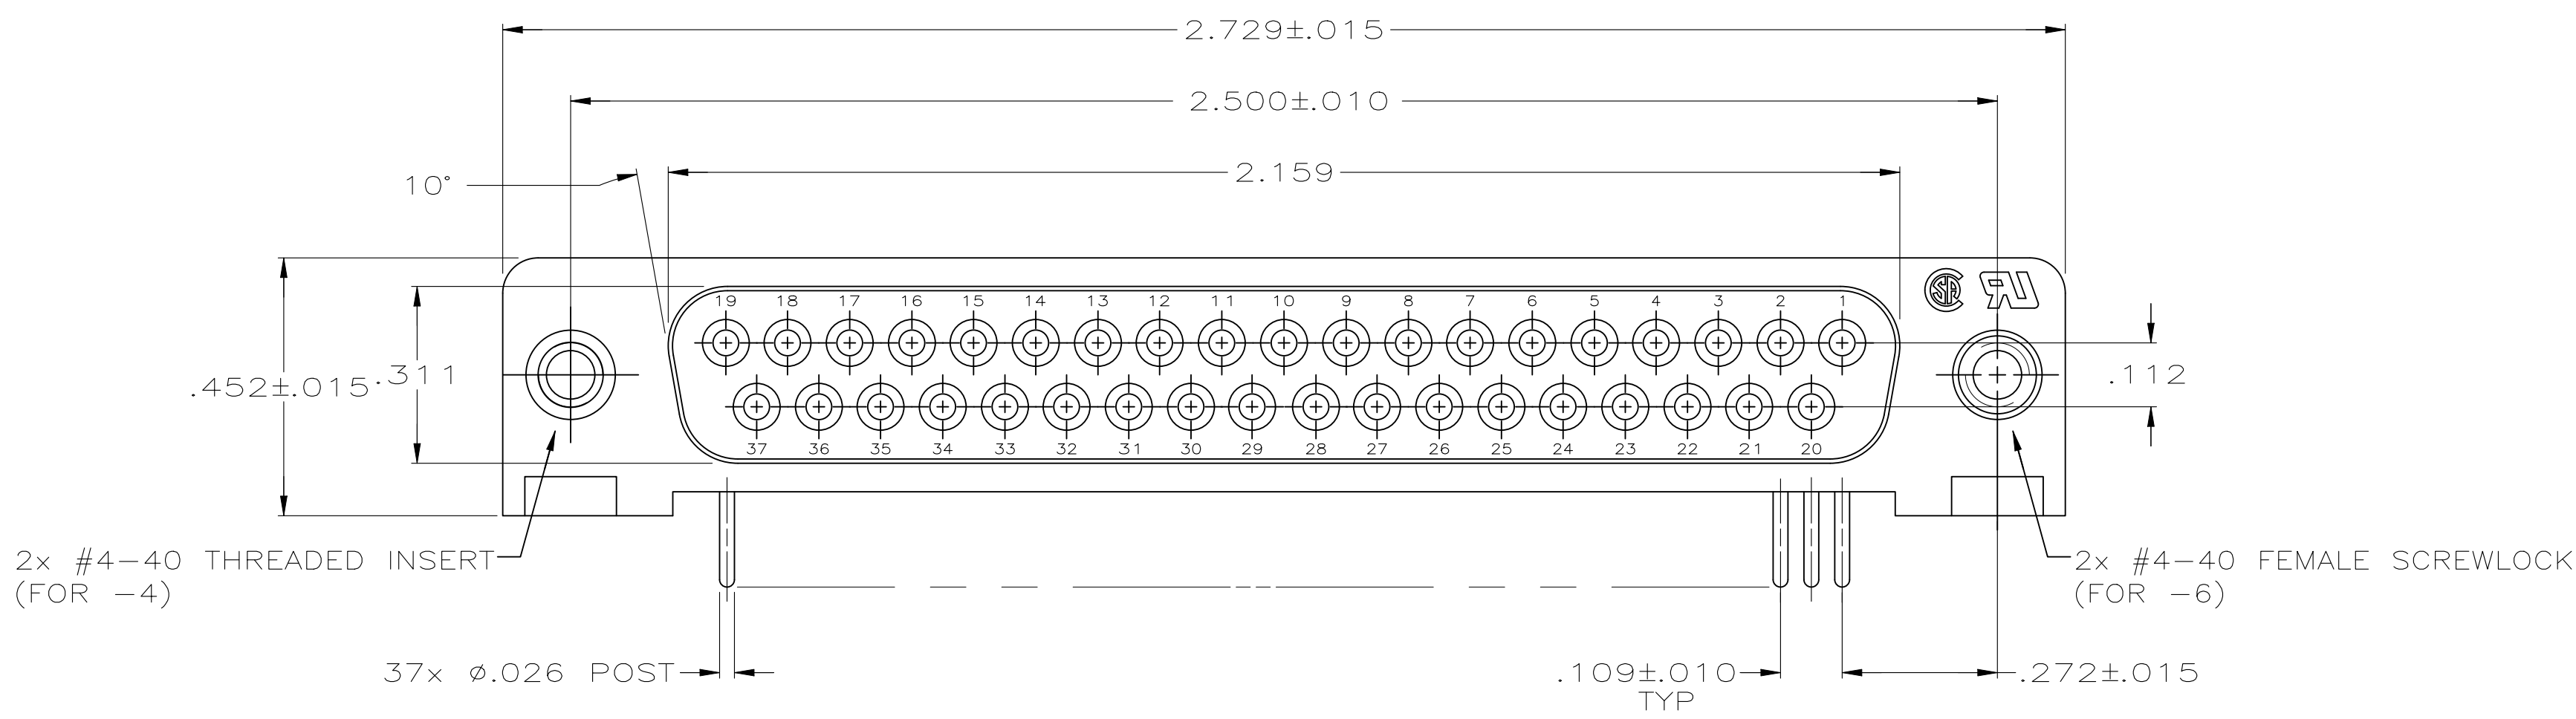
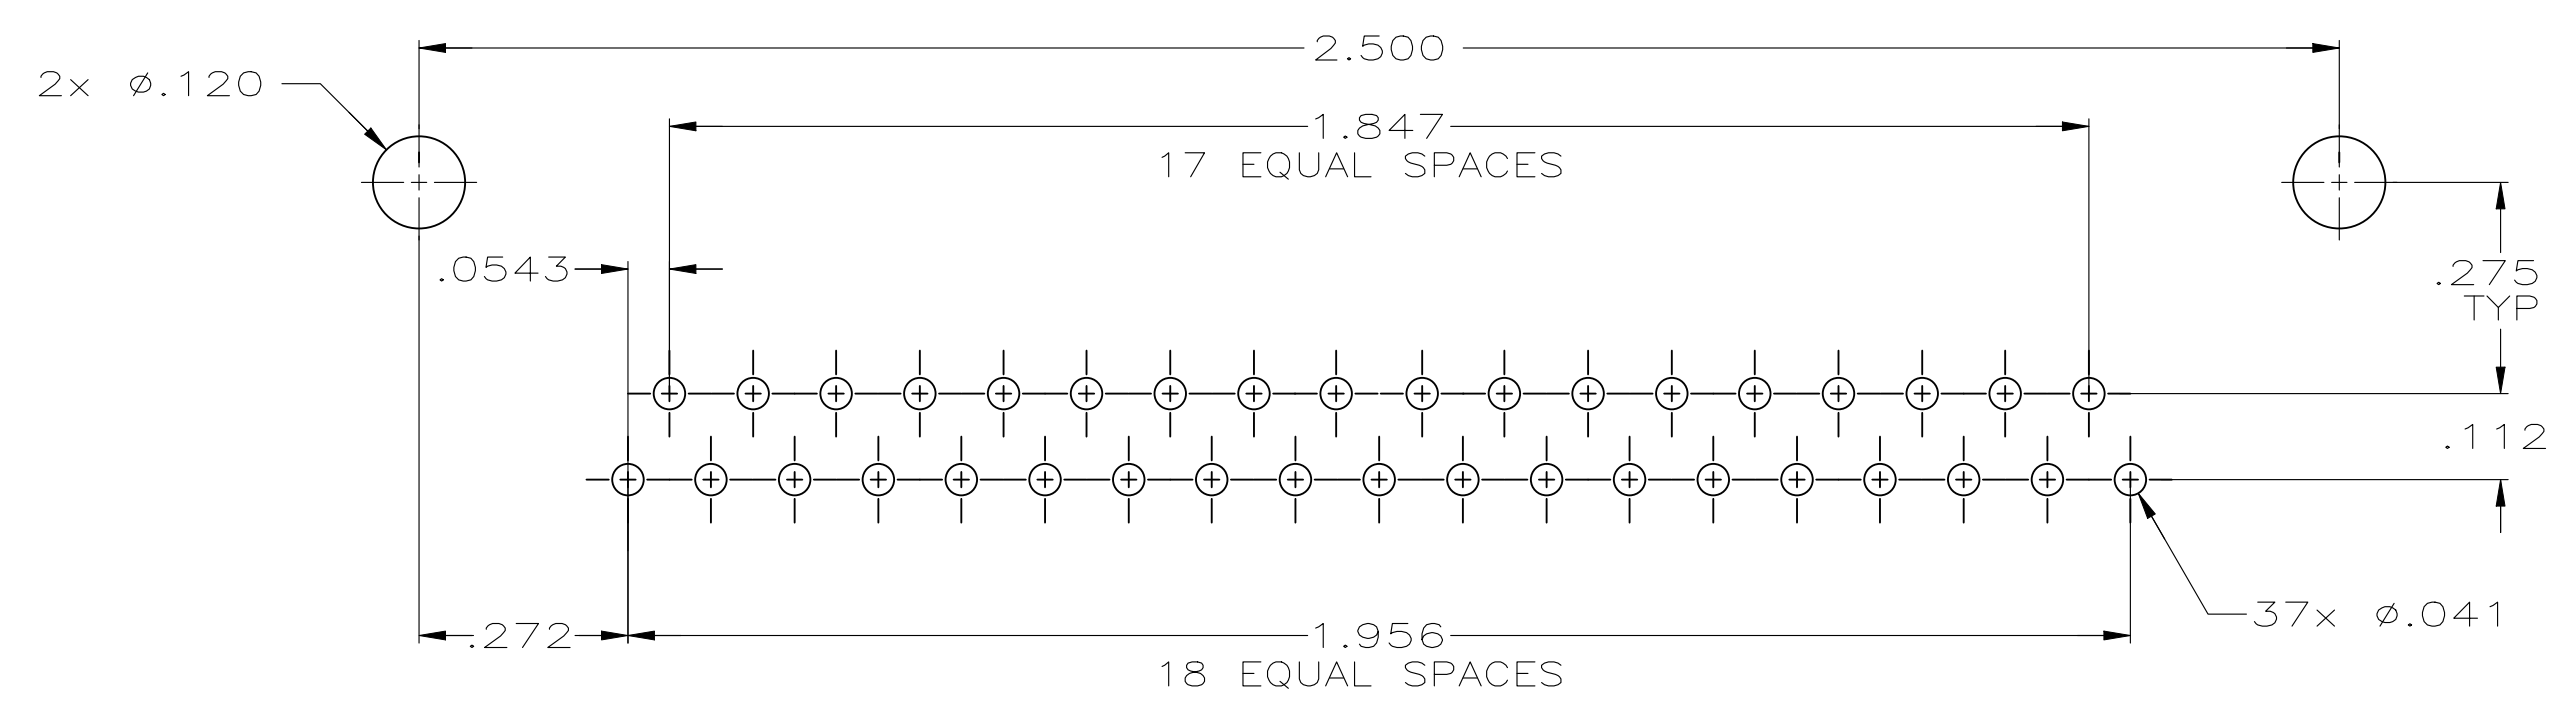


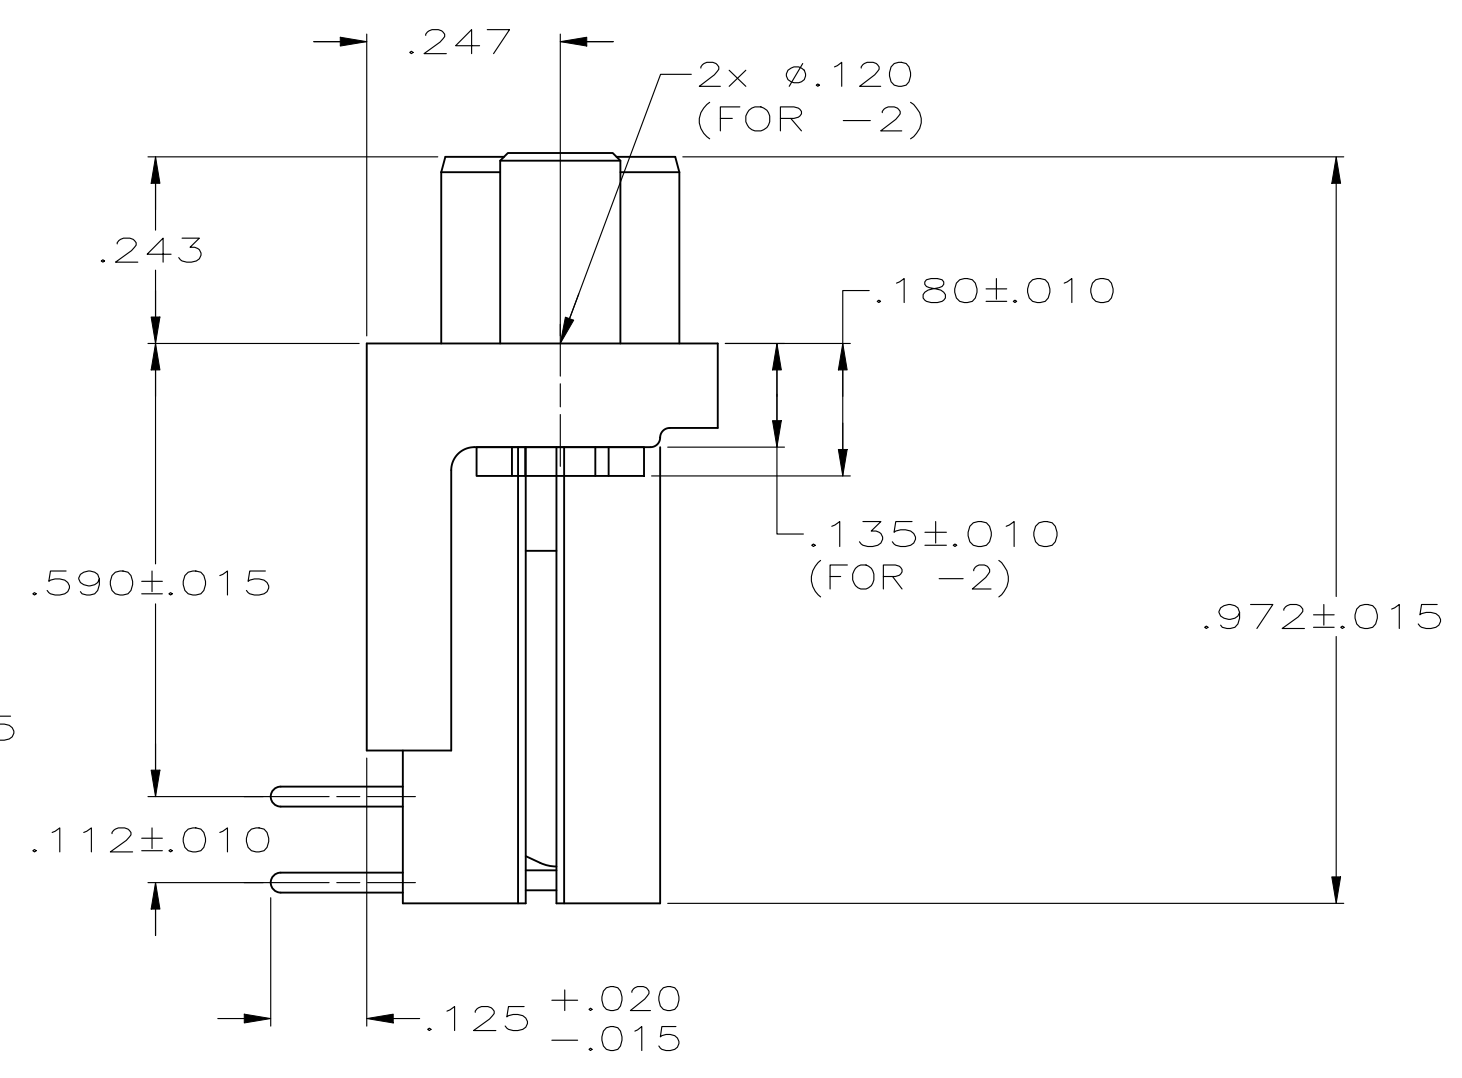

- 1
- HOUSING: FLAME RETARDANT, 94V-0 RATED, GLASS FILLED, NYLON OR POLYESTER, COLOR: BLACK
CONTACTS: PHOS BRONZE.
INSERTS & SCREWLOCKS: ZINC.
- 2
- REFER TO APPLICATION SPEC FOR RECOMMENDED P.C. BOARD MOUNTING DIMENSIONS FOR AUTOMATIC INSERTION.
- 3
- CONTACTS: PLATED WITH .000030 MIN GOLD FOR LENGTH OF .055 MIN FROM MATING END, .000100 MIN TIN ON SOLDER END, ALL OVER .000050 MIN NICKEL ON ENTRIE CONTACT.
INSERTS & SCREWLOCKS: CLEAR CHROMATE COATING.

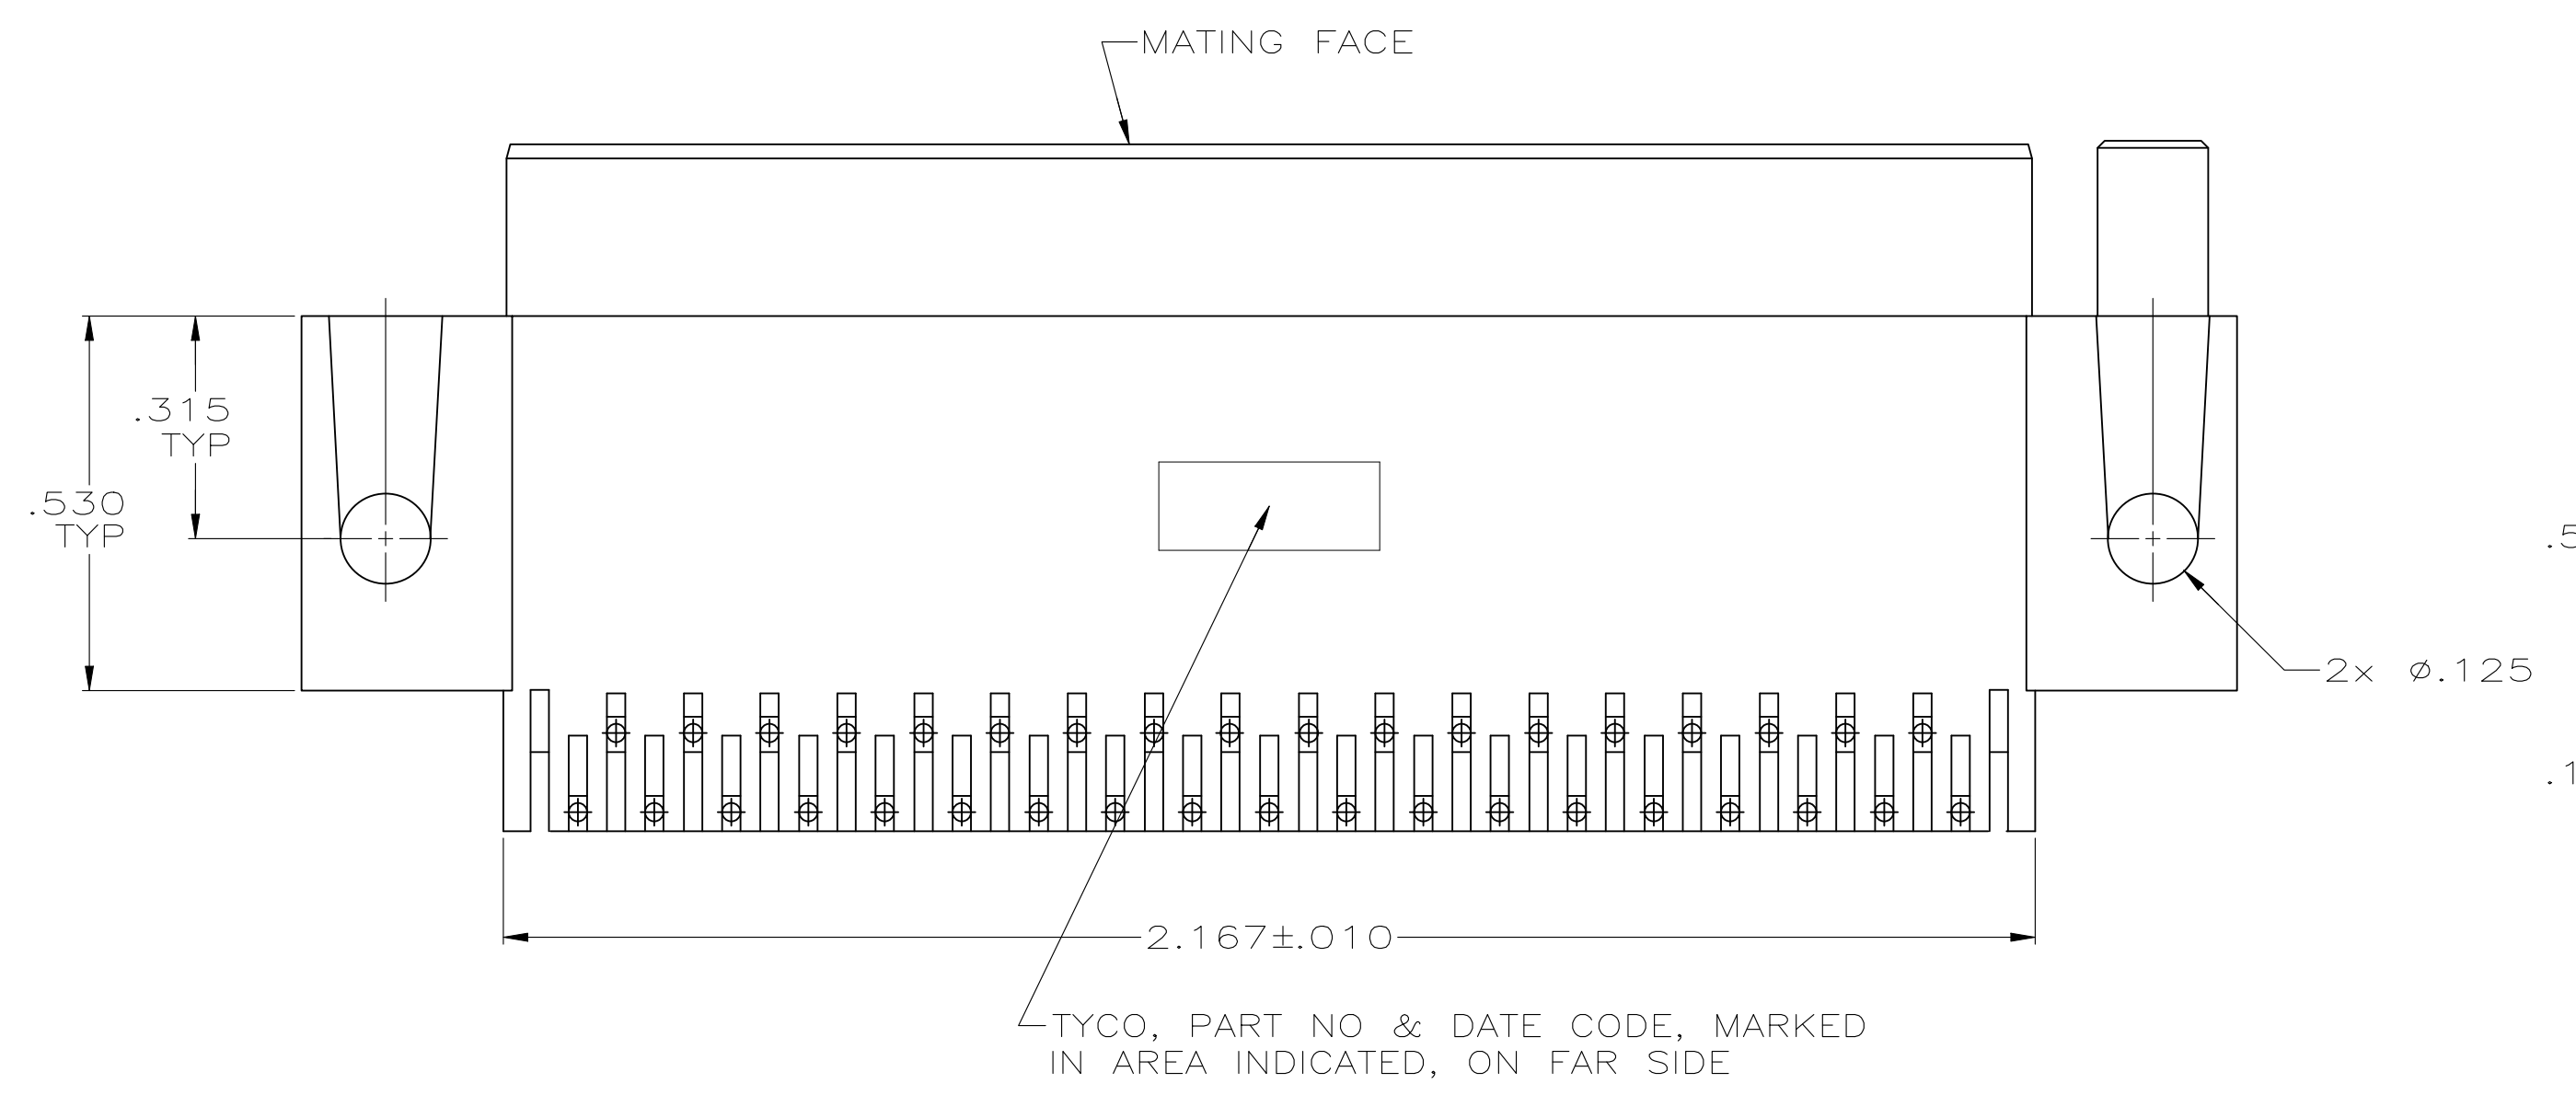

RECOMMENDED P.C. BOARD MOUNTING DIMENSIONS 2

COPYRIGHT 2005
TYCO ELECTRONICS CORP
ALL RIGHTS RESERVED

OBSOLETE	WITH SCREWLOCKS	5747462-6
	WITH INSERTS	5747462-4
	WITH .120 DIA HOLE	5747462-2
REMARKS		PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. PETERS 16SEP05	TE Connectivity	
DIMENSIONS: INCHES		CHK S. BOLASH 16SEP05		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M. WALMSLEY 16SEP05	NAME	
0. PLC ± .005		PRODUCT SPEC		
1. PLC ± .005		108-40025		
2. PLC ± .005		APPLICATION SPEC		
3. PLC ± .005		114-40015		
4. PLC ± .005		SIZE		
ANGLES ± .2°		CAGE CODE		
MATERIAL		DRAWING NO		
FINISH		RESTRICTED TO		
1		0000000		
3		A100779		
CUSTOMER DRAWING		SCALE 4:1 SHEET 1 OF 1 REV A		