
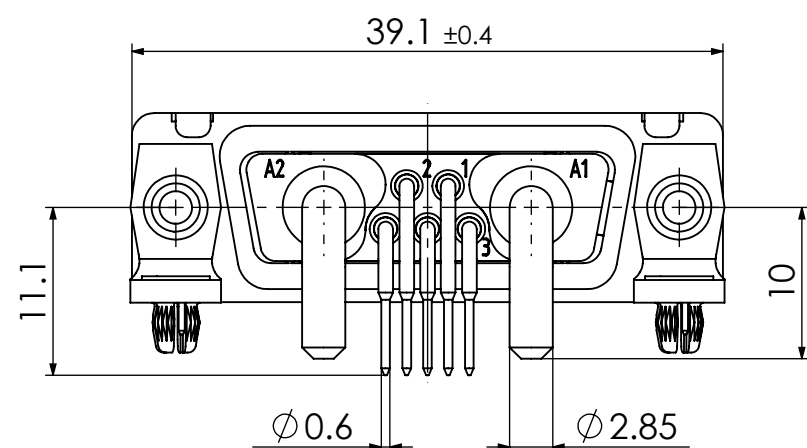
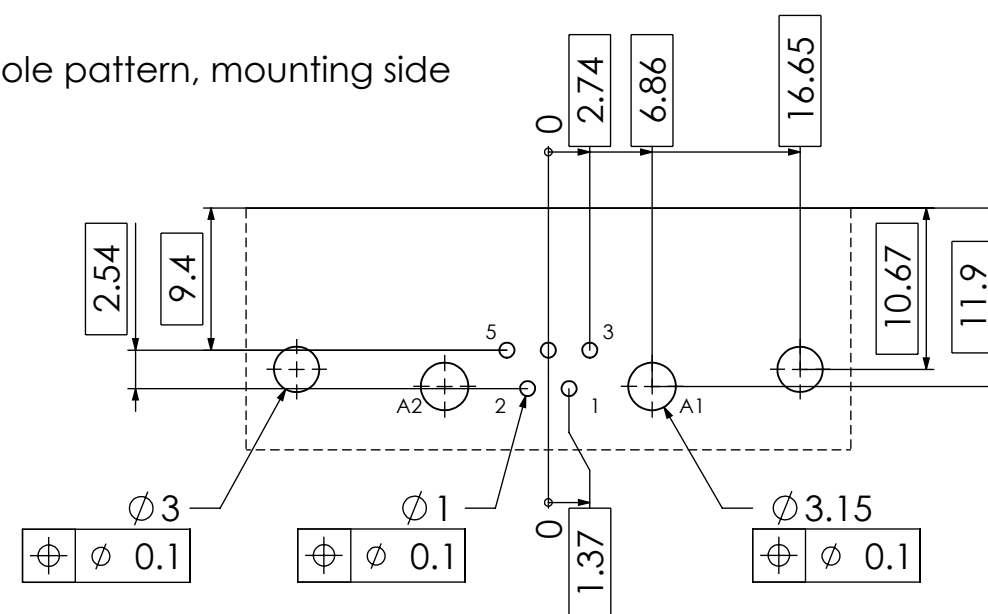
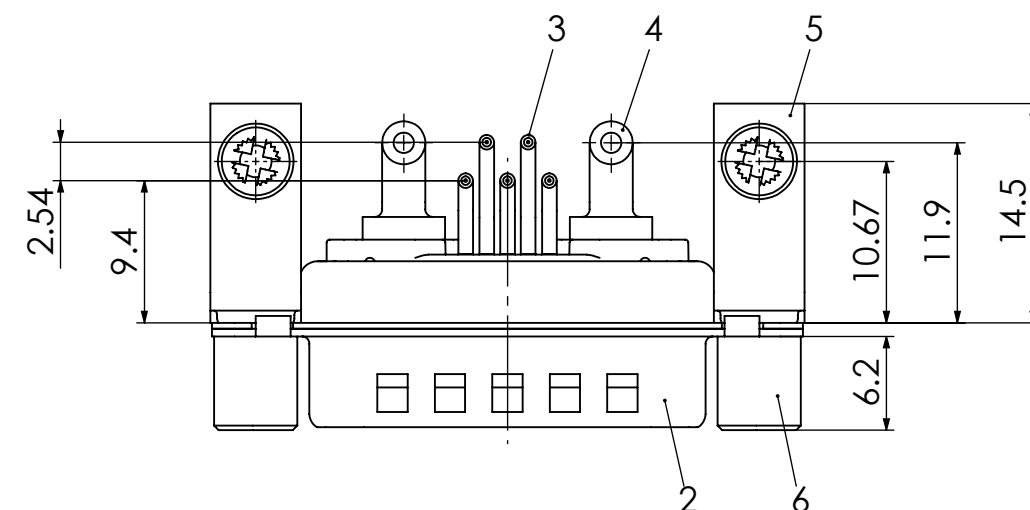
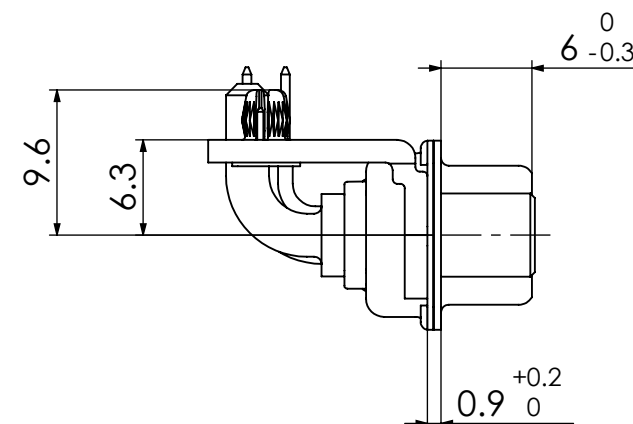


RoHS compliant
by exemption

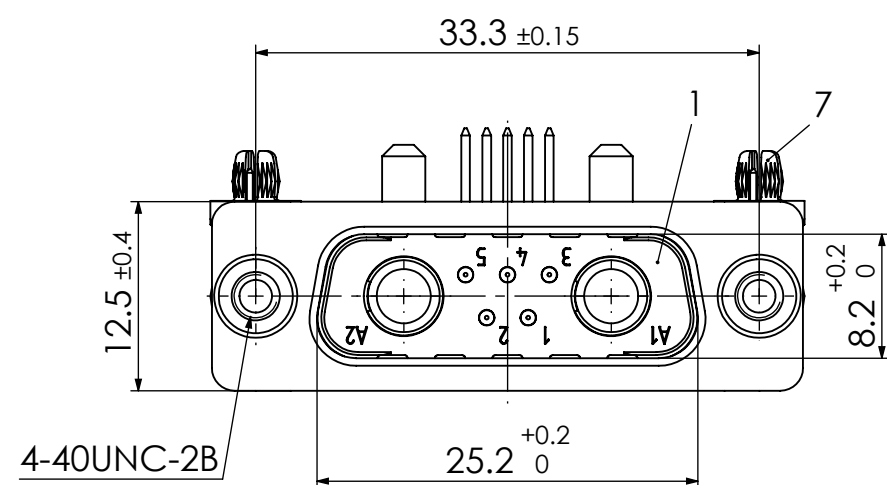

7	2	Snap-in rivet	PCB 1.6mm / Brass	tin plated
6	2	Threaded spacer	MW 4-40 / Steel	tin plated
5	2	Bracket	F1080-29 / Steel	tin plated
4	2	High power contact	FMP180P105R	20A
3	5	Signal contact	P5 / Brass	0.8µm Au
2	1	Shell	Steel	tin plated
1	1	Insulator	PBT (-55°C to +130°C) acc. UL94V-0	green
<i>No.</i>	<i>St.</i>	<i>Part</i>	<i>Type Description/Material</i>	<i>Surface plating/Colour/Class</i>

FUNCTIONAL SYMBOLS F = 0 E = 0 F = 0	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
	DIMENSION UNITS mm		SCALE 2:1		MEASUREMENTS WITHOUT TOLERANCE ACC. TO ISO 2768-m			molex FCT D-Sub Mixed-Layout Connector				
					CURRENT REVISION							
					DRWN: DRAWN BY msteinbrueck 17-08-2023 APPR: APPR BY fvetter 22-08-2023							
	2		24410		INITIAL REVISION			PRODUCT CUSTOMER DRAWING				
	1				DRWN: DRAWN BY sschref 20-01-2010 APPR: APPR BY birgit.rinder 20-01-2010			MATERIAL NUMBER 1731071135			REVISION 2	
	REV.		CH.-NO.									
	REPLACEMENT FOR: 1731071135_Rev. A1				FRIST ANGLE PROJECTION 		DRAWING A3-SIZE		DOCUMENT NUMBER FM7W2P5-4177		CUSTOMER GENERAL MARKET	SHEET NUMBER 1 OF 1

COMMENT:
ALL RIGHTS ARE RESERVED BY US FOR THIS DRAWING. WITHOUT OUR PRIOR CONSENT,
IT MAY NEITHER BE DUPLICATED NOR MADE AVAILABLE TO A THIRD PARTY.
AND IT ALSO MAY NOT BE IMPROPERLY USED BY TE RECEIVER, OR A THIRD PARTY.