

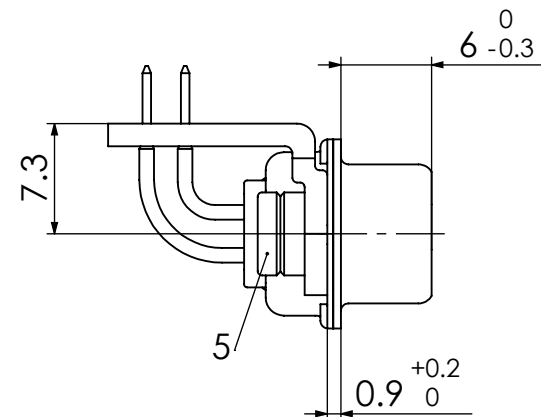
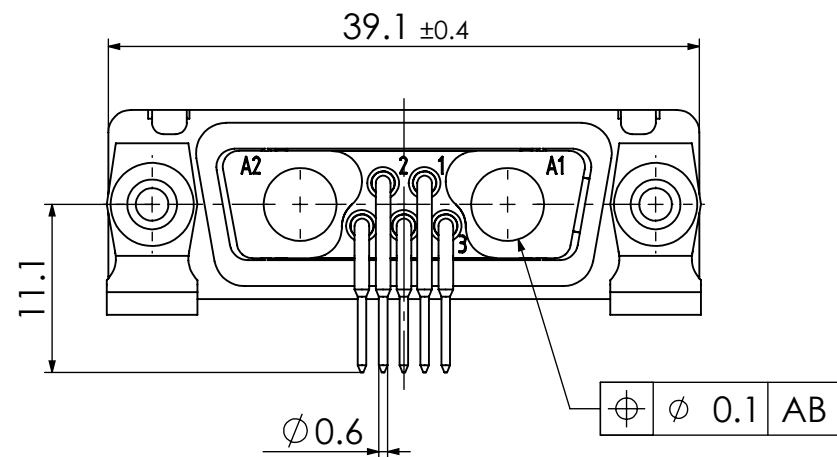
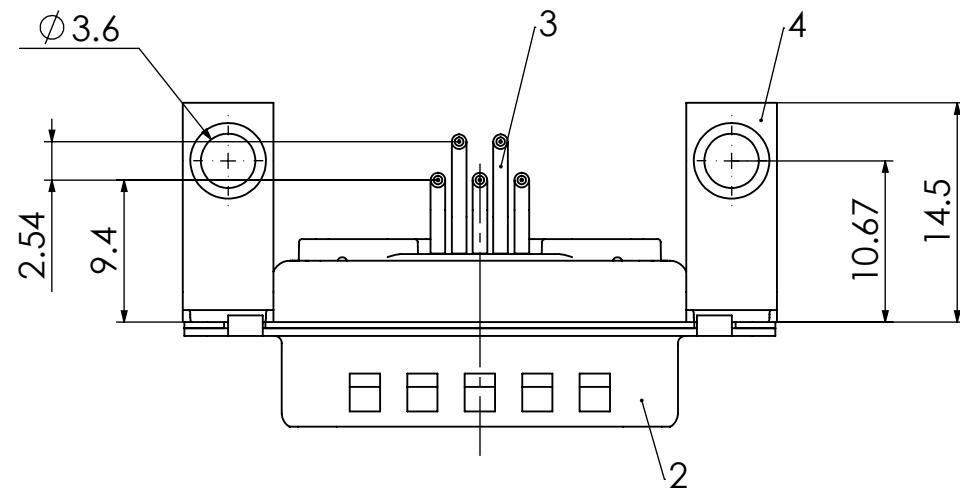


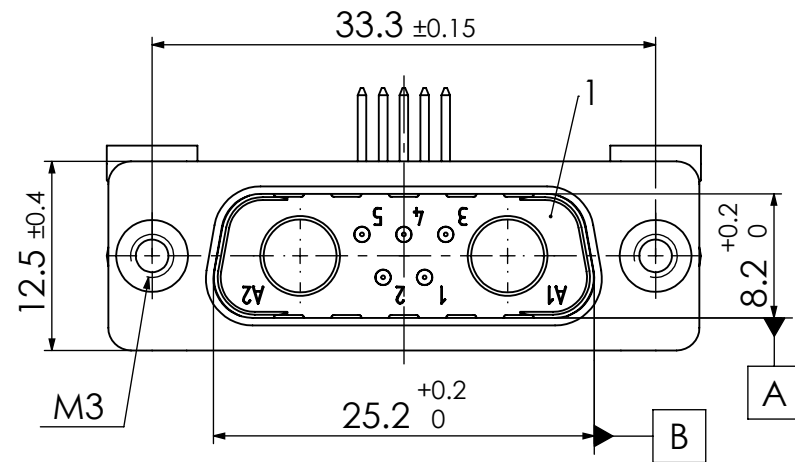

PCB hole pattern, mounting side

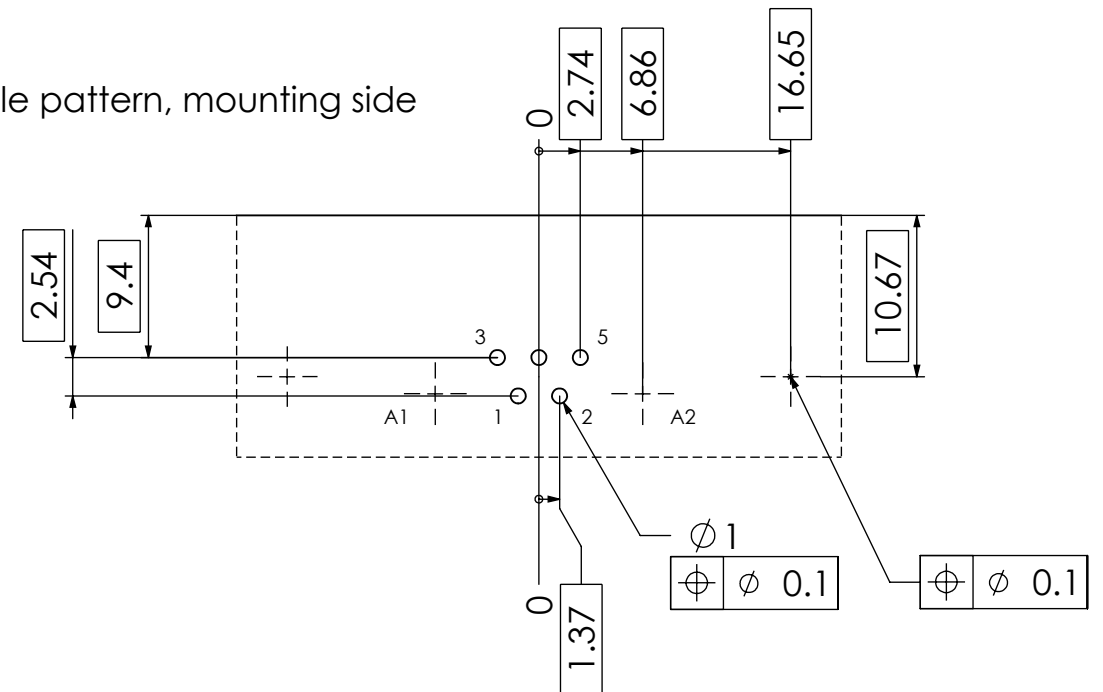

5	2	Clinch nut	MW M3 / Steel	tin plated
4	2	Bracket	F1080-13B / Steel	tin plated
3	5	Signal contact	P5 / Brass	0.8µm Au
2	1	Shell	Steel	tin plated
1	1	Insulator	PBT (-55°C to +130°C) acc. UL94V-0	green
<i>No.</i>	<i>St.</i>	<i>Part</i>	<i>Type Description/Material</i>	<i>Surface plating/Colour/Class</i>

FUNCTIONAL SYMBOLS 	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													
	DIMENSION UNITS		SCALE		MEASUREMENTS WITHOUT TOLERANCE ACC. TO ISO 2768-m				molex					
	mm		2:1											
			CURRENT REVISION											
			DRWN: DRAWN BY msteinbrueck 24-08-2023											
					APPR: APPR BY fvetter 25-08-2023				FCT D-Sub Mixed-Layout Connector					
	2		24410		INITIAL REVISION				PRODUCT CUSTOMER DRAWING					
1				DRWN: DRAWN BY MJobst 15-03-2007				MATERIAL NUMBER				REVISION		
REV.		CH.-NO.		APPR: APPR BY sschref 16-03-2007				1731071129				2		
REPLACEMENT FOR: 1731071129_Rev. A1				FRIST ANGLE PROJECTION		DRAWING		DOCUMENT NUMBER				CUSTOMER		SHEET NUMBER
						A3-SIZE		FM7W2P5-1568				GENERAL MARKET		1 OF 1

COMMENT:
ALL RIGHTS ARE RESERVED BY US FOR THIS DRAWING. WITHOUT OUR PRIOR CONSENT,
IT MAY NEITHER BE DUPLICATED NOR MADE AVAILABLE TO A THIRD PARTY,
AND IT ALSO MAY NOT BE IMPROPERLY USED BY TE RECEIVER, OR A THIRD PARTY.