

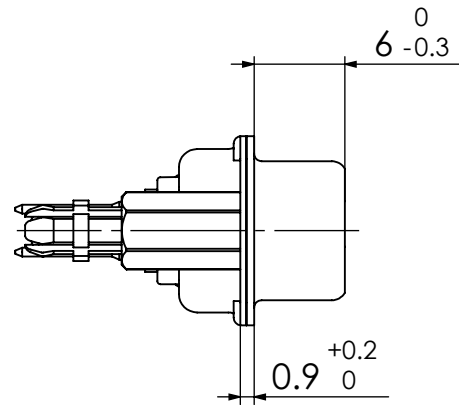
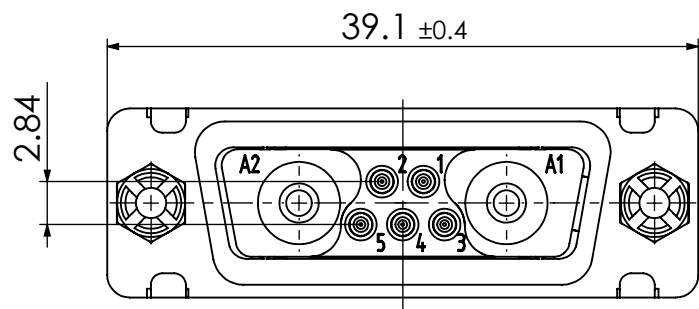
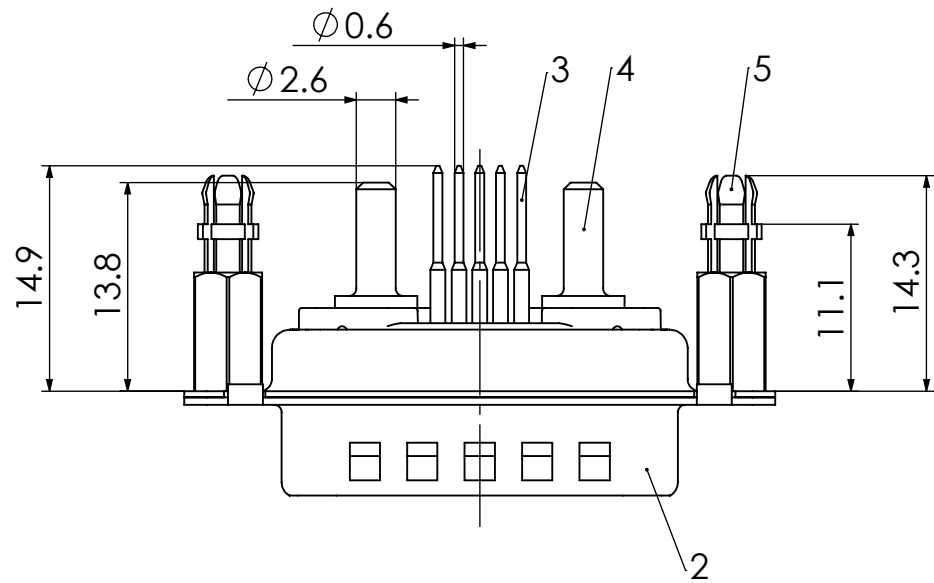


COMMENT:
ALL RIGHTS ARE RESERVED BY US FOR THIS DRAWING. WITHOUT OUR PRIOR CONSENT,
IT MAY NEITHER BE DUPLICATED NOR MADE AVAILABLE TO A THIRD PARTY.
AND IT ALSO MAY NOT BE IMPROPERLY USED BY THE RECEIVER, OR A THIRD PARTY.

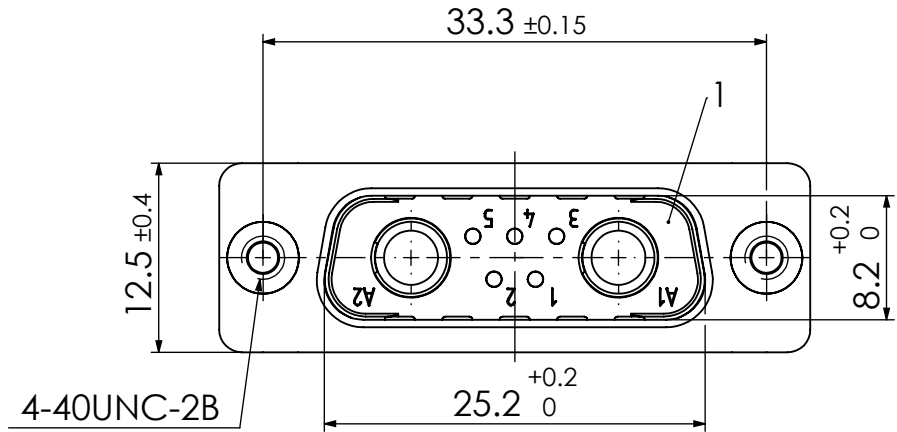

PCB hole pattern, mounting side

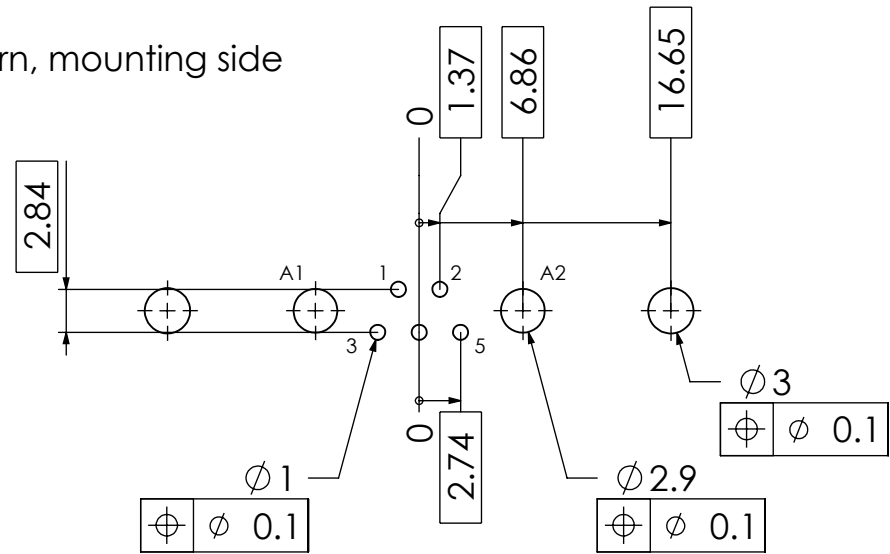

5	2	Snap-in bolt	PCB 1.6mm / Brass	tin plated
4	2	High power contact	FMP048P104	20A
3	5	Signal contact	P26 / Brass	0.1µm Au
2	1	Shell	Steel	tin plated
1	1	Insulator	PBT (-55°C to +130°C) acc. UL94V-0	green
No.	St.	Part	Type Description/Material	Surface plating/Colour/Class

FUNCTIONAL SYMBOLS ▽ = 0 ▽ = 0 ▽ = 0	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
	DIMENSION UNITS mm		SCALE 2:1	MEASUREMENTS WITHOUT TOLERANCE ACC. TO ISO 2768-m				molex FCT D-Sub Mixed-Layout Connector				
				CURRENT REVISION								
				DRWN: DRAWN BY msteinbrueck 05-09-2023				PRODUCT CUSTOMER DRAWING				
				APPR: APPR BY mteubel 15-09-2023								
2		24410	INITIAL REVISION									
1			DRWN: DRAWN BY mpostulka 14-10-2009				MATERIAL NUMBER 1731071121			REVISION 2		
REV.	CH.-NO.	APPR: APPR BY Markus.Jobst 14-10-2009										
REPLACEMENT FOR: 1731071121_Rev. A1			FIRST ANGLE PROJECTION 		DRAWING A3-SIZE		DOCUMENT NUMBER FM7W2P26-0656			CUSTOMER GENERAL MARKET		SHEET NUMBER 1 OF 1