
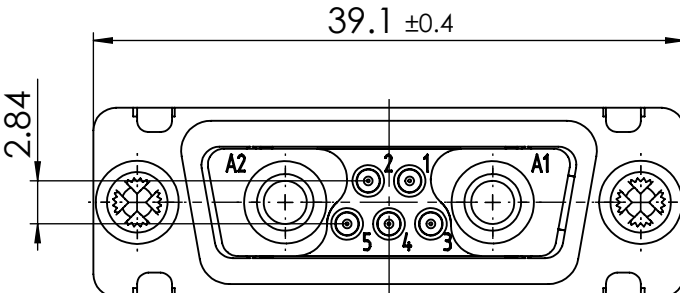
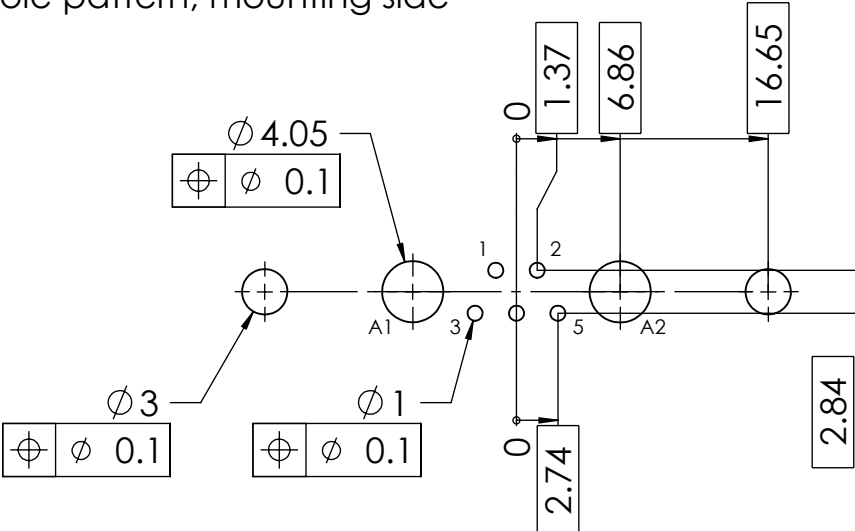
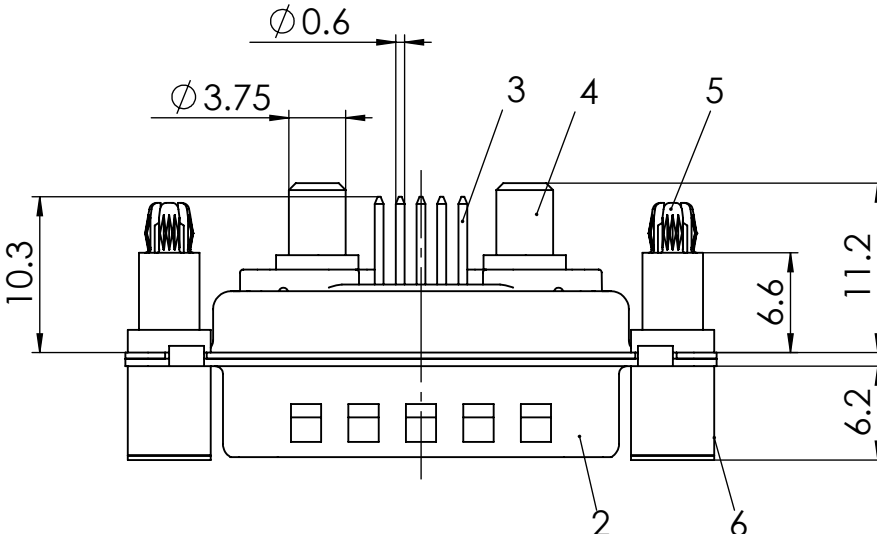
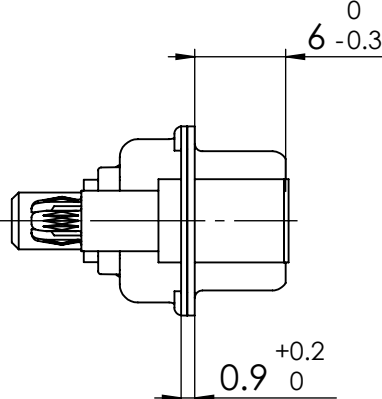


RoHS compliant by exemption

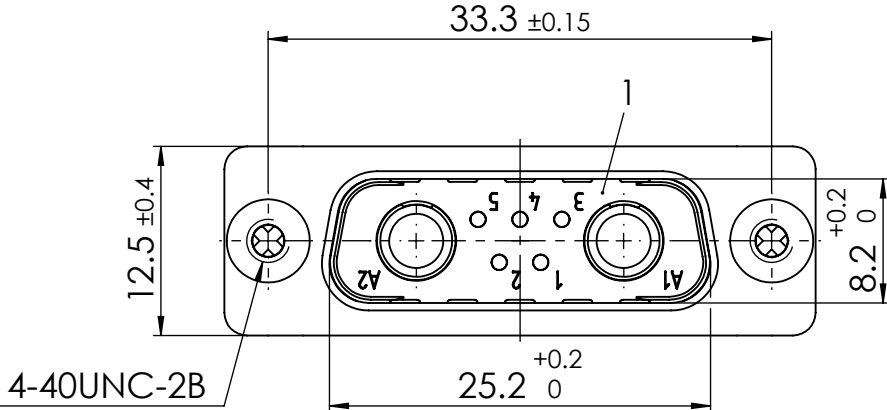

6	2	Support sleeve	Brass	tin plated
5	2	Snap-in bolt	PCB 1.6mm / Brass	tin plated
4	2	High power contact	FMP016P104	40A
3	5	Signal contact	P1 / Brass	0.8µm Au
2	1	Shell	Steel	tin plated
1	1	Insulator	PBT (-55°C to +130°C) acc. UL94V-0	green
<i>No.</i>	<i>St.</i>	<i>Part</i>	<i>Type Description/Material</i>	<i>Surface plating/Colour/Class</i>

FUNCTIONAL SYMBOLS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													
 = 0		DIMENSION UNITS mm		SCALE 2:1		MEASUREMENTS WITHOUT TOLERANCE ACC. TO ISO 2768-m				molex FCT D-Sub Mixed-Layout Connector					
 = 0						CURRENT REVISION									
 = 0						DRWN: DRAWN BY sschref 11-11-2005									
						APPR: APPR BY sschref 11-11-2005									
						INITIAL REVISION				PRODUCT CUSTOMER DRAWING					
		2		24410		DRWN: DRAWN BY ADenzinger 10-11-2005				MATERIAL NUMBER					
		1				APPR: APPR BY sschref 11-11-2005				REVISION					
		REV.		CH.-NO.						1731071394					
		REPLACEMENT FOR: 1731071394_Rev. A1				FIRST ANGLE PROJECTION 		DRAWING A3-SIZE		DOCUMENT NUMBER FM7W2P1-2395			CUSTOMER GENERAL MARKET		SHEET NUMBER 1 OF 1

COMMENT:
ALL RIGHTS ARE RESERVED BY US FOR THIS DRAWING. WITHOUT OUR PRIOR CONSENT,
IT MAY NEITHER BE DUBICATED NOR MADE AVAILABLE TO A THIRD PARTY,
AND IT ALSO MAY NOT BE IMPROPERLY USED BY TE RECEIVER, OR A THIRD PARTY.