

4




3

2

1

REVISION

ZONE	LTR	ECN	DESCRIPTION	DATE	APPROVED
	B	39375	REVISE AND REDRAWN.	7/1/78	Se

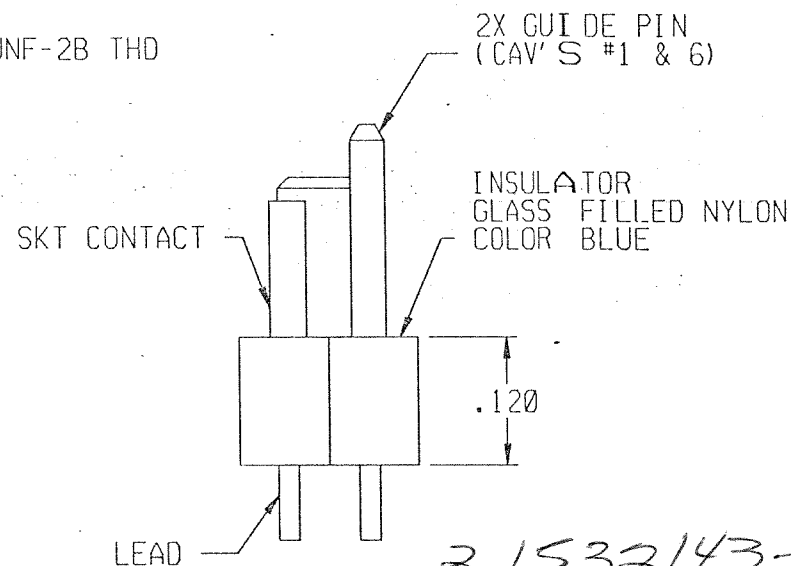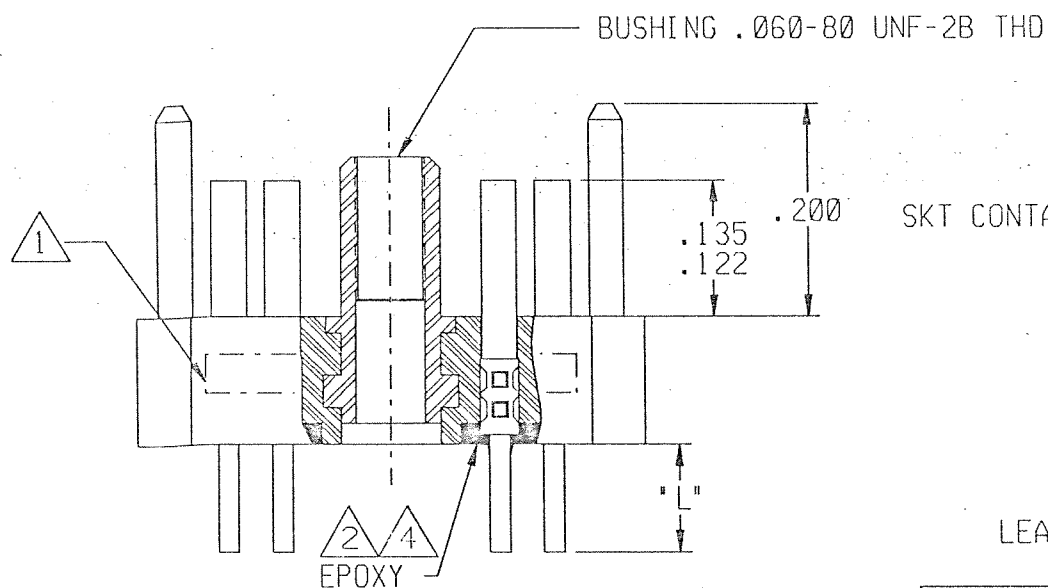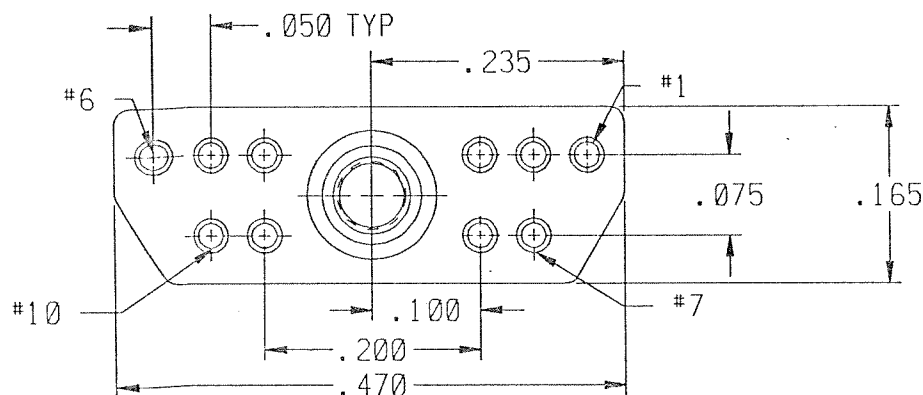

NOTES: UNLESS OTHERWISE SPECIFIED

1. MARK PER TIS.

2. EPOXY AS SHOWN WITH P/N: 194-8102-6215/6225.

3. CRIMP LEADS INTO CONTACTS PER MEP 302-05.

4. EPOXY WICKING: UNINSULATED WIRES - .050 MAX

INSULATED WIRE UP TO #25 AWG - .125 MAX

INSULATED WIRE #24 AWG OR LARGER - .200 MAX

UNLESS OTHERWISE SPECIFIED DIMENSIONS
ARE IN INCHES. TOLERANCE ARE:

FRACTIONS	DECIMALS	ANGLES
$\pm 1/8$	.XX $\pm .01$	$\pm 2^\circ$
	.XXX $\pm .005$	

MATERIAL:

FINISH:

APPROVALS

SIGNATURE DATE

DRAWN BY: *Tom K.* 9/1/79P.E. *Se* 9/1/79

M.E.

D.A.



MICRODOT CONNECTORS
A DIVISION OF UNI-STAR INDUSTRIES INC.
306 PASADENA AVE., SO. PASADENA, CA 91030

JACKMATE CONNECTOR
MCJB2-10S

PROD
CODE
834
CODE
M

SIZE CODE IDENT NO. DRAWING NO.
A 98278 095-0000-0133

SCALE: NONE SHEET 1 OF 1