




3M™ D-SUB EMI JUNCTION SHELL
METALIZED PLASTIC

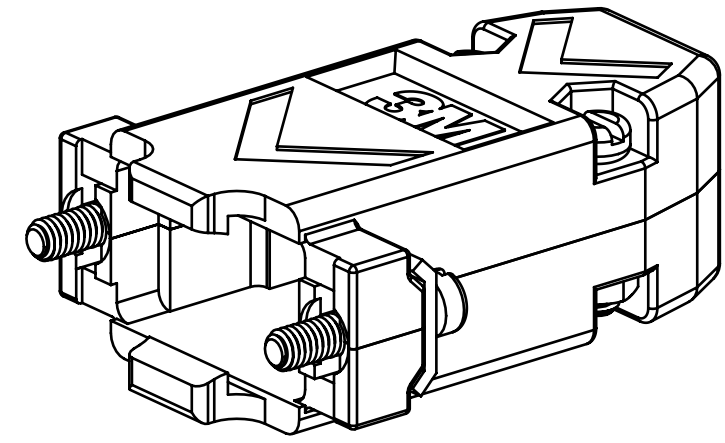


3357-6209-1C

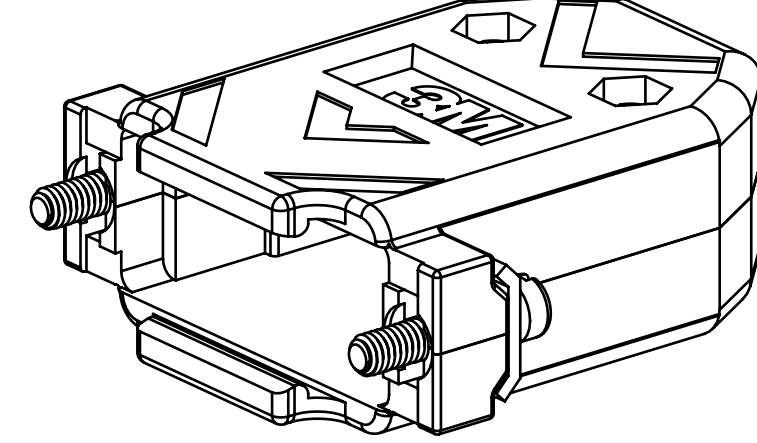


3357-6215-10

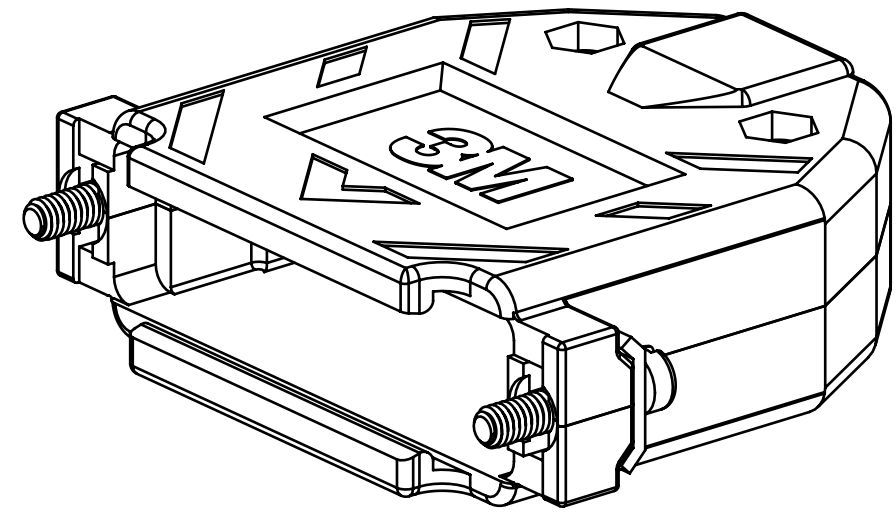

3357-6225-1C

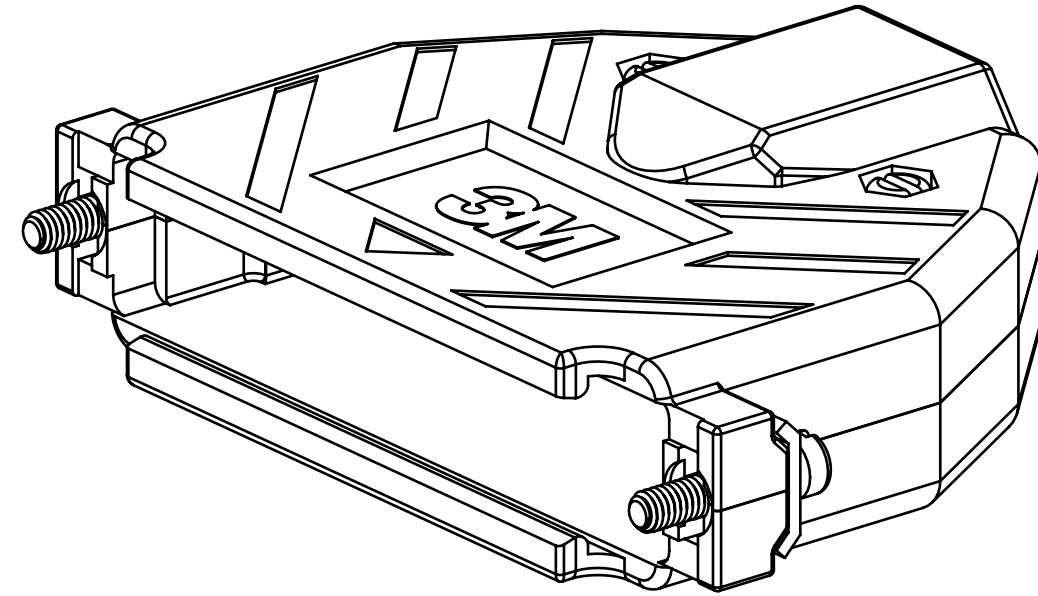

3357-6237-10

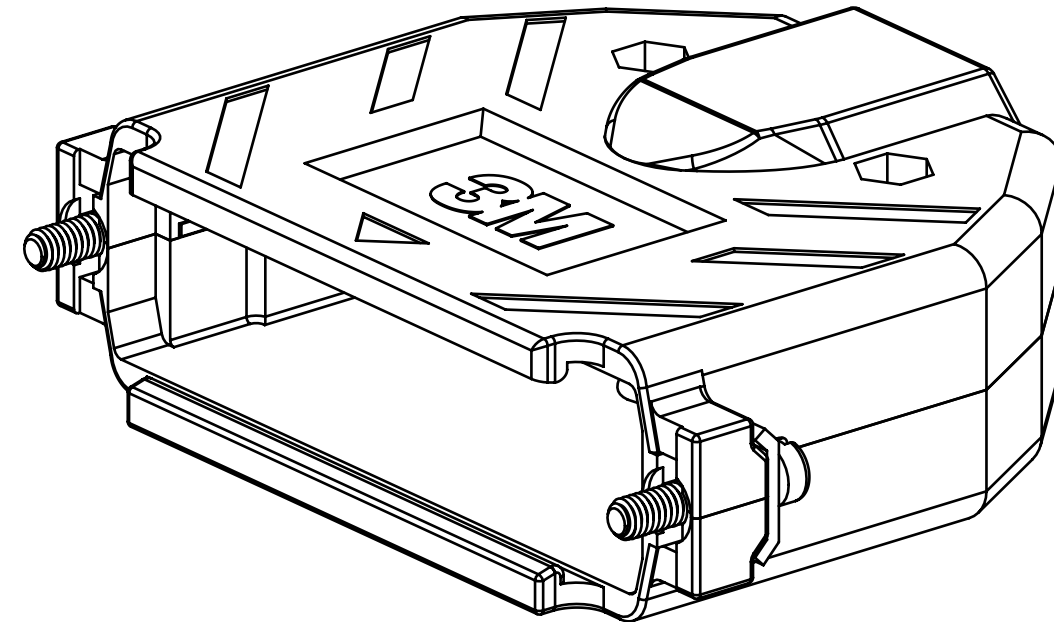

3357-6250-1C

- * PROTECTION FROM EMI/ESD.
- * EASY ASSEMBLY REDUCES TIME AND LABOR FOR LOW COST
- * LIGHT WEIGHT AND A COMPACT DESIGN.
- * STRAIN RELIEF COMPENSATES FOR MULTIPLE CABLE DIAMETERS.
- * JACKSCREWS PROVIDE POSITIVE RETENTION.



1. REGULATORY INFORMATION:
VISIT 3M.com/regs
2. COMPRESSION INSERTS CANNOT
BE ORDERED SEPARATELY.
3. USE APPLICABLE JACKSCREW
OR JACKSOCKET KIT MOUNTING
HARDWARE.
4. DIMENSIONS CAN VARY DEPENDING
UPON THE COMPRESSIBILITY OF
THE WIRE.

-
- #4-40 X 7/16" LG FILLISTER HEAD MACHINE SCREW
MATERIAL: STEEL
FINISH: BRIGHT ZINC
(HEXAVALENT CHROMIUM FREE)
QTY: 2 EACH POSITION
- #4-40, #2 BLACK HEX NUT
MATERIAL: STEEL
FINISH: BRIGHT ZINC
(HEXAVALENT CHROMIUM FREE)
QTY: 2 EACH POSITION
- #4-40 X 7/16" LG FILLISTER HEAD CAPTIVE SCREW
MATERIAL: STEEL
FINISH: BRIGHT ZINC
(HEXAVALENT CHROMIUM FREE)
QTY: 2 EACH POSITION
- #4 SADDLE WASHER
MATERIAL: STEEL
FINISH: BRIGHT ZINC
(HEXAVALENT CHROMIUM FREE)
QTY: 2 EACH POSITION

ORDERING INFORMATION
3357-62XX-1C


- BACKSHELL SIZE
- | | | |
|----|---|--------|
| 09 | = | 9 PIN |
| 15 | = | 15 PIN |
| 25 | = | 25 PIN |
| 37 | = | 37 PIN |
| 50 | = | 50 PIN |

PHYSICAL :


- SHELL : ABS, UL94HB
SHELL PLATING : NICKEL
COMPRESSION INSERT :
MATERIAL : THERMOPLASTIC
COLOR : BLACK, UL94V-0
DUROMETER : 75±5

ENVIRONMENTAL :

- TEMPERATURE RATING: 0° C TO +75° C

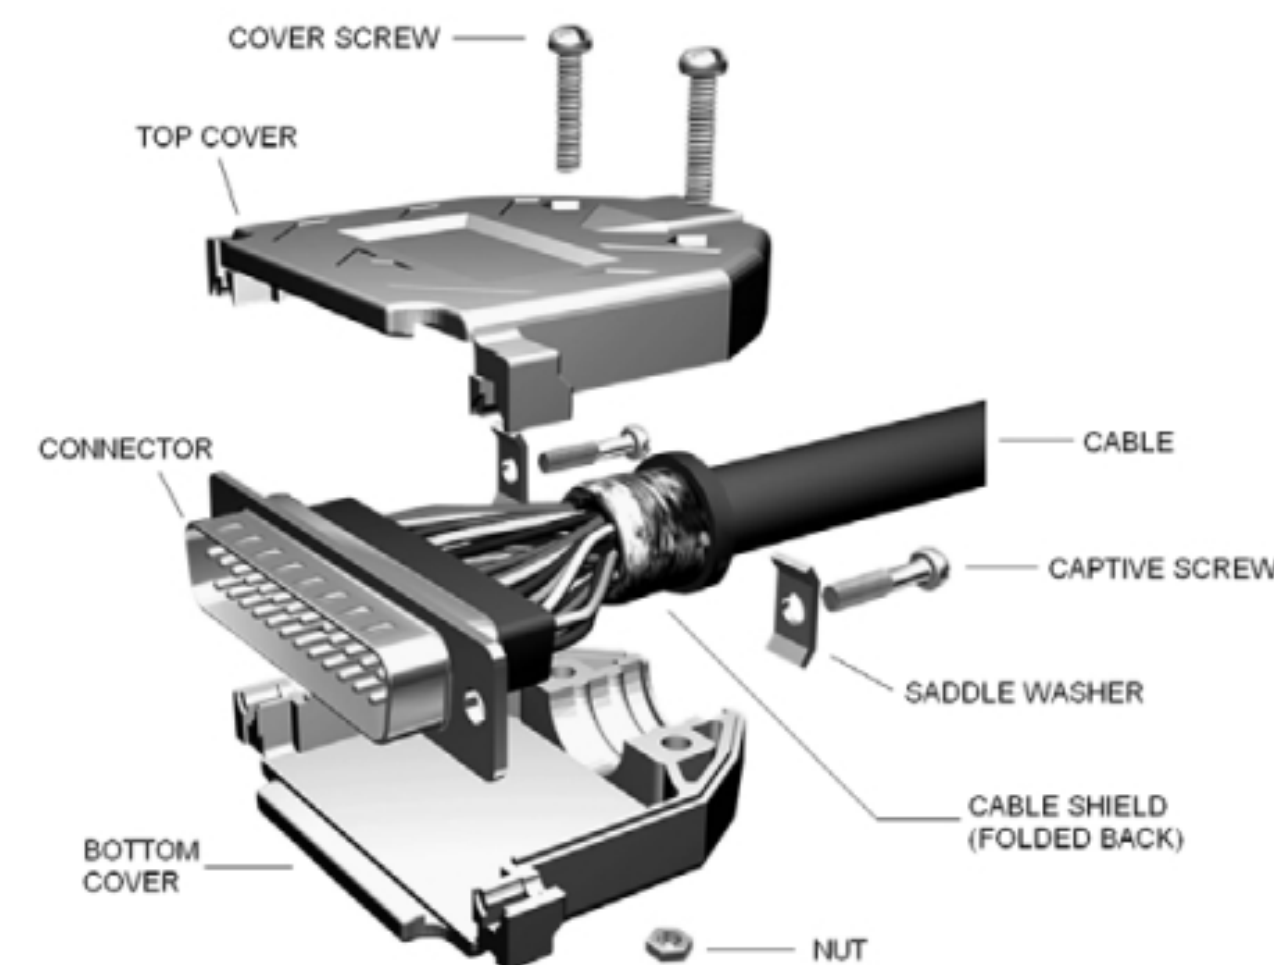


DIMENSIONS: INCHES [MM]
[MM] IS FOR REF. ONLY

DESIGN REFERENCE		NEXT ASSEMBLY		REV. ECO		ISSUE DATE AND DESCRIPTION		DRFT		CHKD	
ADDRESS CODES				DRFT CASTIGLIONE		DATE SEP 26, 2024		INFO MFO		DATE	
				CHKD		DATE		APPROV. F. RODRIGUEZ		DATE SEP 26, 2024	
DIVISION				DIVISION CODE EMSD				© 3M COPYRIGHT 2025			
DO NOT SCALE DRAWING		SCALE		TOLERANCES EXCEPT AS NOTED		 3M Center St. Paul, MN 55144		This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.			
				INCHES .0 .00 .000 .0000 ±		TITLE		D-SUB 961 JUNCTION SHELL, METALIZED PLASTIC			
THIRD ANGLE PROJECTION				MILLIMETERS 0 .0 .00 .000 ±		CAGE NUMBER					
INTERPRET PER ASME Y14.5 - 2018				MAX. SURFACE ROUGHNESS 		SIZE		DRAWING NO.			
☒ MAX. SURFACES ☐ MAX. SURFACES ☒ MARKED ONLY				ANGLES 0 30 45 60 90 120 135 150 180		D78-5100-2132-8		REV. C			
				MODEL		3357		DET.		LISTS ☐ YES ☒ NO	
								SHT 1		OF 4	


3M™ Display and Electronics Product Platform, (DEPP)
Transportation and Electronics Business Group (TEBG)
<http://www.3M.com/interconnect>

3M IS A TRADEMARK OF 3M COMPANY.
FOR TECHNICAL, SALES OR ORDERING
INFORMATION CALL 800-225-5373


3M™ D-SUB EMI JUNCTION SHELL
METALIZED PLASTIC

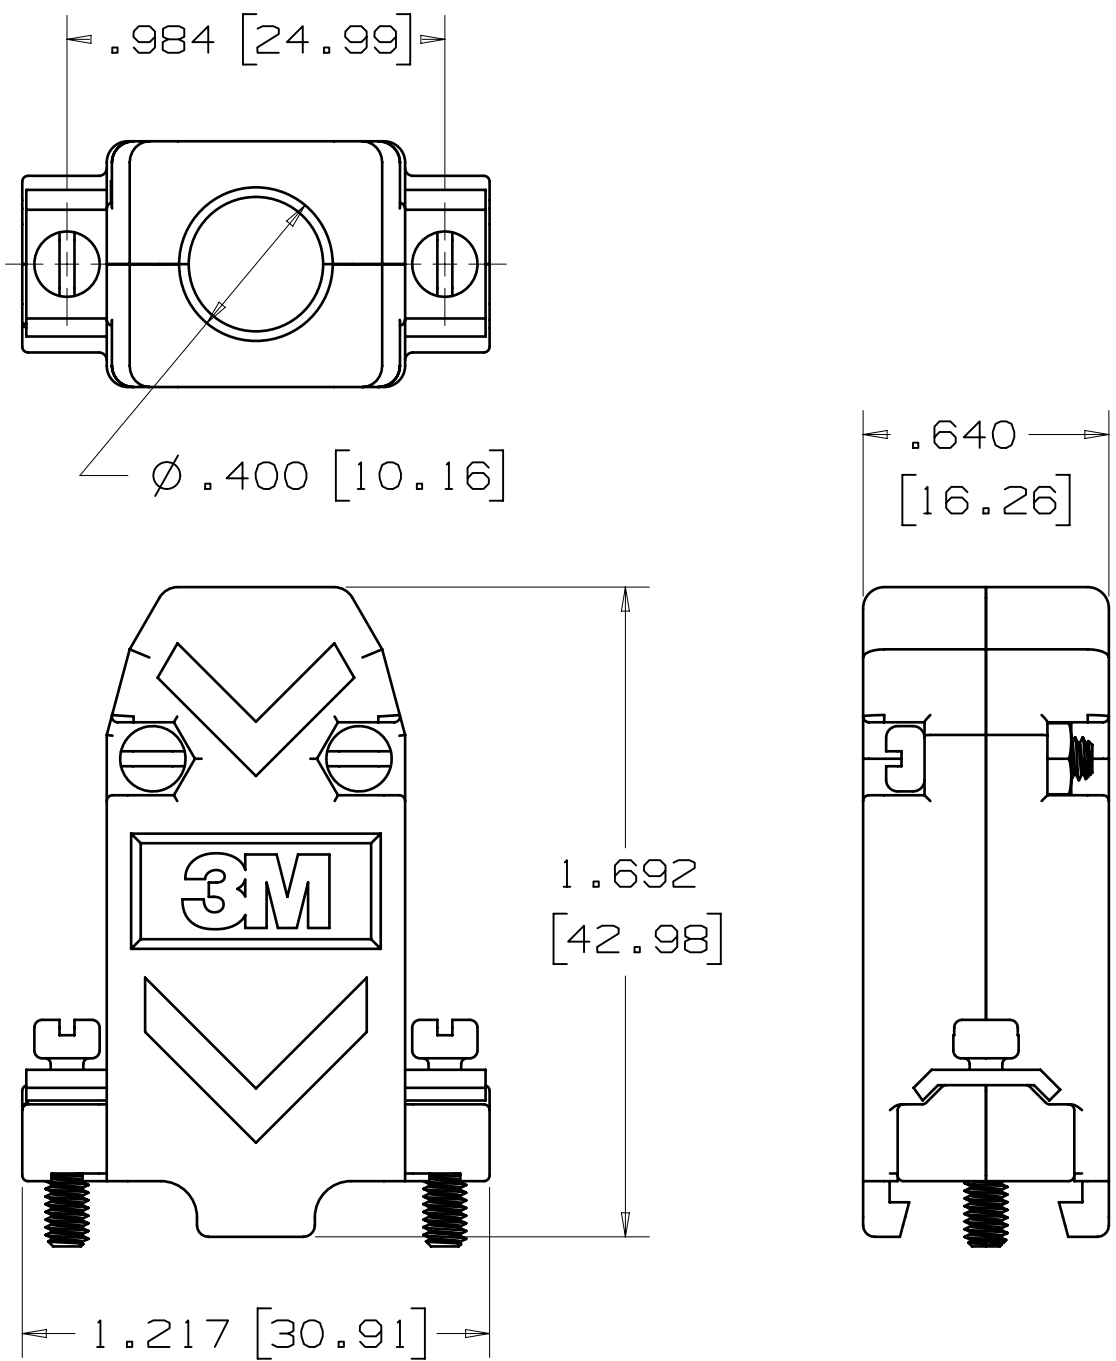


3357-6209-1C

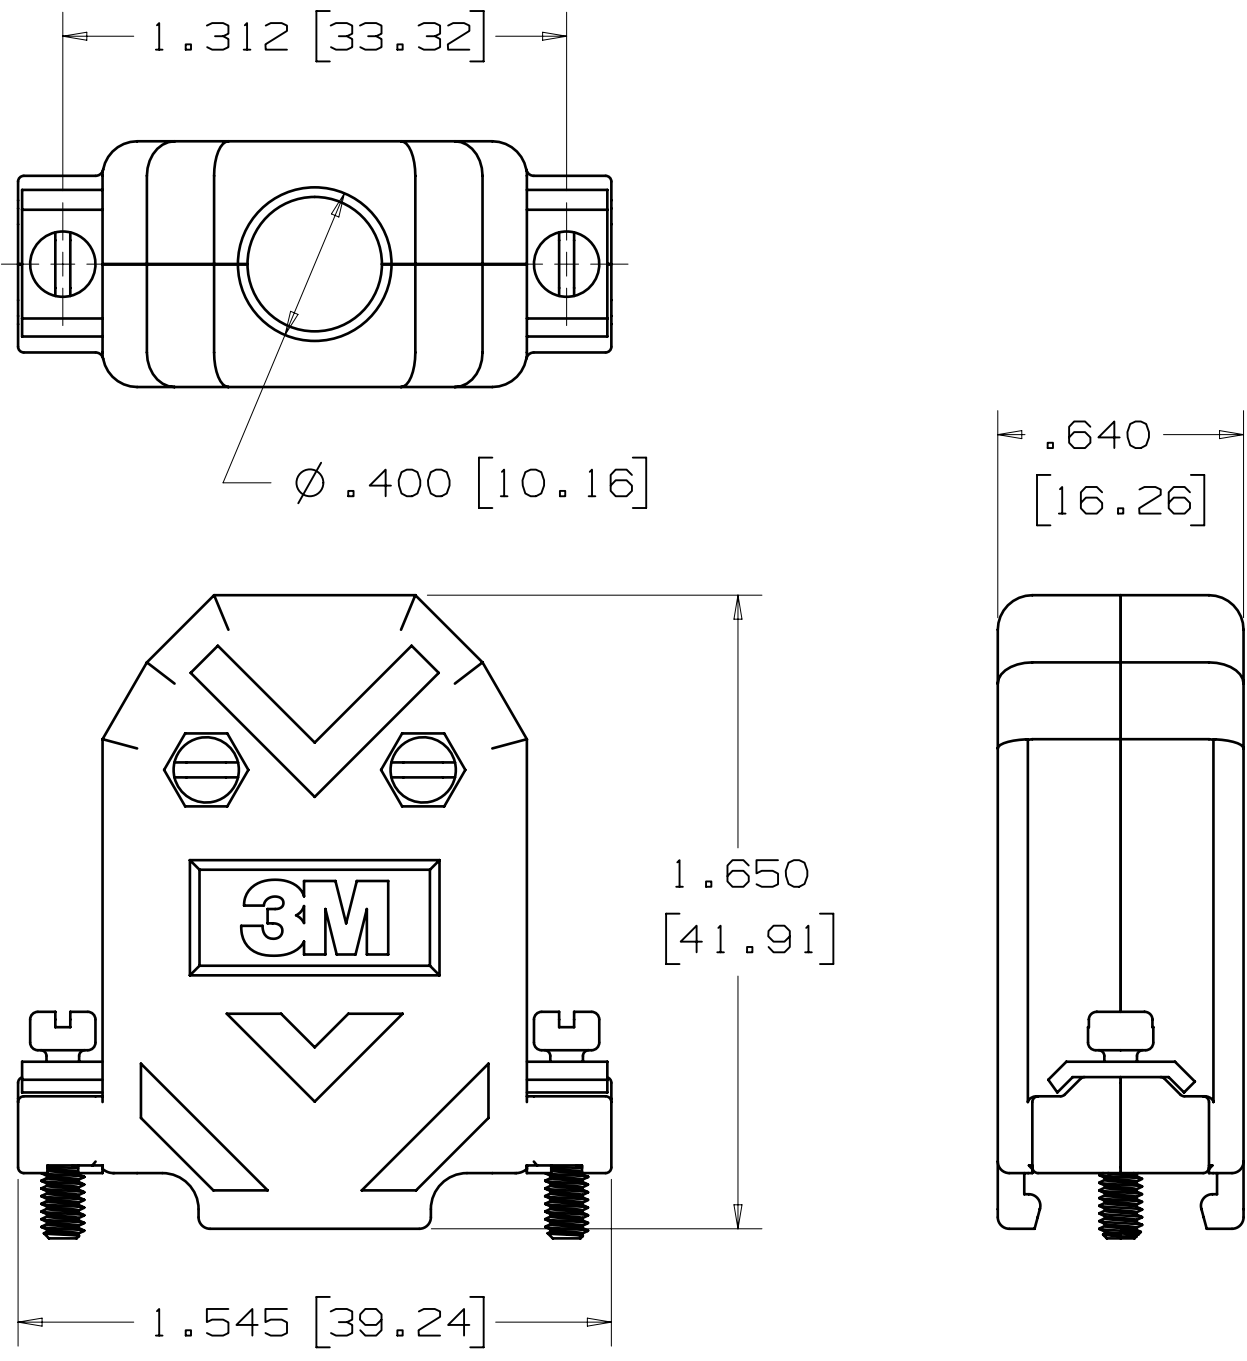


3357-6215-1C

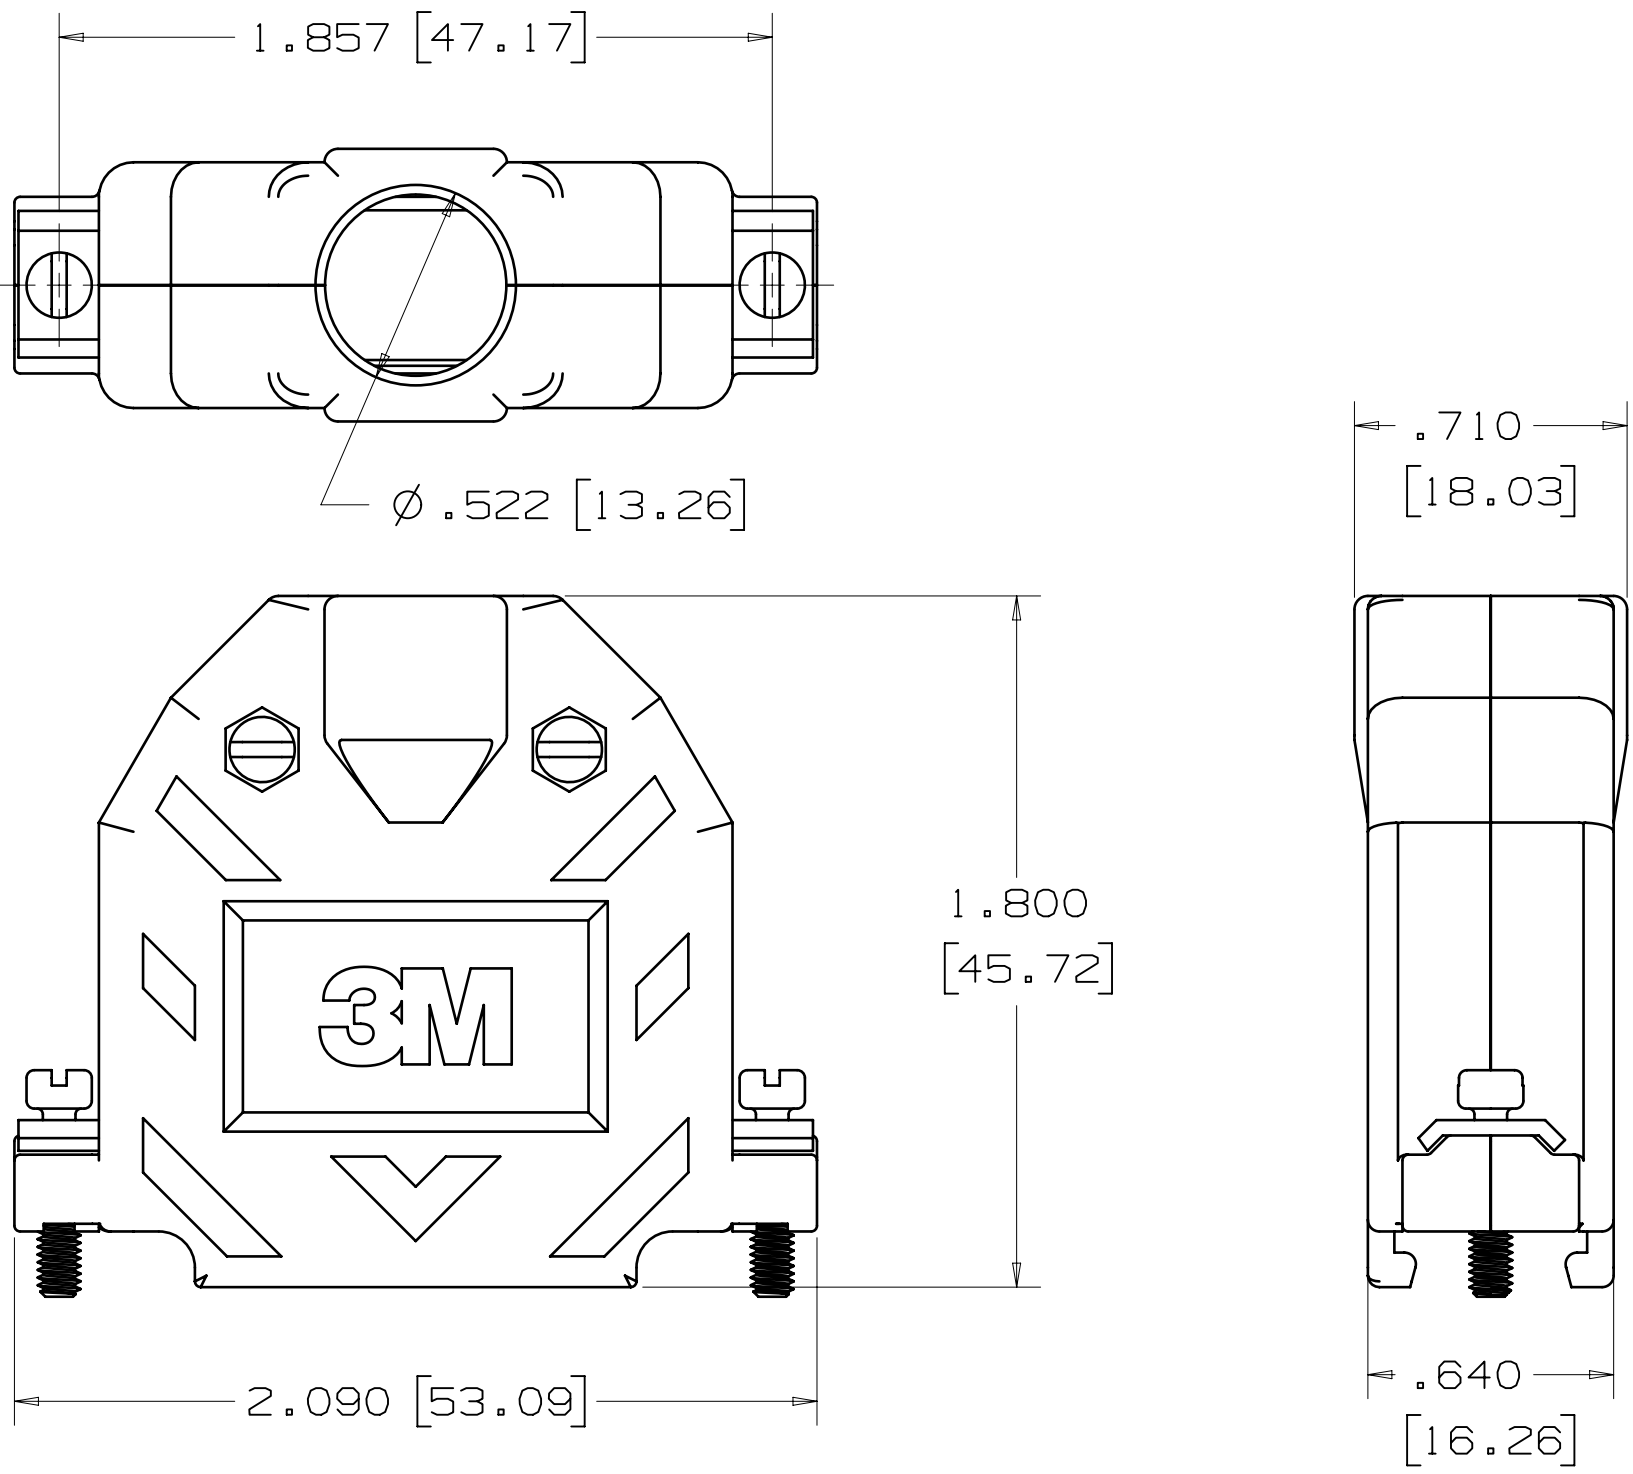

3357-6225-1C

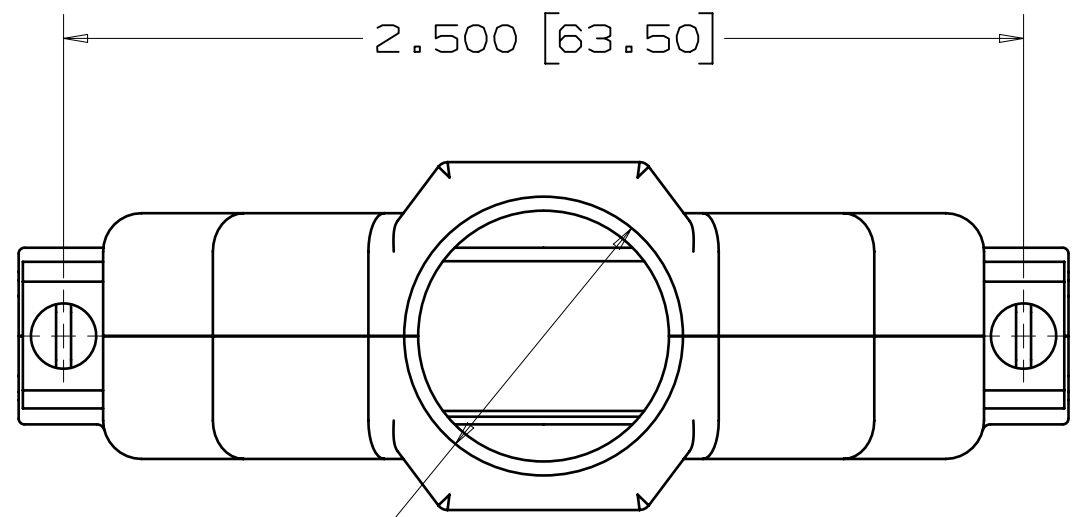

3357-6237-1C

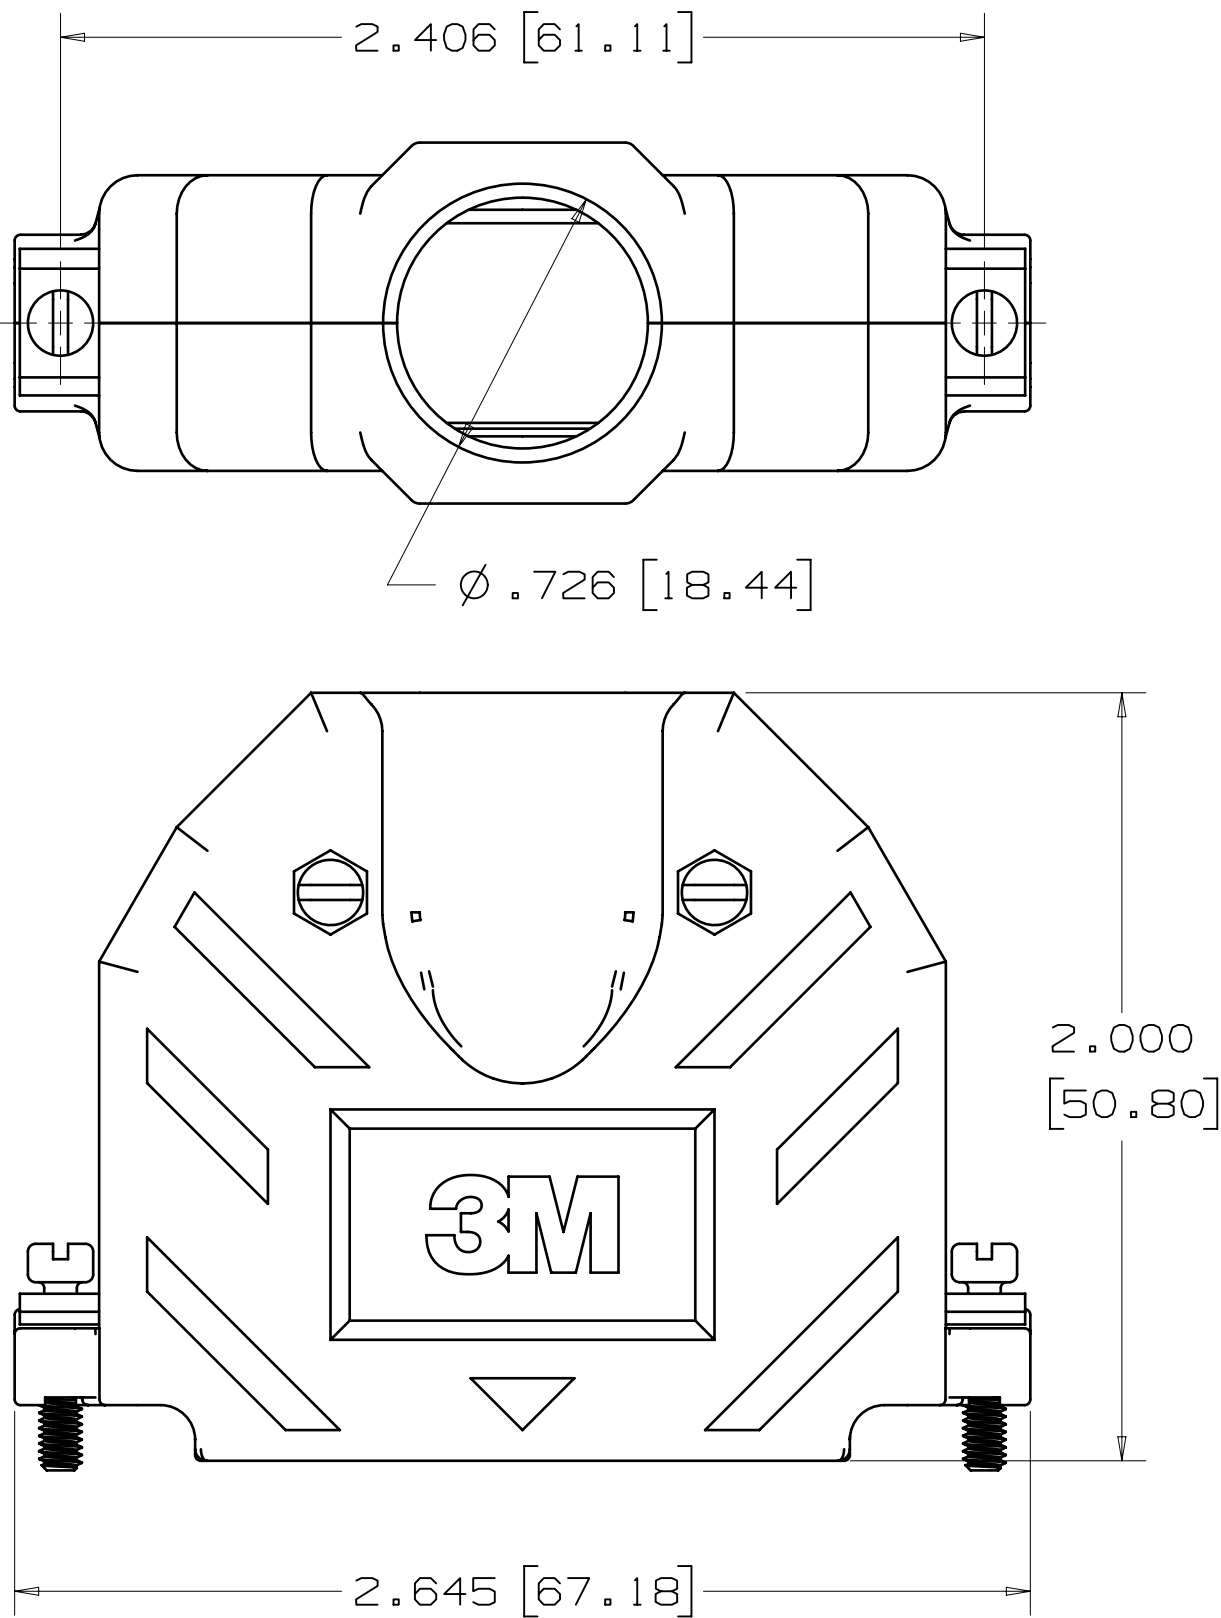

3357-6250-1C

3M PART No.	CABLE O.D. RANGE	
	MIN.	MAX.*
3357-6209-1C	.19 [4.8]	.35 [8.9]
3357-6215-1C	.19 [4.8]	.35 [8.9]
3357-6225-1C	.19 [4.8]	.46 [11.7]
3357-6237-1C	.30 [7.6]	.68 [17.27]
3357-6250-1C	.30 [7.6]	.84 [21.34]

INCH [MM]
TOLERANCE FOR SHELLS ONLY
INCH ±.015
[] = DIM. FOR REFERENCE ONLY


DESIGN REFERENCE	NEXT ASSEMBLY
REV. ECO	ISSUE DATE AND DESCRIPTION
CHG. CASTIGLIONE	DATE SEP 26, 2024
CHG. F. RODRIGUEZ	DATE SEP 26, 2024
DIVISION	DIVISION CODE
DO NOT SCALE DRAWING	EMSD
THIRD ANGLE PROJECTION	TOLERANCES EXCEPT AS NOTED
MAX SURFACE ROUGHNESS	INCHES
MARKED ONLY	MILLIMETERS

C	123948	JUN 11, 2025		JNC	FJR
		REVISE AND REDRAWN			
B	118894	SEP 30, 2024		JNC	FJR
		REVISE TOLERANCE & REDRAWN			
A	AT2177	SEP 26, 2024		--	--
		MIGRATED FROM ANOTHER DATABASE			
REV	ECO	ISSUE DATE AND DESCRIPTION		DRFT	CHKD
DEPT	CASTILGIONE	DATE	MPG	DATE	
CHGD		DATE	APPROV	DATE	
		F. RODRIGUEZ		SEP 26, 2024	
		© 3M COPYRIGHT 2025			
3M Center St. Paul, MN 55144		This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.			
TITLE					
D-SUB EMI JUNCTION SHELL, METALIZED PLASTIC					
CAGE NUMBER	SIZE	DRAWING NO.			REV.
D	78-5100-2132-8	C			
MODEL	3357	DET.	LISTS		☐ YES ☒ NO
					SHT 2 OF 4


3M™ Display and Electronics Product Platform, (DEPP)
Transportation and Electronics Business Group (TEBG)
<http://www.3m.com/interconnect>

3M IS A TRADEMARK OF 3M COMPANY.
FOR TECHNICAL, SALES OR ORDERING
INFORMATION CALL 800-225-5373


3M™ D-SUB EMI JUNCTION SHELL
METALIZED PLASTIC

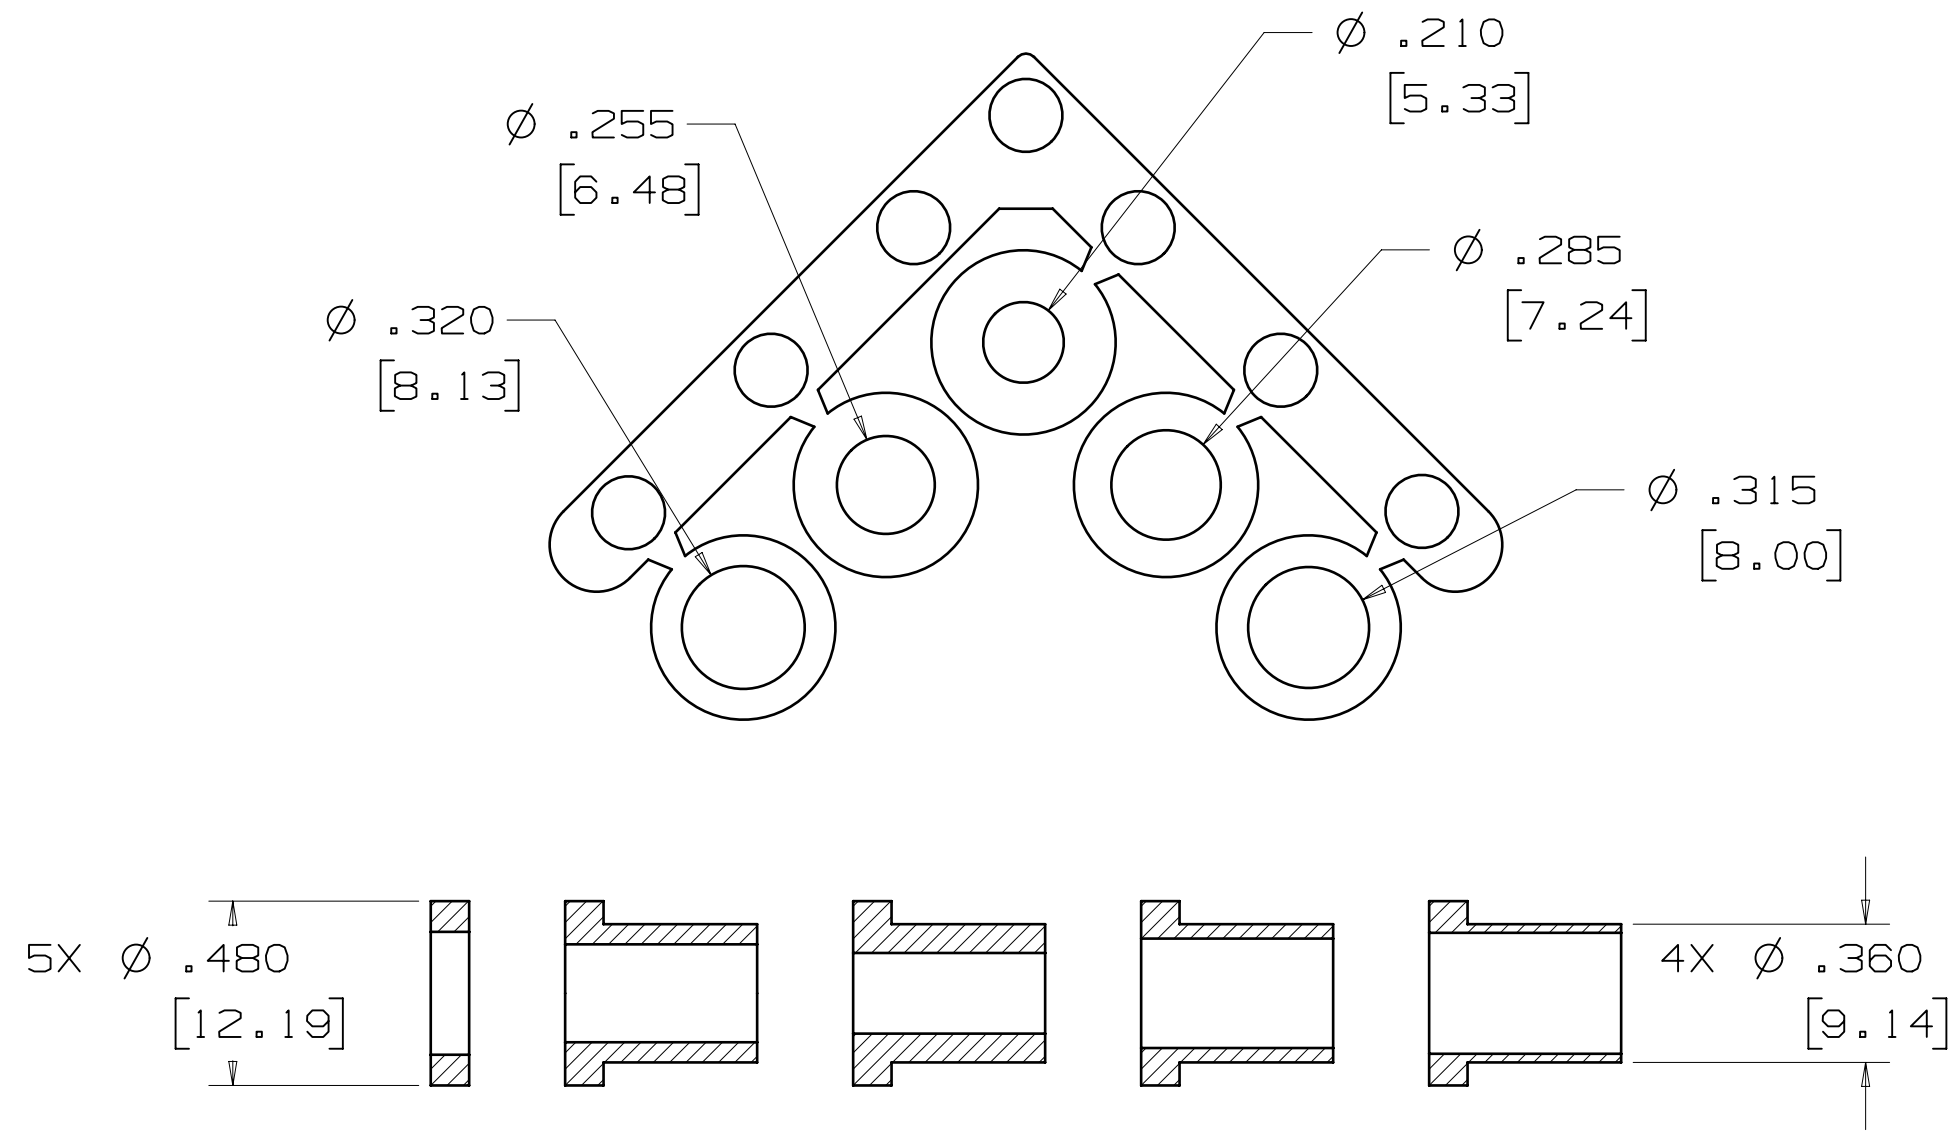

COMPRESSION INSERT TREE
3357-6209-1C AND 3357-6215-1C
QTY: 1

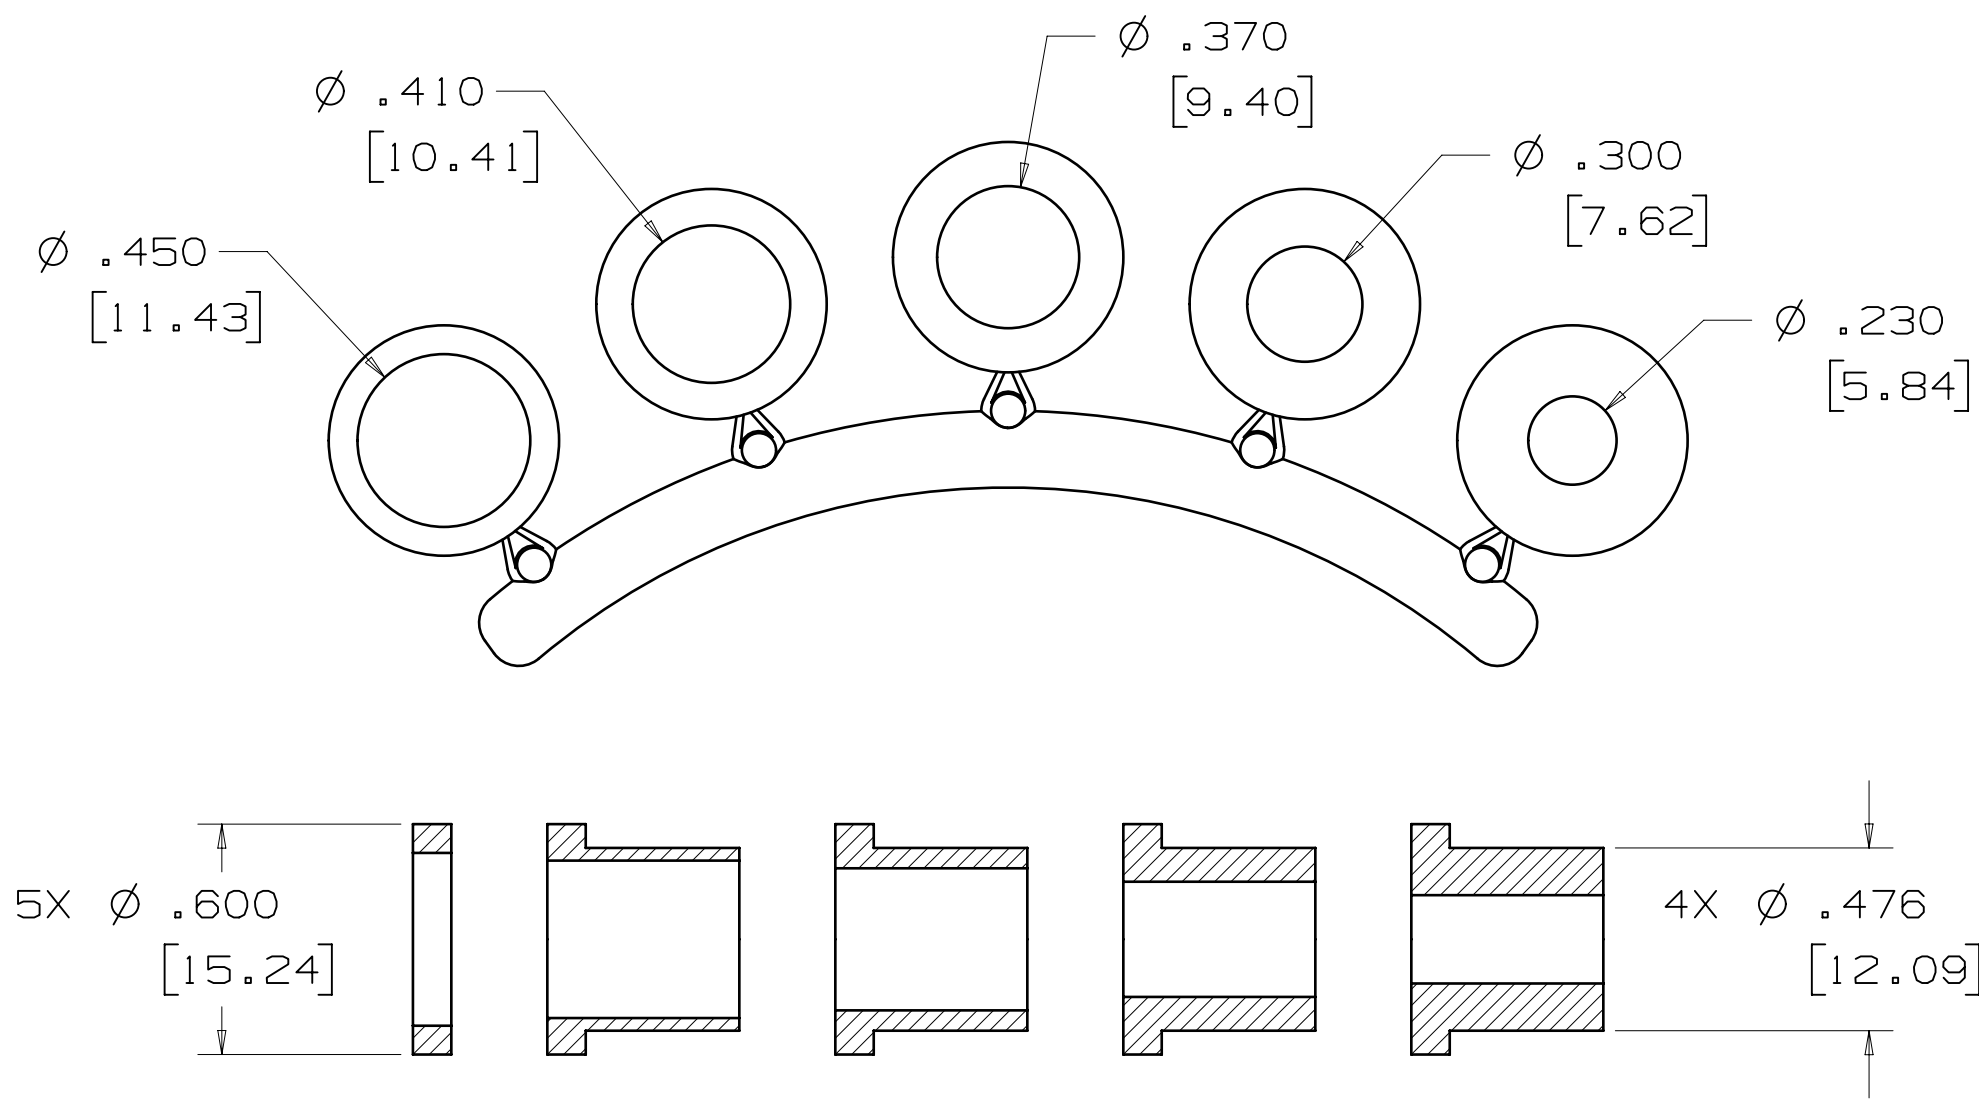

COMPRESSION INSERT TREE
3357-6225-1C
QTY: 1

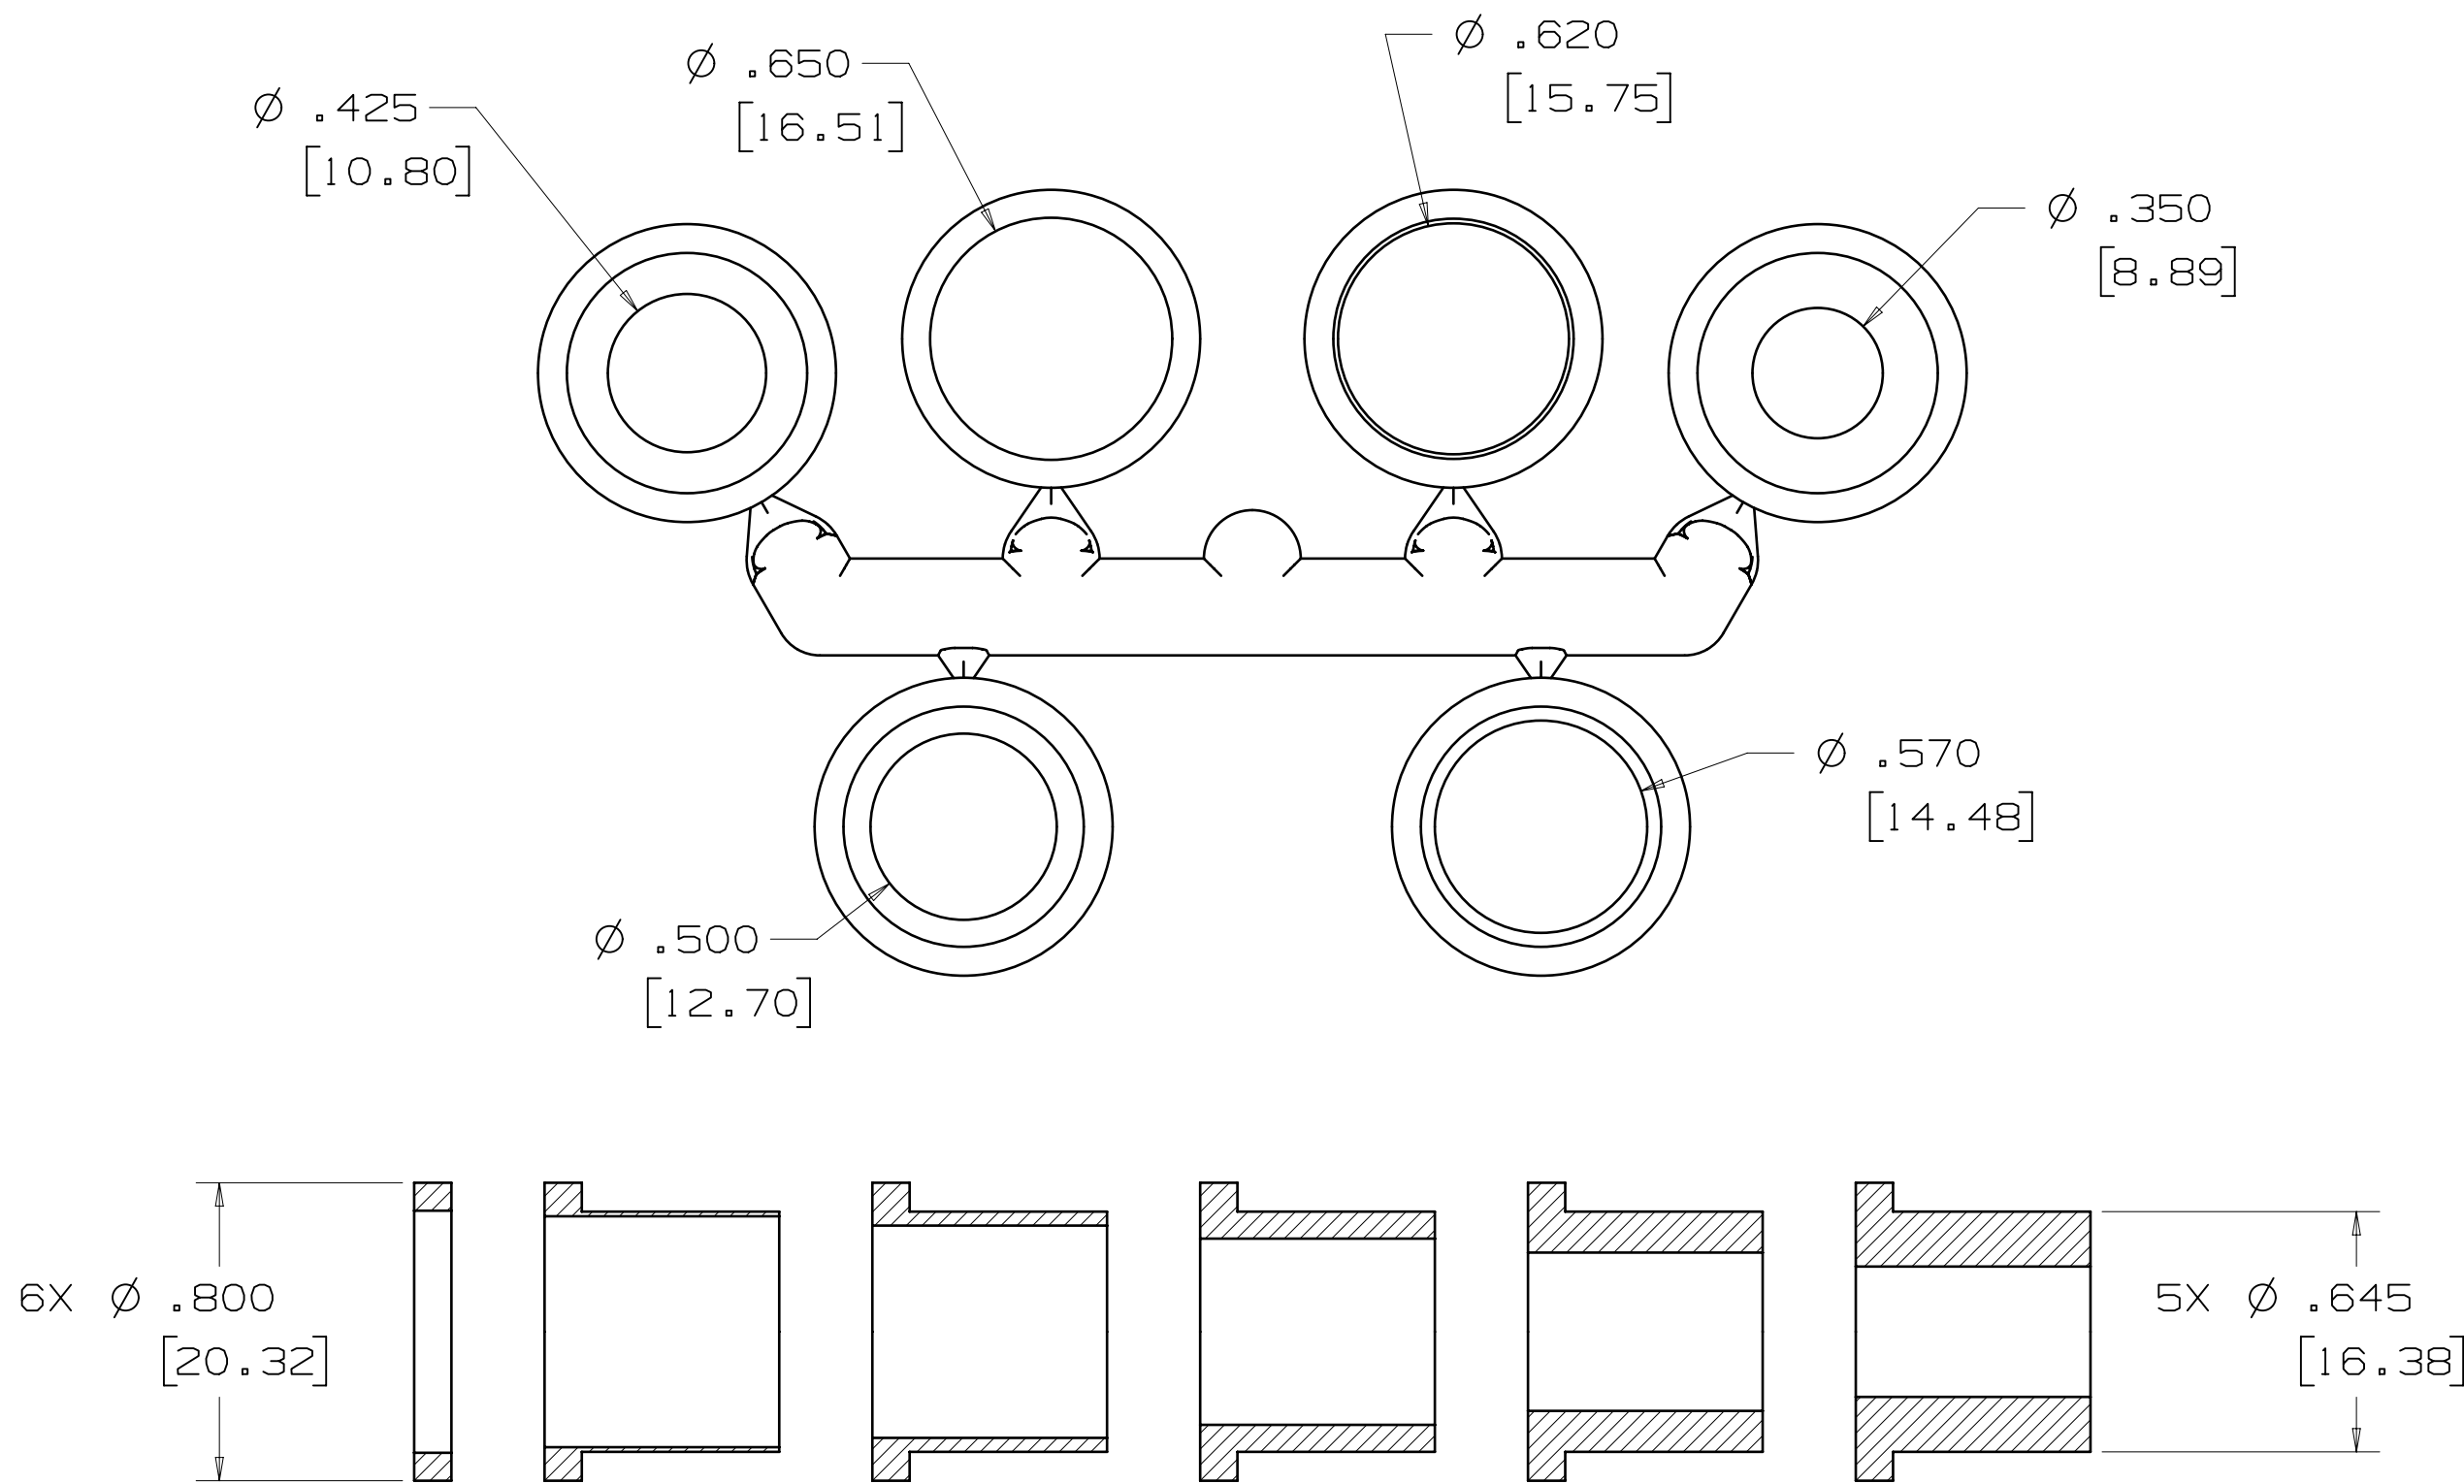

COMPRESSION INSERT TREE
3357-6237-1C AND 3357-6250-1C
QTY: 1

INCH [MM]	
TOLERANCE FOR INSERTS ONLY	
INCH ±.020	
[] = DIM. FOR REFERENCE ONLY	

DESIGN REFERENCE	NEXT ASSEMBLY	REV	ECO	ISSUE DATE AND DESCRIPTION	DRFT	CHKD
CODES		CHKD	CHKD	DATE	DATE	DATE
DIVISION	DIVISION CODE	CHKD	CHKD	DATE	DATE	DATE
DO NOT SCALE DRAWING	SCALE	CHKD	CHKD	DATE	DATE	DATE
THIRD ANGLE PROJECTION	INTERPRET PER ASME Y14.5 - 2018	CHKD	CHKD	DATE	DATE	DATE
MAX SURFACE ROUGHNESS	MAX SURFACE ROUGHNESS	CHKD	CHKD	DATE	DATE	DATE
MARKED ONLY	MARKED ONLY	CHKD	CHKD	DATE	DATE	DATE

3M	3M Center St. Paul, MN 55144	© 3M COPYRIGHT 2025	This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.
TITLE	D-SUB EMI JUNCTION SHELL, METALIZED PLASTIC		
CAGE NUMBER	SIZE	DRAWING NO.	REV.
D	78-5100-2132-8	C	
MODEL	3357	DET	LISTS YES NO SHT 3 OF 4

3M™ Display and Electronics Product Platform, (DEPP)
Transportation and Electronics Business Group (TEBG)
<http://www.3M.com/interconnect>

3M IS A TRADEMARK OF 3M COMPANY.
FOR TECHNICAL, SALES OR ORDERING
INFORMATION CALL 800-225-5373

3M™ D-SUB EMI JUNCTION SHELL
METALIZED PLASTIC

Regulatory: For regulatory information about this product, visit 3M.com/regs or contact your 3M representative.

Technical Information: The technical information, guidance, and other statements contained in this document or otherwise provided by 3M are based upon records, tests, or experience that 3M believes to be reliable, but the accuracy, completeness, and representative nature of such information is not guaranteed. Such information is intended for people with knowledge and technical skills sufficient to assess and apply their own informed judgment to the information. No license under any 3M or third party intellectual property rights is granted or implied with this information.


Product Use: Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. As a result, customer is solely responsible for evaluating the product and determining whether it is appropriate and suitable for customer's application, including conducting a workplace hazard assessment and reviewing all applicable regulations and standards (e.g., OSHA, ANSI, etc.). Failure to properly evaluate, select, and use a 3M product in accordance with all applicable instructions and with appropriate safety equipment, or to meet all applicable safety regulations, may result in injury, sickness, death, and/or harm to property.

Warranty, Limited Remedy, and Disclaimer: Unless a different warranty is specifically stated on the applicable 3M product packaging or product literature (in which case such warranty governs), 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM, OR USAGE OF TRADE. If a 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement or repair of the 3M product or refund of the purchase price.

Limitation of Liability: Except for the limited remedy stated above, and except to the extent prohibited by applicable law, 3M will not be liable for any loss or damage arising from or related to the 3M product, whether direct, indirect, special, incidental, or consequential (including, but not limited to, lost profits or business opportunity), regardless of the legal or equitable theory asserted, including, but not limited to, warranty, contract, negligence, or strict liability.

Disclaimer: For industrial use only. Not intended, labeled or packaged for consumer sale or use.

3M Company
Electronics Materials Solutions Division
13011 McCallen Pass, Bldg. C
Austin, TX 78753-5380
1-800-225-5373
www.3M.com/interconnect

		C	123948	JUN 11,2025 REVISE AND REDRAWN		JNC	FJR
		B	118894	SEP 30,2024 REVISE TOLERANCE & REDRAWN		JNC	FJR
		A	AT2177	SEP 26,2024 MIGRATED FROM ANOTHER DATABASE		--	--
DESIGN REFERENCE			NEXT ASSEMBLY			REV	ECO
ACCESS CODES			DRAFT CASTIGLIONE		DATE SEP 26,2024	MFG DATE	DATE
DIVISION			CHKD		DATE	APPROV F. RODRIGUEZ	DATE SEP 26,2024
DO NOT SCALE DRAWING			TOLERANCES EXCEPT AS NOTED		© 3M COPYRIGHT 2025 This document and the information it contains are 3M property and may not be reproduced or further distributed without the 3M permission, or used or disclosed otherwise for any 3M authorized purposes. All rights reserved.		
			INCHES 0 ± .00 ± .000 ± .0000 ±		TITLE D-SUB EMI JUNCTION SHELL, METALIZED PLASTIC		
THIRD ANGLE PROJECTION			MILLIMETERS 0 ± .0 ± .00 ± .000 ±		CAGE NUMBER SIZE DRAWING NO.		
MAX SURFACE ROUGHNESS ✓  MIN SURFACES			ANGLE		REV. C		
□ MARKED ONLY			3357		DET. LISTS ☐ YES ☒ NO SHT 4 OF 4		