


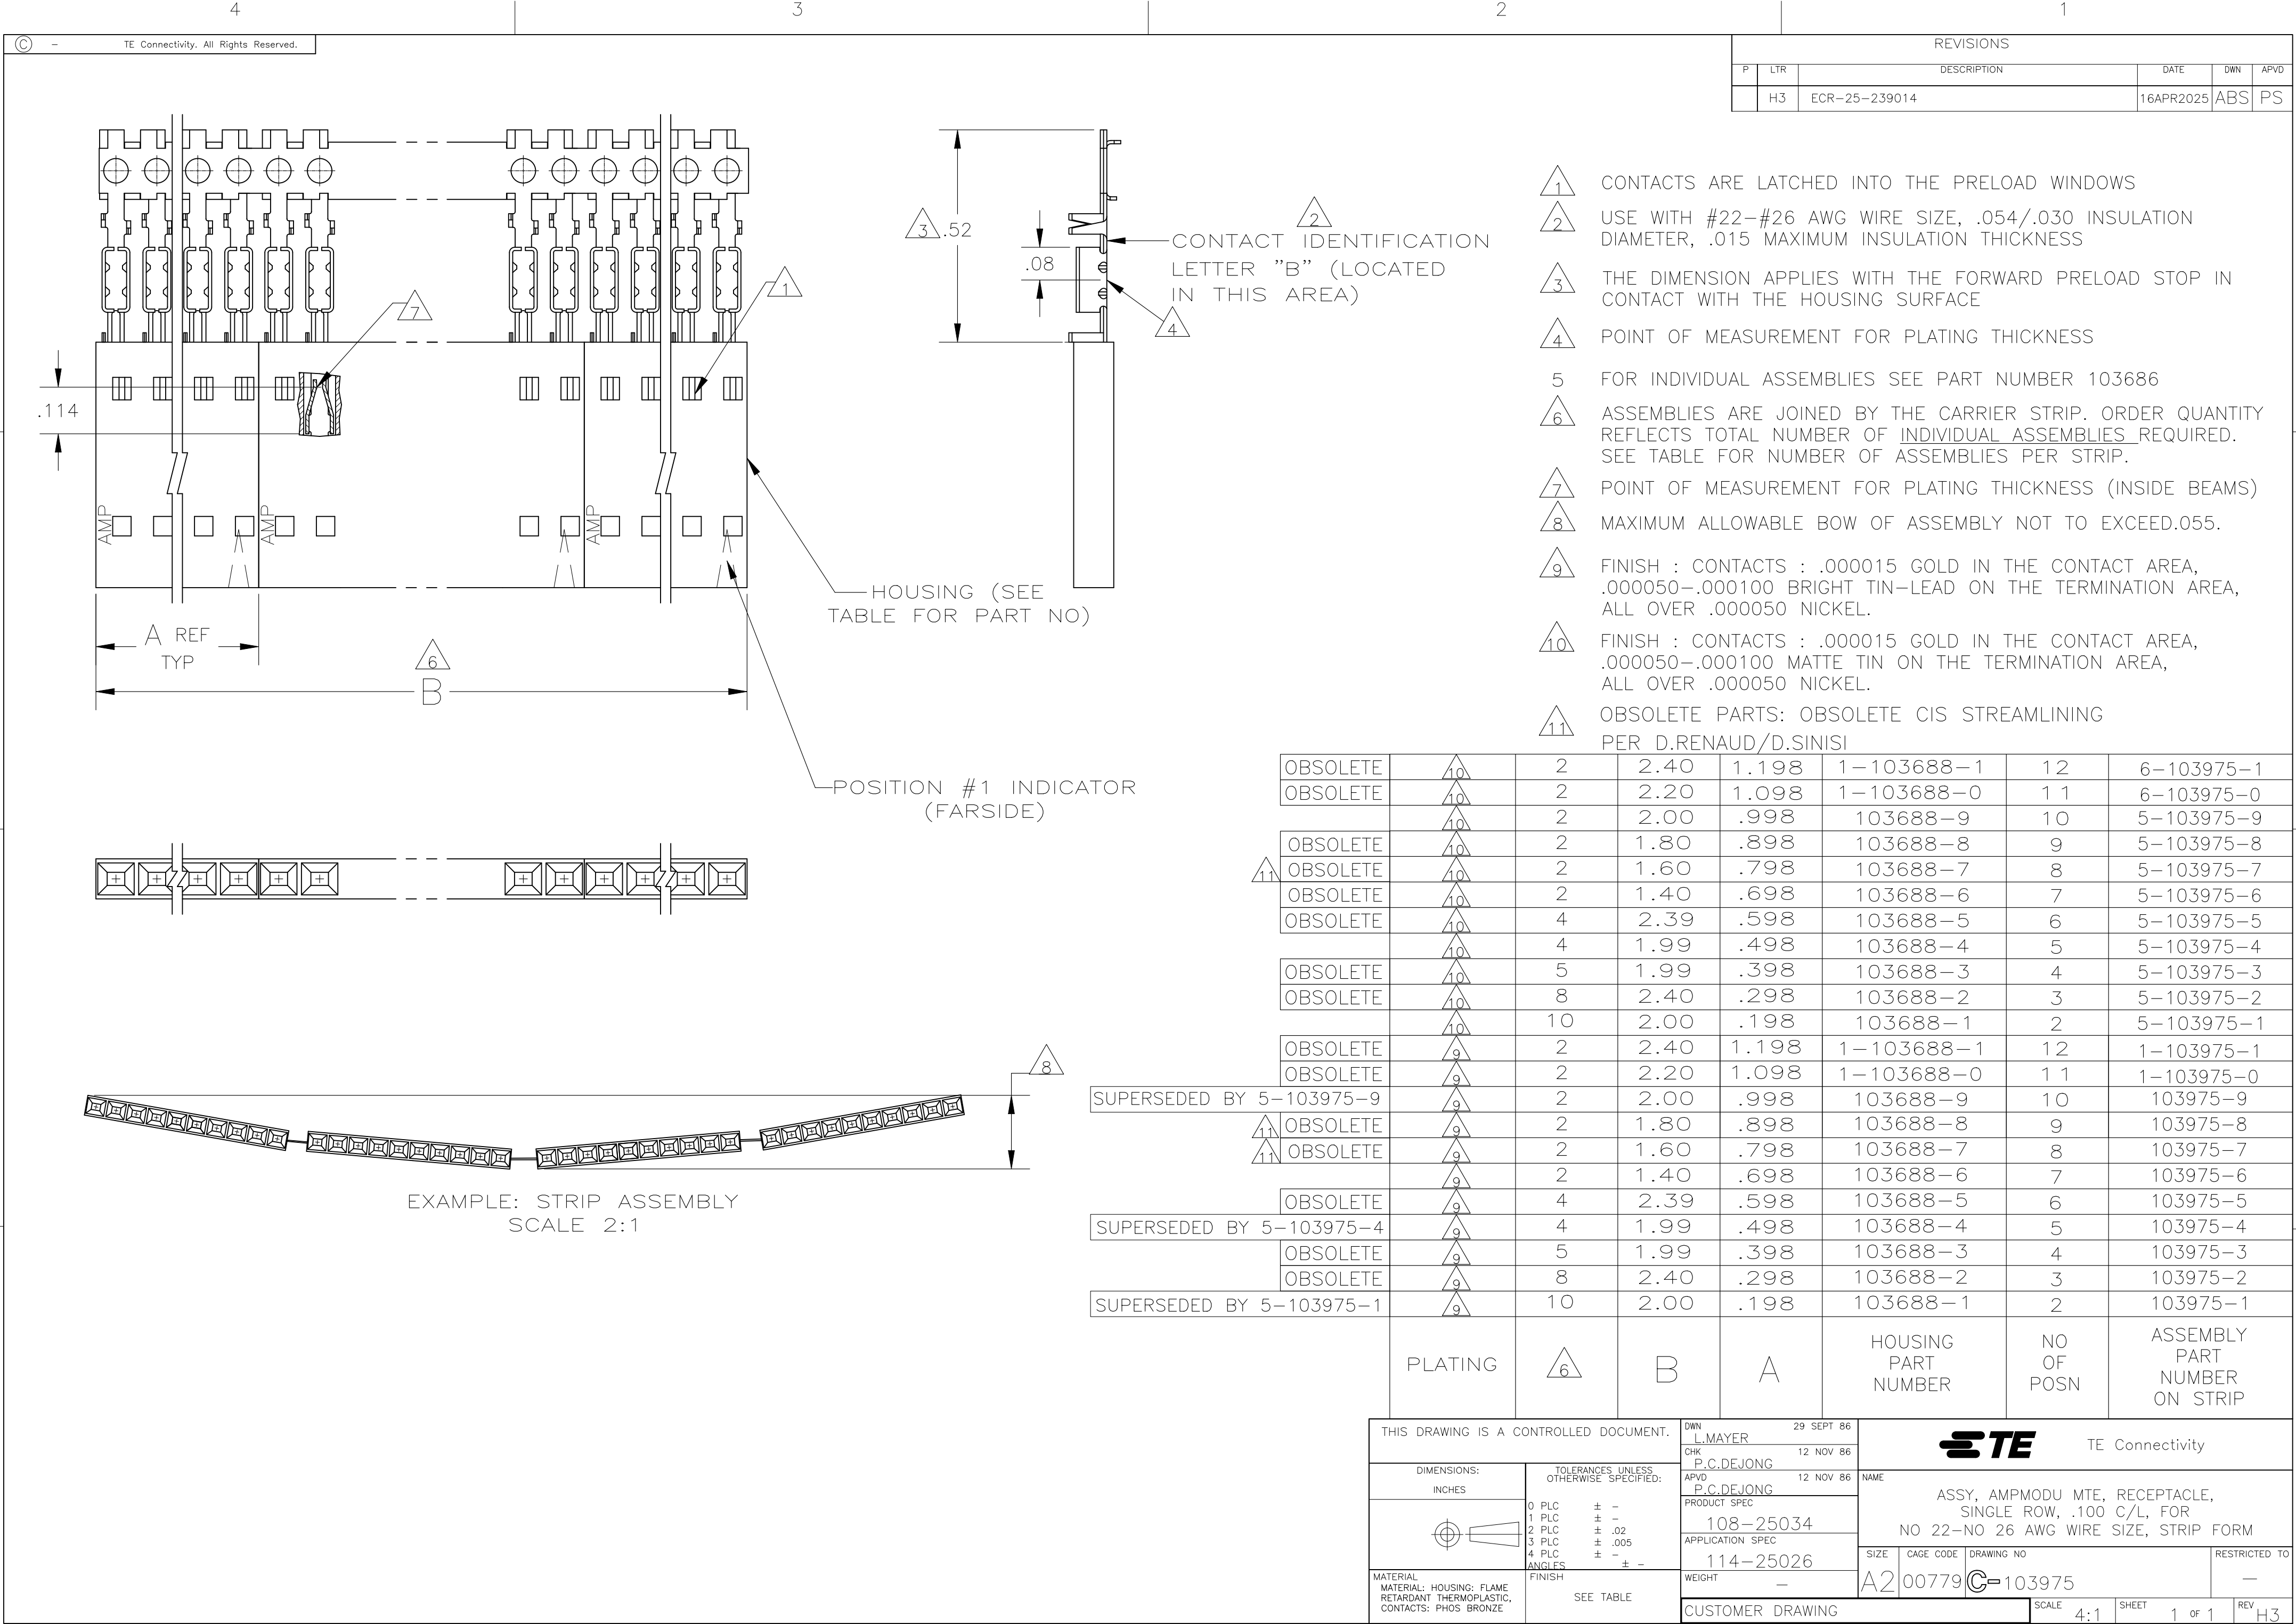

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	H3	ECR-25-239014	16APR2025	ABS	PS

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2 USE WITH #22-#26 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103686
- 6 ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- 7 POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
- 8 MAXIMUM ALLOWABLE BOW OF ASSEMBLY NOT TO EXCEED .055.
- 9 FINISH : CONTACTS : .000015 GOLD IN THE CONTACT AREA, .000050-.000100 BRIGHT TIN-LEAD ON THE TERMINATION AREA, ALL OVER .000050 NICKEL.
- 10 FINISH : CONTACTS : .000015 GOLD IN THE CONTACT AREA, .000050-.000100 MATTE TIN ON THE TERMINATION AREA, ALL OVER .000050 NICKEL.
- 11 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

OBSOLETE	10	2	2.40	1.198	1-103688-1	12	6-103975-1
OBSOLETE	10	2	2.20	1.098	1-103688-0	11	6-103975-0
	10	2	2.00	.998	103688-9	10	5-103975-9
OBSOLETE	10	2	1.80	.898	103688-8	9	5-103975-8
11 OBSOLETE	10	2	1.60	.798	103688-7	8	5-103975-7
OBSOLETE	10	2	1.40	.698	103688-6	7	5-103975-6
OBSOLETE	10	4	2.39	.598	103688-5	6	5-103975-5
	10	4	1.99	.498	103688-4	5	5-103975-4
OBSOLETE	10	5	1.99	.398	103688-3	4	5-103975-3
OBSOLETE	10	8	2.40	.298	103688-2	3	5-103975-2
	10	10	2.00	.198	103688-1	2	5-103975-1
OBSOLETE	9	2	2.40	1.198	1-103688-1	12	1-103975-1
OBSOLETE	9	2	2.20	1.098	1-103688-0	11	1-103975-0
SUPERSEDED BY 5-103975-9	9	2	2.00	.998	103688-9	10	103975-9
11 OBSOLETE	9	2	1.80	.898	103688-8	9	103975-8
11 OBSOLETE	9	2	1.60	.798	103688-7	8	103975-7
	9	2	1.40	.698	103688-6	7	103975-6
OBSOLETE	9	4	2.39	.598	103688-5	6	103975-5
SUPERSEDED BY 5-103975-4	9	4	1.99	.498	103688-4	5	103975-4
	9	5	1.99	.398	103688-3	4	103975-3
OBSOLETE	9	8	2.40	.298	103688-2	3	103975-2
SUPERSEDED BY 5-103975-1	9	10	2.00	.198	103688-1	2	103975-1

PLATING	6	B	A	HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER ON STRIP
---------	---	---	---	---------------------	------------	-------------------------------

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L.MAYER 29 SEPT 86	TE Connectivity			
		CHK P.C.DEJONG 12 NOV 86				
DIMENSIONS: INCHES		APVD P.C.DEJONG 12 NOV 86	NAME			
		PRODUCT SPEC 108-25034	ASSY, AMPMODU MTE, RECEPTACLE, SINGLE ROW, .100 C/L, FOR NO 22-NO 26 AWG WIRE SIZE, STRIP FORM			
		APPLICATION SPEC 114-25026				
MATERIAL: HOUSING: FLAME RETARDANT THERMOPLASTIC, CONTACTS: PHOS BRONZE		WEIGHT -	SIZE A2	CAGE CODE 00779	DRAWING NO C=103975	RESTRICTED TO -
CUSTOMER DRAWING			SCALE 4:1	SHEET 1 OF 1	REV H3	