

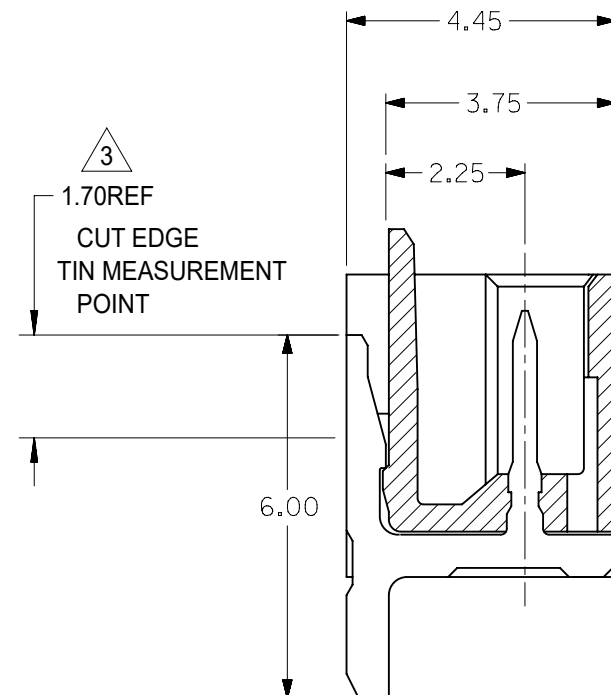
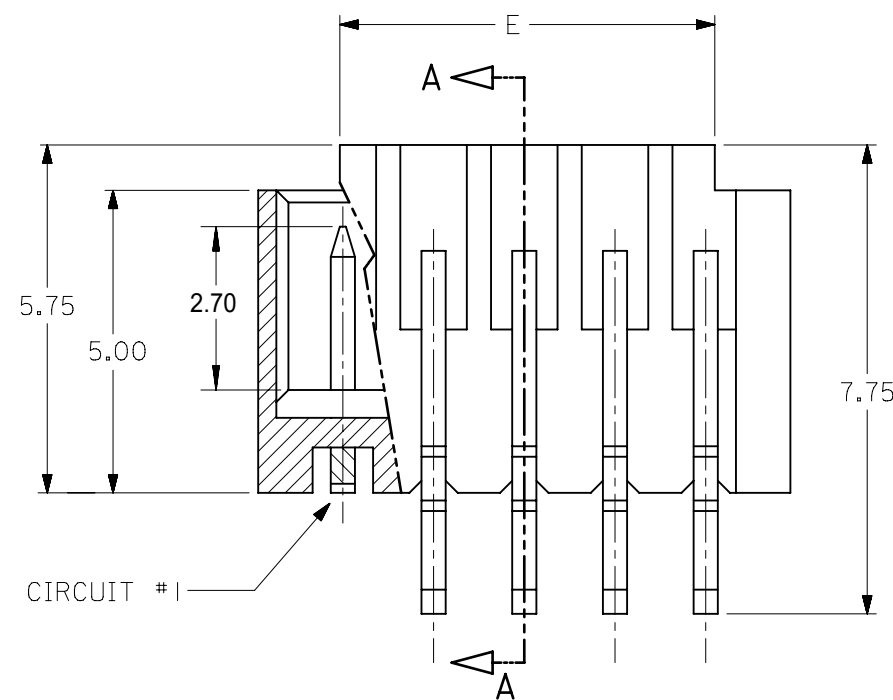
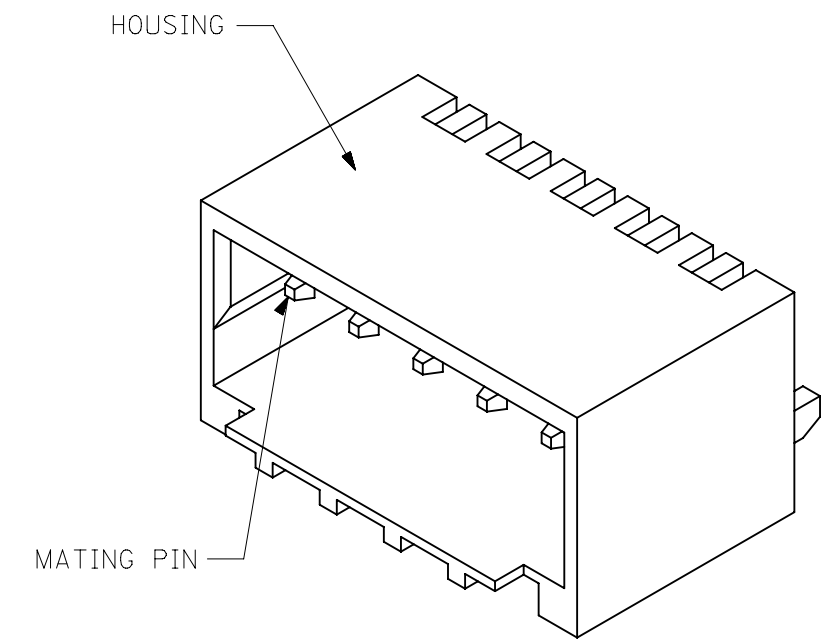
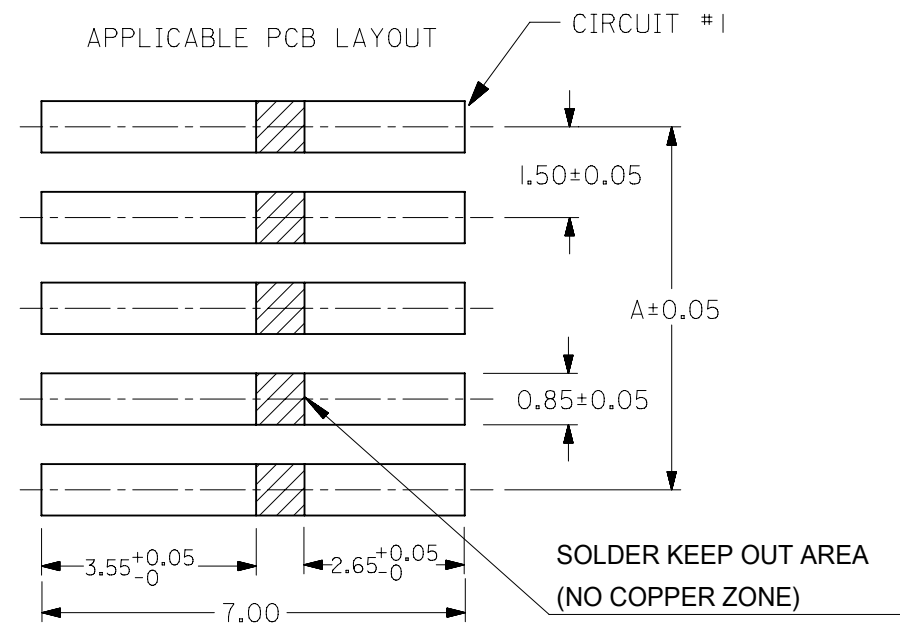


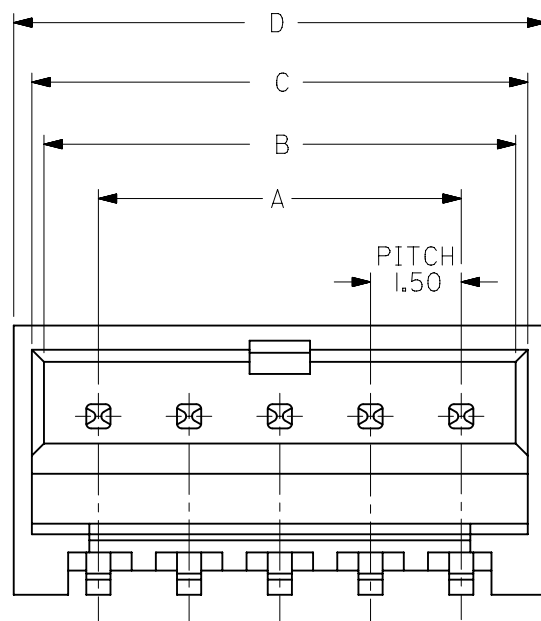

SECTION A-A

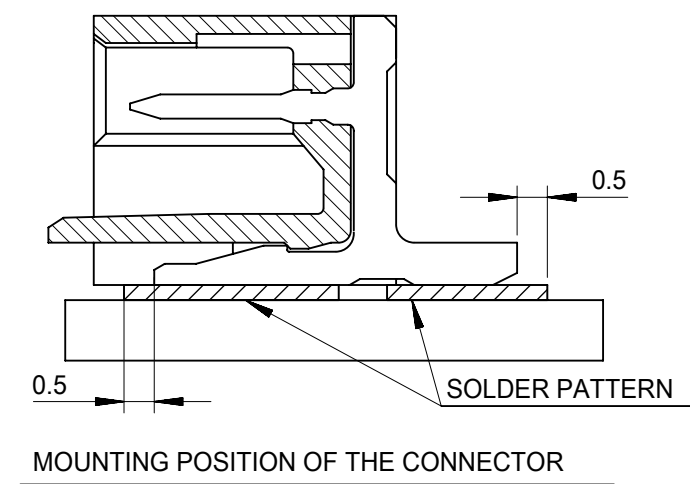

NOTES:


1. MATERIALS:
HOUSING : GLASS-FILLED LIQUID CRYSTAL POLYMER,
UL RATED 94V-0
COLOR: BEIGE
PINS: BRASS ALLOY, C26000
2. PLATING: 2.54 μ M MIN. TIN OVER 1.27 μ M MIN. NICKEL EXCEPT AT
CUT-EDGE WHERE THICKNESS CAN BE 1.90 μ M MIN.
3. CUT-EDGE TIN MEASUREMENT POINT.
4. DRAWING SHOWS PLUG WITH 5 CIRCUITS.
5. HEADER TO BE USED WITH CRIMP HOUSING, P/N 87439
AND CRIMP TERMINAL, P/N 87421
6. PRODUCT SPEC. PS-78047-001 APPLIES.

GENERAL TOLERANCES (UNLESS SPECIFIED)		
10 ^{UNDER}		± 0.20
10 ^{OVER}	30 ^{UNDER}	± 0.20
30 ^{OVER}		± 0.20
ANGULAR		$\pm 3^\circ$
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		



THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													
DIMENSION UNITS		SCALE		CURRENT REV DESC: REMOVED OBSOLETE PART NUMBERS AS PER PCN#515932.				molex					
mm		NTS											
GENERAL TOLERANCES (UNLESS SPECIFIED)				HEADER, 1.50MM PITCH W-T-B, R/A, SMT									
				ANGULAR TOL		± 3.0°		PRODUCT CUSTOMER DRAWING					
				4 PLACES		± 0.2							
				3 PLACES		± 0.2							
2 PLACES		± 0.2		DOCUMENT NUMBER SD-78048-001									
1 PLACE		±											
0 PLACES		±											
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				EC NO: 812554		2025/01/31		DOC TYPE PSD					
				DRWN: RAVINR1		2025/02/25							
INITIAL REVISION:				CHK'D: GGA		2025/02/25		DOC PART 001					
				APPR: GGA		2025/02/25							
THIRD ANGLE PROJECTION				SERIES		2007/07/30		SHEET NUMBER 1 OF 3					
				A3-SIZE		2007/07/31							
DRAWING				MATERIAL NUMBER		CUSTOMER		GENERAL MARKET					
				A3-SIZE		SEE TABLE							

[illegible]

10	9	8	7	6	5	4	3	2	1
15	44	20.20	100	44.40	50.40				
11, 12, 13, 14	32	14.20	100	32.40	38.40				
7, 8, 9, 10	24	11.50	100	24.40	30.40				
2, 3, 4, 5, 6	16	7.50	100	16.40	22.40				
CIRCUIT SIZE	A	B	N	G	T MAX				

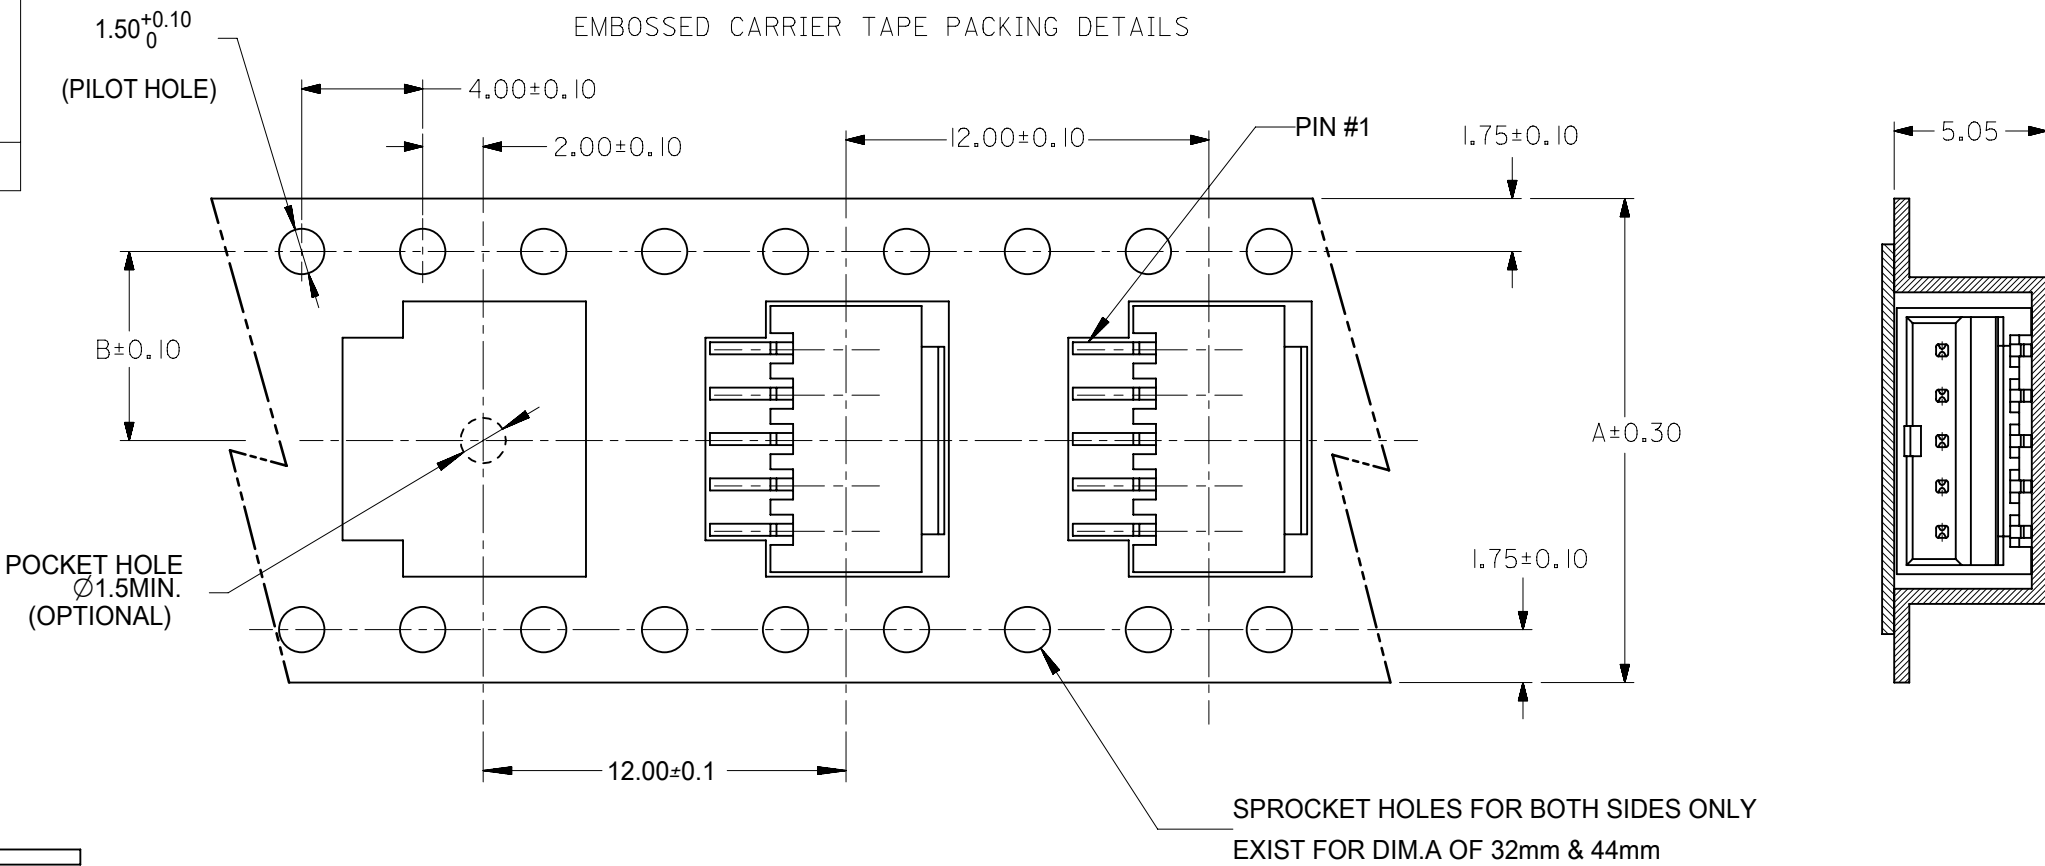


REEL DETAILS

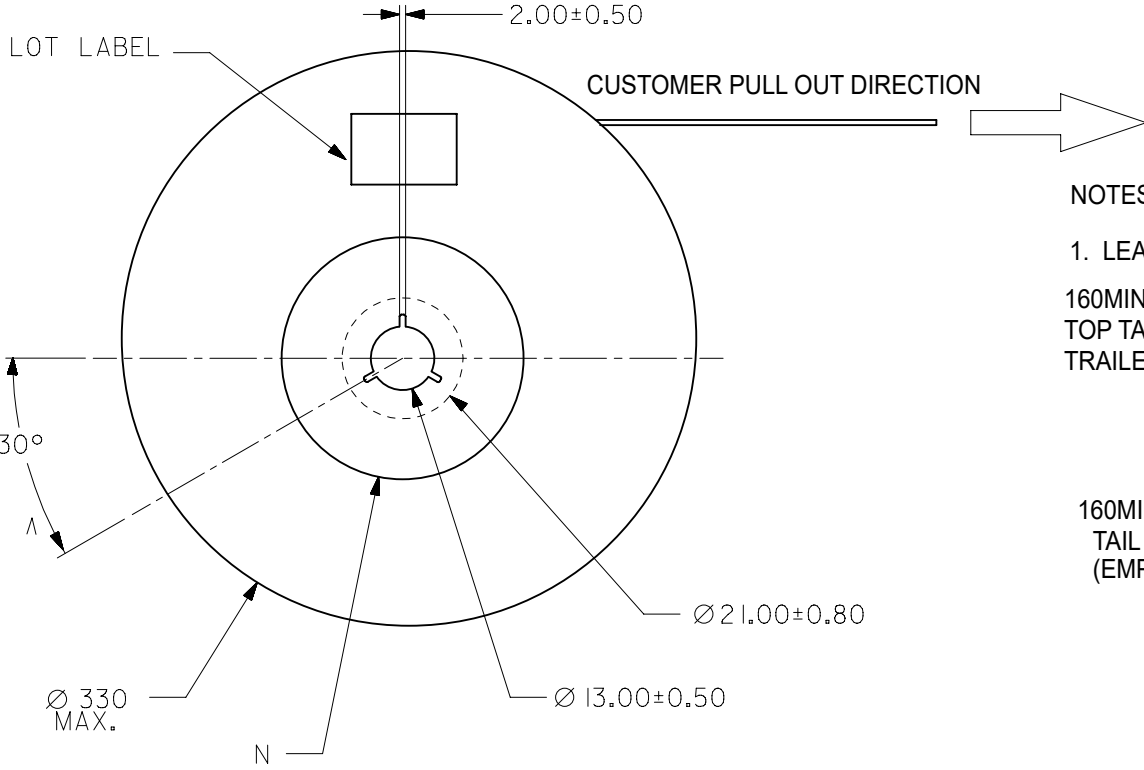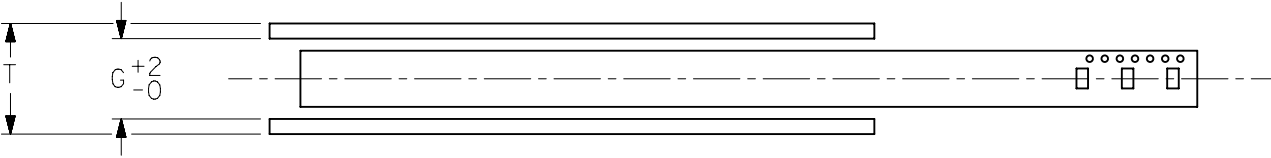


NOTES:

1. LEADER AND TRAILER TAPE

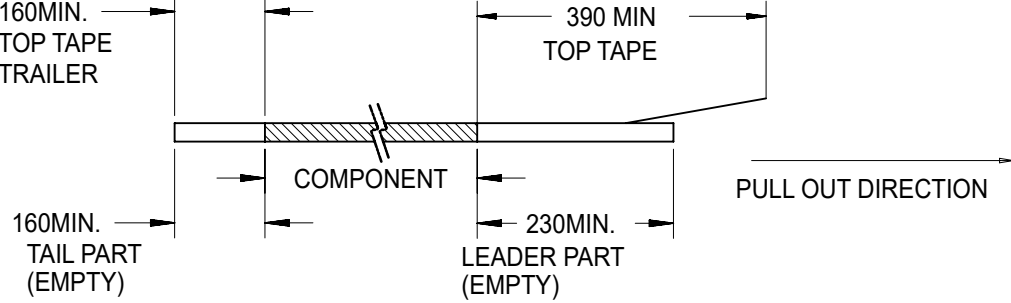

2. PEELING OFF FORCE OF THE TOP TAPE: 20-80gf.
(PEELING DIRECTION AS SHOWN IN FOLLOWING FIGURE)



- 3. PACKAGING STANDARD IS AS PER EIA-481.
- 4. TAPE & REEL QUANTITY = 1000PCS/REEL
- 5. THE TAPE IS TREATED FOR ANTI-STATIC

GENERAL TOLERANCES (UNLESS SPECIFIED)		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC: REMOVED OBSOLETE PART NUMBERS AS PER PCN#515932.				molex			
10 UNDER		± 0.20		mm		NTS		HEADER, 1.50MM PITCH W-T-B, R/A, SMT			
10 OVER 30 UNDER		± 0.20		GENERAL TOLERANCES (UNLESS SPECIFIED)		ANGULAR TOL ± 3.0 °		PRODUCT CUSTOMER DRAWING			
30 OVER		± 0.20		4 PLACES ± 0.2		3 PLACES ± 0.2		DOCUMENT NUMBER			
ANGULAR ± 3 °		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		2 PLACES ± 0.2		1 PLACE ±		SD-78048-001			
				0 PLACES ±		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DOC TYPE DOC PART REVISION			
								PSD 001 C2			
								SHEET NUMBER			
								3 OF 3			