
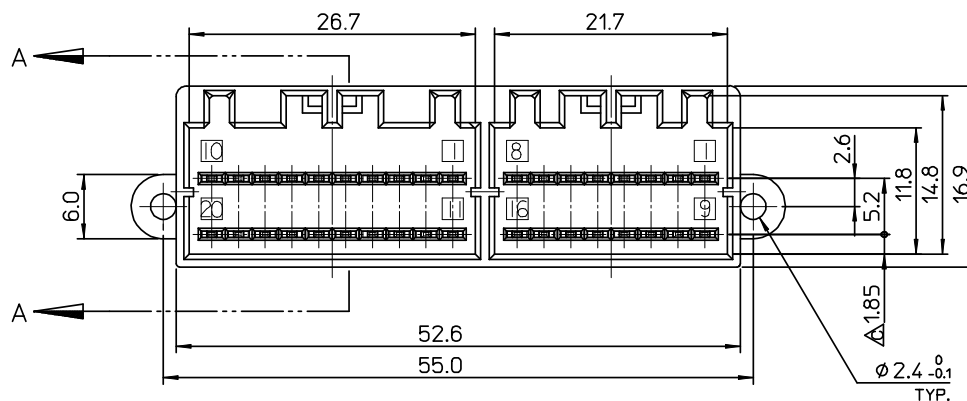

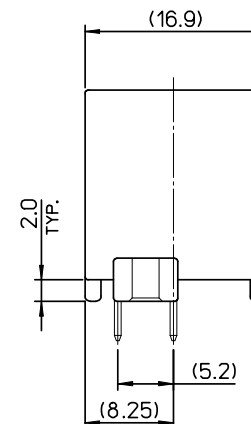


RECOMMENDED P.C.B HOLE DIMENSION

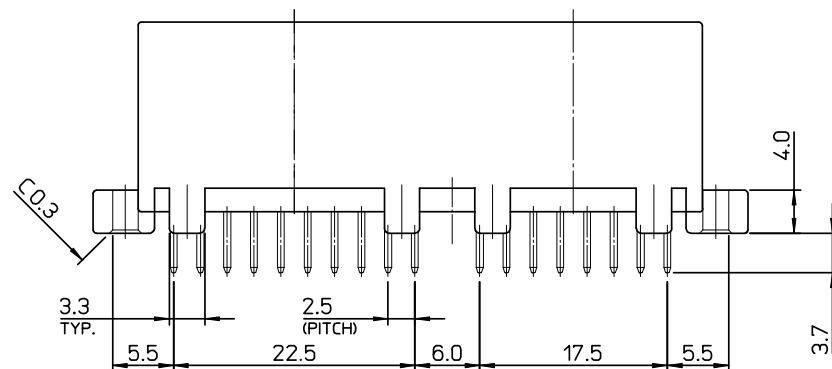

SECTION A-A

NOTES

1. APPLICABLE FEMALE HOUSING : 35363-1615/35364-2015
2. TEMPERATURE RANGE : -40°C TO +120°C
3. MATERIAL : HOUSING-POLYESTER(PBT), COLOF:GRAY
TERMINAL-BRASS
TERMINAL-TIN(Sn) PLATED

REV	DESCRIPTION	DATE
1	REVISED	2008/01/31
2	EC NO: KOR2008-0116	2008/02/14
3	DRW:NEOKIM	2008/02/14
4	CHKD:BCYOON	2008/02/14
5	APPR:YUNSIKKIM	2008/02/14

QUALITY SYMBOLS
▽=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.20	± ---
1 PLACE	± 0.30	± ---
ANGULAR ± 2 °		

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE MM ONLY

DRAWN BY	DATE
YSIKKIM	2001/01/15
CHECKED BY	DATE
YSIKKIM	2001/01/15
APPROVED BY	DATE
CWLEE	2001/01/15

MATERIAL NO.
681453615

SCALE 2:1

TITLE

DESIGN UNITS METRIC

040 WIRE TO BOARD CONN.
36P HEADER ASS'Y(VTL)



MOLEX INCORPORATED

DOCUMENT NO.
SD-68145-003

SHEET NO.
1 OF 1

NO.	ENG NO.	MATERIAL NO.
1	68145-3615	681453615

THIRD ANGLE PROJECTION