
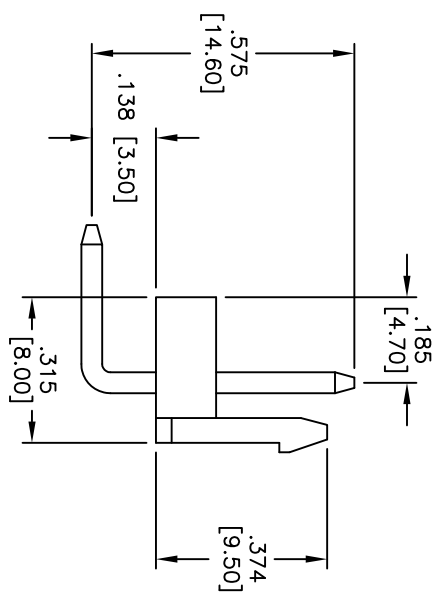
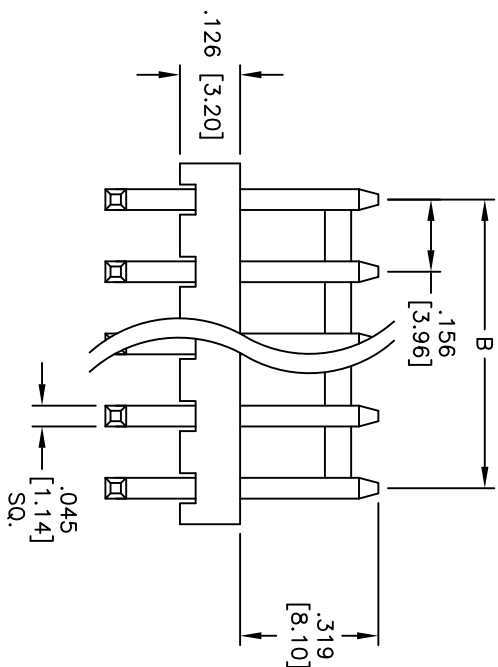
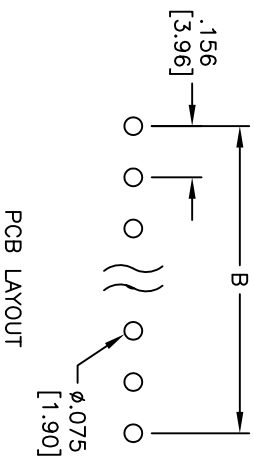


APPROVED: \_\_\_\_\_  
DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

| Rev | AWO # | Description  | Date    | Appr |
|-----|-------|--------------|---------|------|
| -   |       | RELEASED     | 4/12/05 |      |
| A   |       | UPDATED DIM. | 3/20/15 | HR/L |

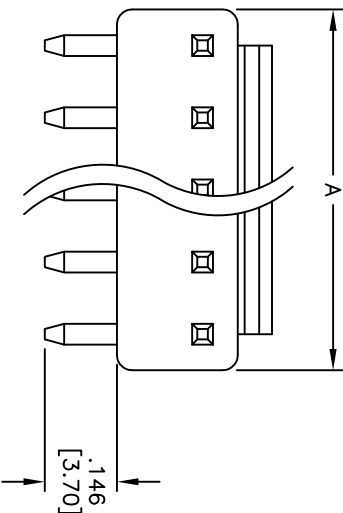

SPECIFICATIONS:

Material:  
Insulator: Nylon, rated UL 94V-2  
Insulator color: White  
Contacts: Brass  
Plating:  
Tin over Copper underplate overall  
Electrical:  
Operating voltage: 250 VAC/DC max  
Current rating: AC/DC 5 Amps max  
Contact resistance: 20 mohms max  
Insulation resistance: 1,000 Mohms min  
Dielectric withstanding voltage: 1,500 VAC for 1 minute  
Temperature Rating:  
Operating temperature: -25°C to +85°C  
Environmental:  
Lead free, RoHS compliant

Positions: 2 thru 12  
A = .156 [3.96] x No. of Positions + .008 [0.20]  
B = .156 [3.96] x No. of Spaces

UNLESS OTHERWISE SPECIFIED  
ALL DIMENSIONS ARE INCHES [MM]  
TOLERANCES: EXCEPT AS NOTED  
INCHES  
.X ± .10  
.XX ± .020  
.XXX ± .015

HOLESDIA ± .10  
DIA ± .015  
DIA ± .010

APPROVALS  
DATE

DRAWN SS 4/12/05

CHECKED

APPROVED

ADAM TECH  
909 Rahway Avenue, Union, NJ 07083  
Phone: 908-687-5000 Fax: 908-687-5710

TITLE  
.156 [3.96] POWER HEADER  
RIGHT ANGLE, WITH REAR LOCK

SIZE X  
PART NO. LHC-XX-TRA  
REV. A

REF: S00016T  
SCALE: NTS  
SHEET 1 OF 1