

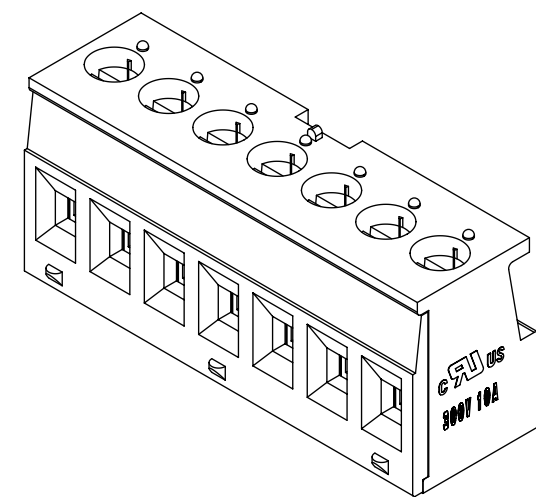
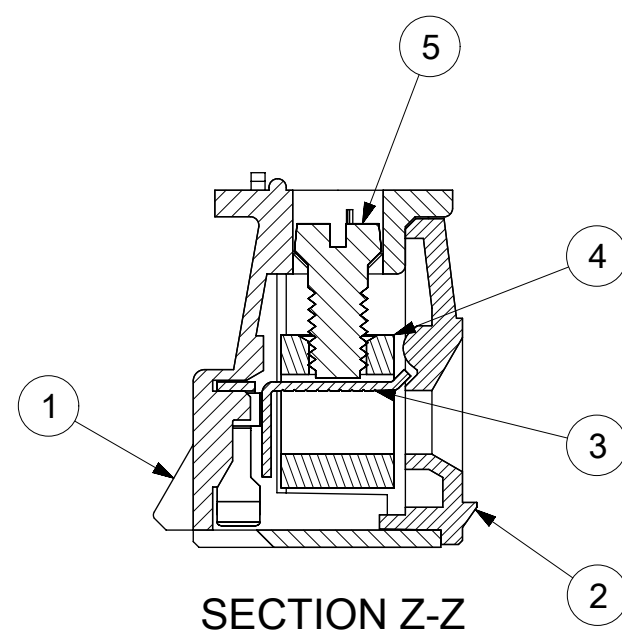
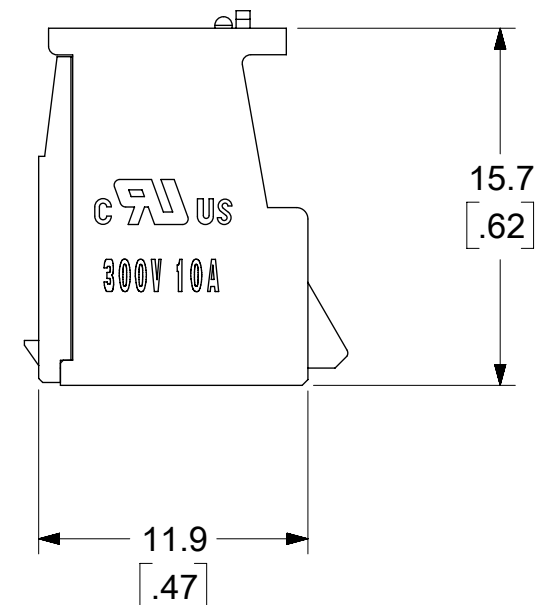


12		11		10		9		8	
H	NUMBER OF CIRCUITS "XX"	MATERIAL NO.	ENG. NO.	DIM. "A"		DIM. "B"		DIM. "C"	
	02	399801302	980902-1	10.8 [.43]		5.08 [.200]		5.08 [.200]	
	03	399801303	980903-1	15.9 [.63]		10.16 [.400]		10.16 [.400]	
	04	399801304	980904-1	20.9 [.83]		15.24 [.600]		10.16 [.400]	
	05	399801305	980905-1	26.0 [1.03]		20.32 [.800]		10.16 [.400]	
	06	399801306	980906-1	31.1 [1.23]		25.40 [1.000]		15.24 [.600]	
G	07	399801307	980907-1	36.2 [1.43]		30.48 [1.200]		15.24 [.600]	
	08	399801308	980908-1	41.3 [1.63]		35.56 [1.400]		20.32 [.800]	
	09	399801309	980909-1	46.3 [1.83]		40.64 [1.600]		20.32 [.800]	
	10	399801310	980910-1	51.4 [2.03]		45.72 [1.800]		25.40 [1.000]	
	11	399801311	980911-1	56.5 [2.23]		50.80 [2.000]		25.40 [1.000]	
	12	399801312	980912-1	61.6 [2.43]		55.88 [2.200]		30.48 [1.200]	
F	13	399801313	980913-1	66.7 [2.63]		60.96 [2.400]		30.48 [1.200]	
	14	399801314	980914-1	71.8 [2.83]		66.04 [2.600]		35.56 [1.400]	
	15	399801315	980915-1	76.9 [3.03]		71.12 [2.800]		35.56 [1.400]	
	16	399801316	980916-1	81.9 [3.23]		76.20 [3.000]		40.64 [1.600]	
	17	399801317	980917-1	87.0 [3.43]		81.28 [3.200]		40.64 [1.600]	
	18	399801318	980918-1	92.2 [3.63]		86.36 [3.400]		45.72 [1.800]	
E	19	399801319	980919-1	97.3 [3.83]		91.44 [3.600]		45.72 [1.800]	
	20	399801320	980920-1	102.4 [4.03]		96.52 [3.800]		50.80 [2.000]	
	21	399801321	980921-1	107.4 [4.23]		101.60 [4.000]		50.80 [2.000]	
	22	399801322	980922-1	112.5 [4.43]		106.68 [4.200]		55.88 [2.200]	
	23	399801323	980923-1	117.6 [4.63]		111.76 [4.400]		55.88 [2.200]	
	24	399801324	980924-1	122.7 [4.83]		116.84 [4.600]		60.96 [2.400]	

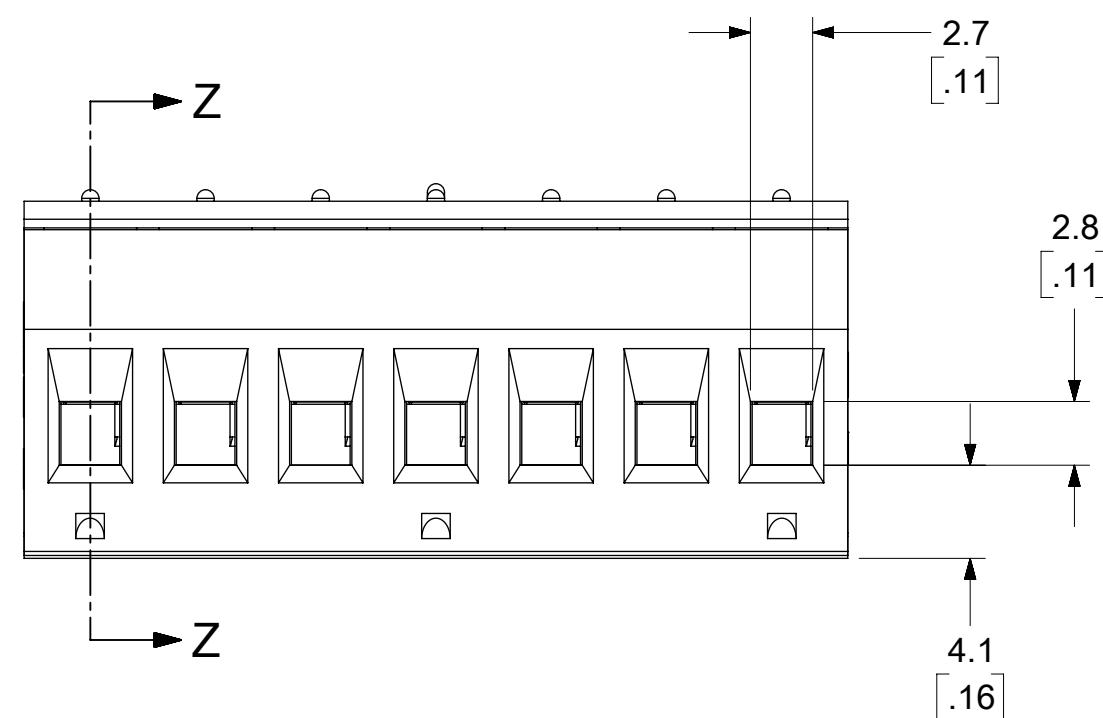

7 CIRCUIT SHOWN
SCALE 2:1

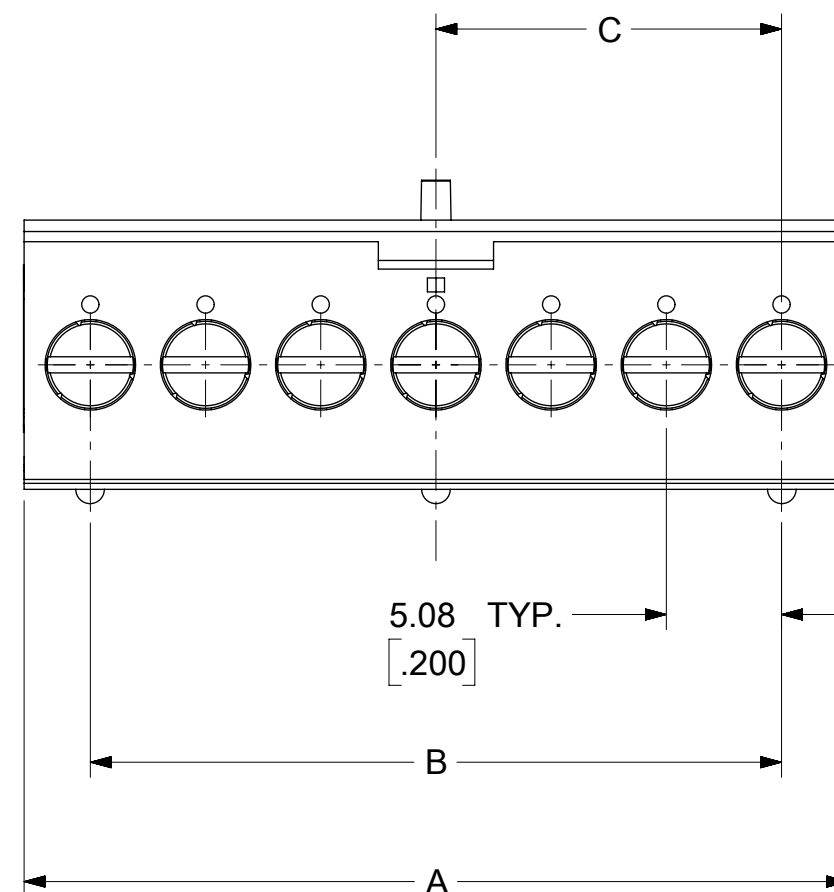

NOTES:

1. MATERIAL: SEE TABLE
2. FINISHES: SEE TABLE
3. ELECTRICAL SPECIFICATIONS
VOLTAGE RATING: 300V AC/DC
CURRENT RATING: 10 AMPS
4. WIRE RANGE: 4.0-0.25mm² (12-24 AWG)
5. RECOMMENDED SCREW TORQUE: 0.56 Nm [5 IN-LB]
6. MATES WITH: 3998004XX HEADER ASSEMBLY
7. ASSEMBLY IS TO BE RoHS COMPLIANT
8. UL FILE: E48521
9. DIMS. SHOWN ARE FOR REFERENCE ONLY

A	5	XX	SCREW, M3X0.5 CHS, SLOTTED	STEEL	ZN, CLEAR CHROMATE
	4	XX	CAGE, RISING(*)	BRASS	NICKEL PLATED
	3	XX	TERMINAL PLUG	PHOS. BRONZE	HOT TIN DIP
	2	1	COVER, 5.08mm PLUG, SINGLE ROW	NYLON 66, GLASS FILLED	BLACK
	1	1	BODY, 5.08mm PLUG, SINGLE ROW	NYLON 66, GLASS FILLED	BLACK
	ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

TOLERANCES			
MM	TOL	INCH	TOL
0-6	±0.25	0-.24	±.010
>6-30	±0.40	.24-1.18	±.016
>30-120	±0.50	1.18-4.76	±.020
>120	±0.80	>4.76	±.031

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
SYMBOLS		DIMENSION UNITS		SCALE		CURRENT REV DESC: ADDED NEW PN'S		molex	
F = 0 F = 0 B = 0		MM[INCH]		3:1		EC NO: 611677 DRWN: ABENJAMINLW 2018/04/27 CHK'D: MBRZOZOWSKI 2019/02/07 APPR: JFMURPHY 2019/02/20			
S = 0 ▽ = 0 ▽ = 0		GENERAL TOLERANCES (UNLESS SPECIFIED)							
						PLUG ASSEMBLY 5.08MM SINGLE ROW			
								PRODUCT CUSTOMER DRAWING	