

printed on 3 Oct 2023 15:33 (India Standard Time) from TE490671


© 2023 TE Connectivity. All Rights Reserved.

REVISIONS






P	LTR	DESCRIPTION	DATE	DWN	APVD
	01	REVISED PER ECO-12-007711	26APR2012	KH	MS
	A	NEW PART NO. 5-1776155-3 IS ADDED	22SEP2023	SP	PS

NOTES:

1. MATERIAL AND FINISH :
HOUSING : HIGH TEMPERATURE POLYAMIDE UL94 V0
HOUSING COLOR : BLACK
TERMINAL : COPPER ALLOY ,TIN PLATED OVER NICKEL UNDERPLATED.
2. ELECTRICAL PROPERTIES:
RATED VOLTAGE: 300V
RATED CURRENT: 15A
CONTACT RESISTANCE : <15 m Ohm
INSULATION RESISTANCE : >1000 M Ohm (500V DC)
3. NOT CUMULATIVE TOLERANCE
4. OPERATING TEMPERATURE RANGE : -40°C TO +105°C.
5. PACKAGING:BULK PACKING AS PER 107-160052
6. PACKAGING:T & R PACKING AS PER 107-160194

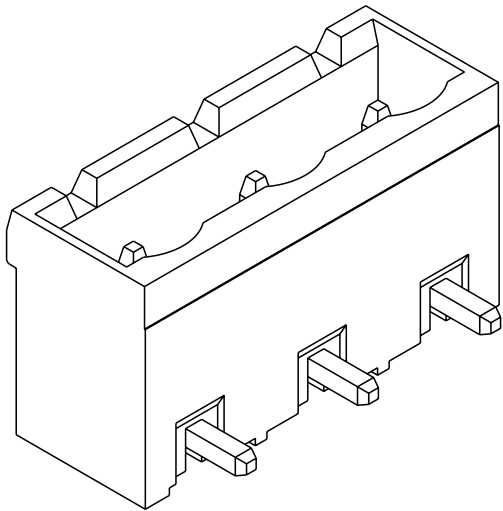

1776155-3 AS SHOWN

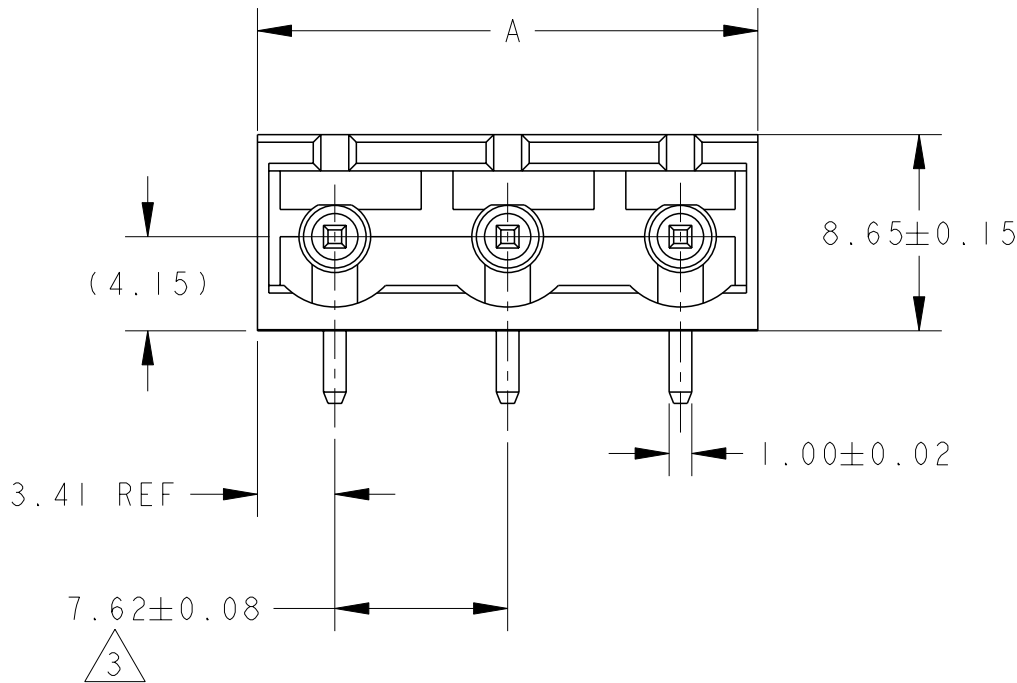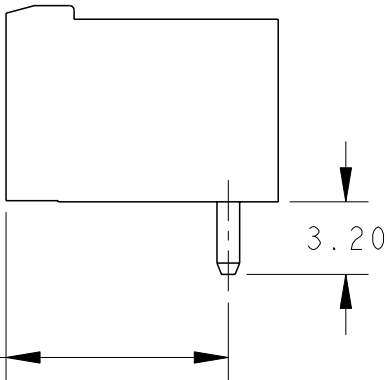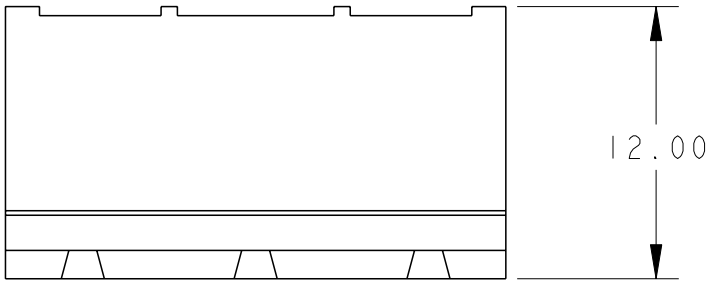

RECOMMENDED PC BOARD LAYOUT

44	TAPE AND REEL	22.06	3	5-1776155-3
X	BULK	90.64	12	1-1776155-2
		83.02	11	1-1776155-1
		75.40	10	1-1776155-0
		67.78	9	1776155-9
		60.16	8	1776155-8
		52.54	7	1776155-7
		44.92	6	1776155-6
		37.30	5	1776155-5
		29.68	4	1776155-4
		22.06	3	1776155-3
		14.44	2	1776155-2
TAPE WIDTH	PACKAGING	A	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S.WELDON 11JUL2005	TE Connectivity		
		CHK C.RICHARD 11JUL2005			
		APVD C.RICHARD 11JUL2005	NAME		
		PRODUCT SPEC 108-161088	TERMINAL BLOCK, PLUG 90 DEGREE		
		APPLICATION SPEC 114-20079	7.62mm PITCH		
		WEIGHT -	SIZE A3	CAGE CODE 00779	DRAWING NO C-1776155
		CUSTOMER DRAWING	SCALE 3:1	SHEET 1 OF 1	REV A

DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
	0 PLC	±	-
	1 PLC	±0.2	
	2 PLC	±0.25	
	3 PLC	±	-
	4 PLC	±	-
MATERIAL		FINISH	±2°