
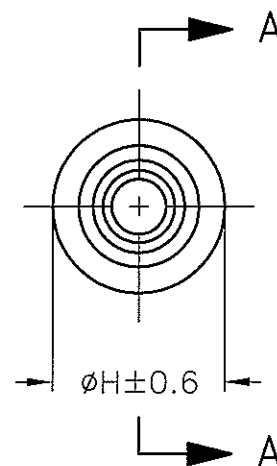


LOC	DIST	REVISIONS				DATE	DWN	APVD
J	—	P	LTR	DESCRIPTION				
			D2	REVISED PER ECO-11-005030		22MAR11	RK	HMR

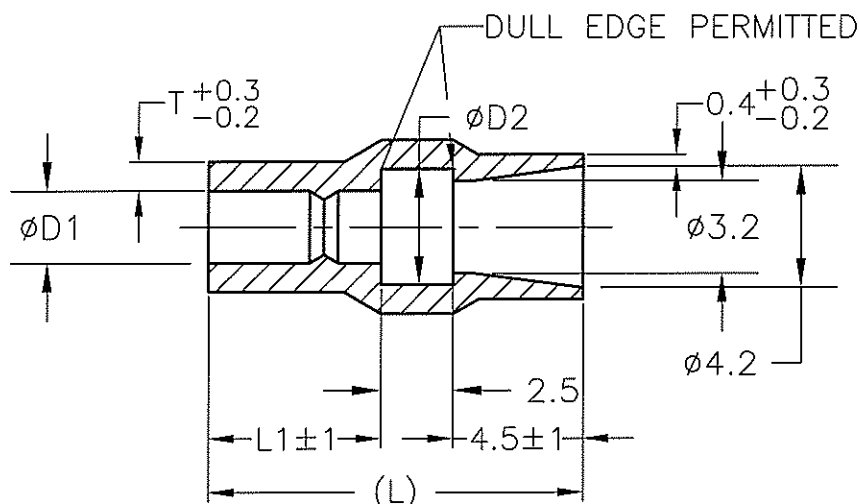

1. 材質: SS-108 (一般)
2. 一般公差: ± 0.5
3. 適用製品規格は無し

A - A

△ 品川商工発行のカタログと本図で寸法を優先する。

法が異なる場合は

1. MATERIAL: SS-108 (GENERAL)
 2. GENERAL TOLERANCE: ± 0.5
 3. APPLICABLE PRODUCT SPEC NOT AVAILABLE
- △ IN THE EVENT OF CONFLICT BETWEEN THE REQUIREMENTS OF THIS CUSTOMER DRAWING AND THE SHINAGAWA SHOKO CO LTD CATALOG THIS CUSTOMER DRAWING SHALL TAKE PRECEDENCE

△ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

△ OBSOLETE

CLEAR	14	7	4.5	1.5	0.6	5.9	224215	170887-5
	13	6		3.5	0.7		224235	170887-4
	14	7		3.2			224232	170887-3
BLACK	13	6	4	2.5	5.4	224225B	170887-2	
CLEAR						224225	170887-1	
COLOR	L	L1	φ D2	φ D1	T	H	SHINAGAWA SHOKO PN	PN

X-170892-X	SEE 170892
X-170893-X	SEE 170893
X-170889-X	SEE 170889
X-170888-X	SEE 170888
X-170890-X	SEE 170890
X-170891-X	SEE 170891
X-170823-X	SEE 170823
PN	REMARK

WIRE RANGE
抱合電線断面積INSULATION DIA
被覆外径DIMENSIONS:
単位: 耗
MM


DWN 31 AUG 00
A.YAMAGUCHI
CHK 31 AUG 00
D.MATSUURA
APVD 31 AUG 00
K.BETSUI

MATERIAL
材料FINISH
仕上TOLERANCES UNLESS
OTHERWISE SPECIFIED:
一般公差

0 PLC $\pm$ —
1 PLC $\pm$ —
2 PLC $\pm$ —
3 PLC $\pm$ —
4 PLC $\pm$ —
ANGLES $\pm$ —

PRODUCT SPEC
製品規格APPLICATION SPEC
取付適用規格

WEIGHT



TE

TE Connectivity

NAME
名称

CONNECT SLEEVE FOR
5DIA SERIES SHUR PLUG RECEPTACLE

SIZE

CAGE CODE

DRAWING NO
番号

RESTRICTED TO

A4

00779

C-170887

—

CUSTOMER DRAWING

SCALE
尺度 4:1

SHEET 1 OF 1

REV D2