


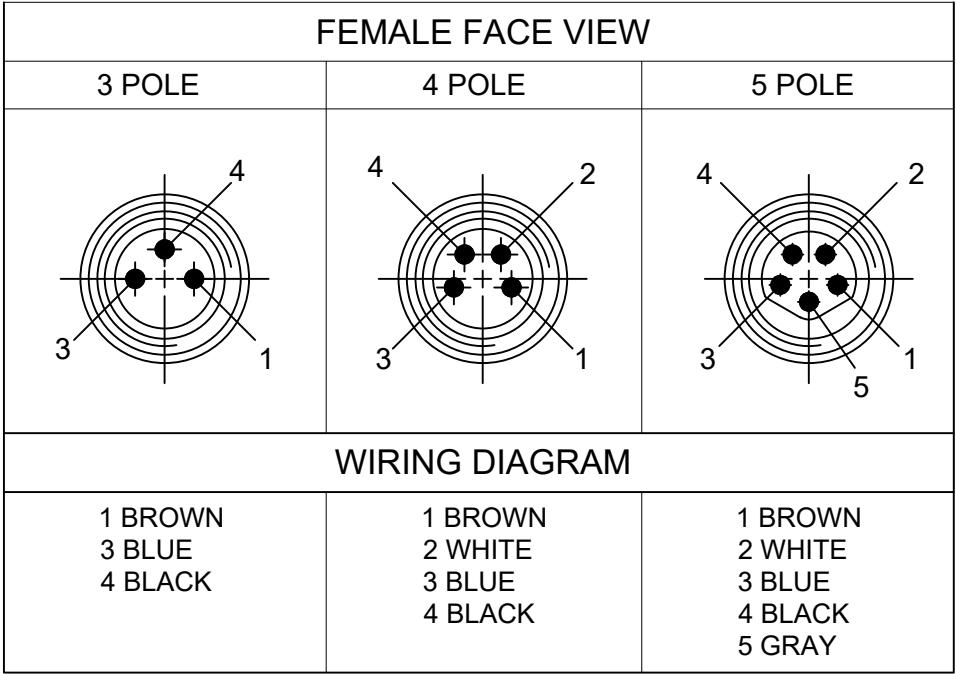

- NOTES:
1. MATERIAL: AS NOTED

2. FINISH: AS NOTED

3. ELECTRICAL:

VOLTAGE - 3P & 4P: 60V/AC 75V/DC
5P: 30V/AC 36V/DC

CURRENT - 3P & 4P: 4A
5P: 3A

4. TEMP RATING: -20°TO +105°C

5. PROTECTION: IP67 (WHEN MATED)

6. COUPLING THREAD: M8 X 1

7. UL LISTED FILE: E152210
CSA CERTIFIED FILE: LR6837

8. ALL DIMENSIONS ARE FOR REFERENCE
UNLESS TOLERANCED OR NOTED OTHERWISE

7	WRAP LABEL	VINYL	BLACK/WHITE
6	O-RING	VITON	RED
5	COUPLING NUT	BRASS	NICKEL PLATED
4	CONTACT SOCKET	COPPER ALLOY	GOLD PLATED
3	INSERT	PUR	BLACK
2	OVERMOLD	TPC	YELLOW
1	#24/3-5 CABLE	PVC	YELLOW
ITEM	DESCRIPTION	MATERIAL	FINISH

DOCUMENT STATUS

P1

RELEASE DATE

2025/09/10

12:55:40

