



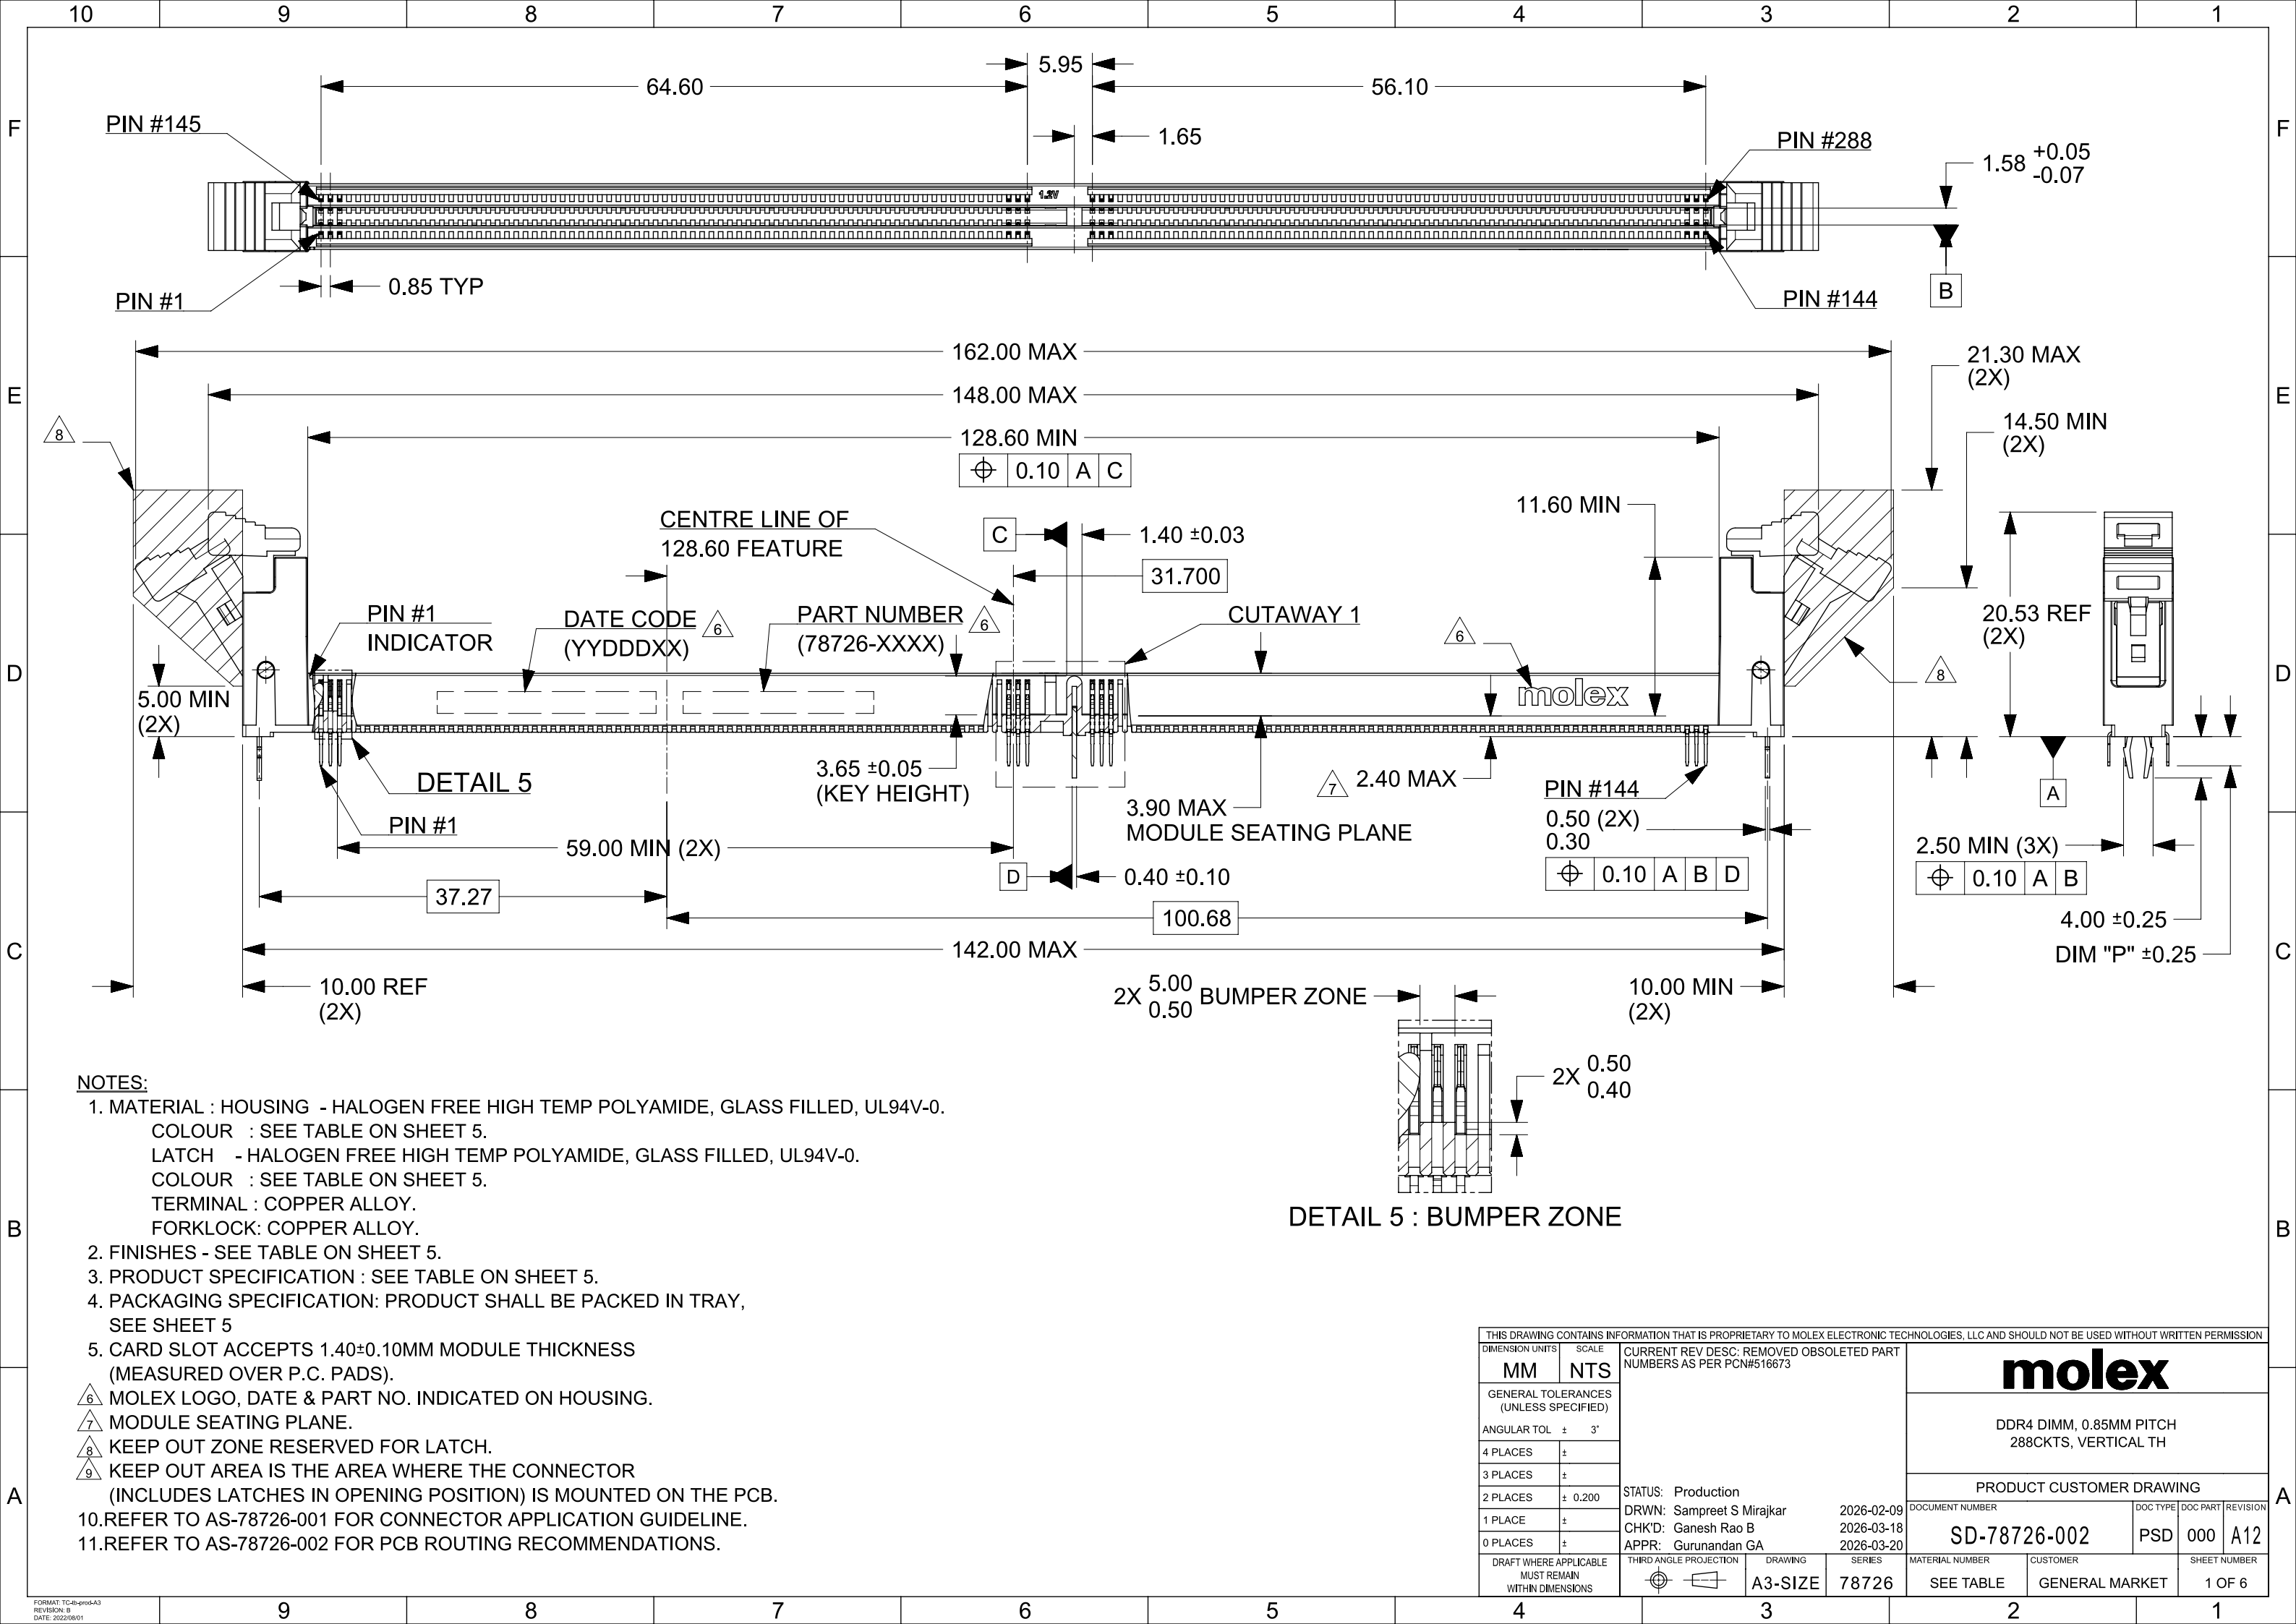

NOTES:

1. MATERIAL : HOUSING - HALOGEN FREE HIGH TEMP POLYAMIDE, GLASS FILLED, UL94V-0.
COLOUR : SEE TABLE ON SHEET 5.
LATCH - HALOGEN FREE HIGH TEMP POLYAMIDE, GLASS FILLED, UL94V-0.
COLOUR : SEE TABLE ON SHEET 5.
TERMINAL : COPPER ALLOY.
FORKLOCK: COPPER ALLOY.
2. FINISHES - SEE TABLE ON SHEET 5.
3. PRODUCT SPECIFICATION : SEE TABLE ON SHEET 5.
4. PACKAGING SPECIFICATION: PRODUCT SHALL BE PACKED IN TRAY, SEE SHEET 5
5. CARD SLOT ACCEPTS 1.40±0.10MM MODULE THICKNESS (MEASURED OVER P.C. PADS).
6. MOLEX LOGO, DATE & PART NO. INDICATED ON HOUSING.
7. MODULE SEATING PLANE.
8. KEEP OUT ZONE RESERVED FOR LATCH.
9. KEEP OUT AREA IS THE AREA WHERE THE CONNECTOR (INCLUDES LATCHES IN OPENING POSITION) IS MOUNTED ON THE PCB.
- 10.REFER TO AS-78726-001 FOR CONNECTOR APPLICATION GUIDELINE.
- 11.REFER TO AS-78726-002 FOR PCB ROUTING RECOMMENDATIONS.

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
DIMENSION UNITS		SCALE		CURRENT REV DESC: REMOVED OBSOLETE PART NUMBERS AS PER PCN#516673					
MM		NTS							
GENERAL TOLERANCES (UNLESS SPECIFIED)									
ANGULAR TOL ± 3°									
4 PLACES		±		STATUS: Production					
3 PLACES		±							
2 PLACES		± 0.200							
1 PLACE		±		DRWN: Sampreet S Mirajkar					

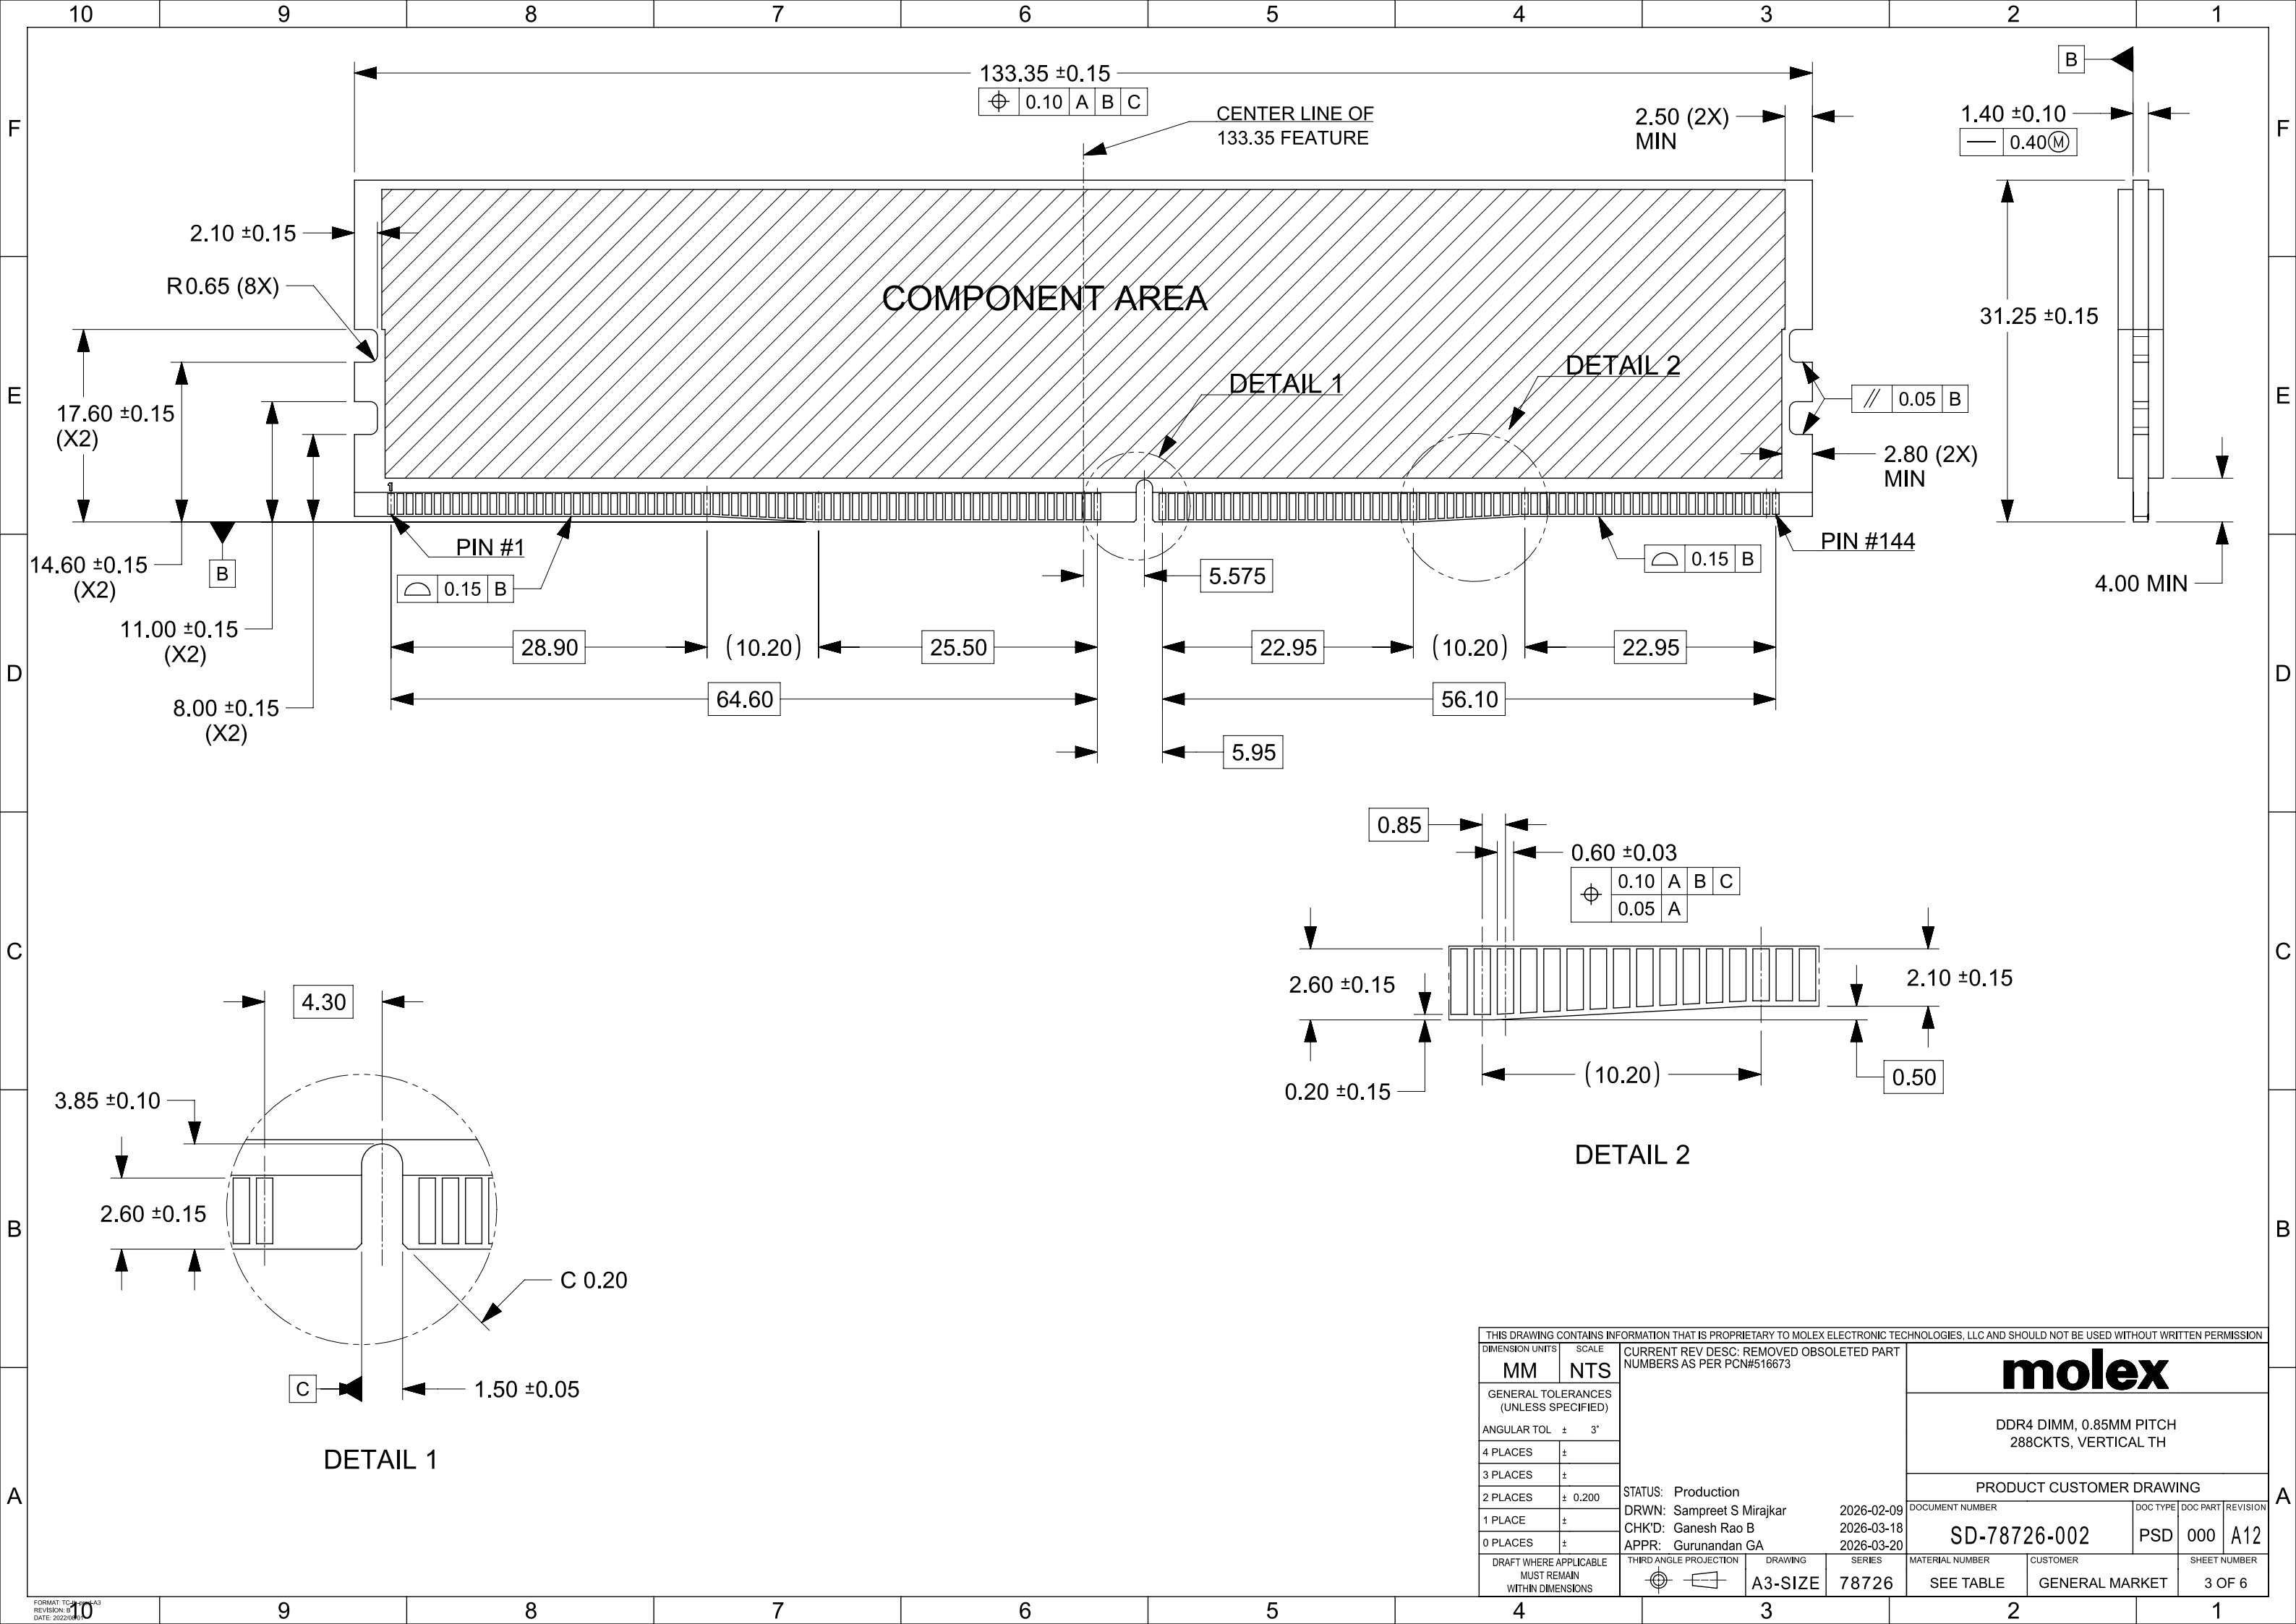

10	9	8	7	6	5	4	3	2	1																																			
<table><tr><th rowspan="2">CKT SIZE</th><th rowspan="2">ASSEMBLY PART NO.</th><th rowspan="2">HOUSING COLOR</th><th rowspan="2">LATCH COLOR</th><th rowspan="2">DIM "P"</th><th rowspan="2">RECOMMENDED PCB THICKNESS</th><th colspan="2">PLATING OPTION</th><th rowspan="2">PRODUCT SPEC. NO.</th><th rowspan="2">PACKAGING SPEC. NO.</th></tr><tr><th>TERMINAL</th><th>FORKLOCK</th></tr><tr><td rowspan="3">288</td><td>78726-1048</td><td>WHITE</td><td>WHITE</td><td>2.40</td><td>1.57</td><td>0.38 MICROMETER (15 MICROINCH) MIN GOLD ON CONTACT</td><td rowspan="3">1 MICROMETER (40 MICROINCH) MIN TIN OVERALL (PRE-PLATED)</td><td rowspan="3">PS-78726-002</td><td>PK-78726-001</td></tr><tr><td>78726-3012</td><td>BLACK</td><td>BLACK</td><td>2.67</td><td>1.57</td><td>2.54 MICROMETER (100 MICROINCH) MIN TIN ON SOLDERTAILS</td><td rowspan="2">787260003</td></tr><tr><td>78726-3020</td><td>BLUE</td><td>BLUE</td><td>2.67</td><td>1.57</td><td>1.27 MICROMETER (50 MICROINCH) MIN NICKEL UNDERPLATE</td></tr></table>										CKT SIZE	ASSEMBLY PART NO.	HOUSING COLOR	LATCH COLOR	DIM "P"	RECOMMENDED PCB THICKNESS	PLATING OPTION		PRODUCT SPEC. NO.	PACKAGING SPEC. NO.	TERMINAL	FORKLOCK	288	78726-1048	WHITE	WHITE	2.40	1.57	0.38 MICROMETER (15 MICROINCH) MIN GOLD ON CONTACT	1 MICROMETER (40 MICROINCH) MIN TIN OVERALL (PRE-PLATED)	PS-78726-002	PK-78726-001	78726-3012	BLACK	BLACK	2.67	1.57	2.54 MICROMETER (100 MICROINCH) MIN TIN ON SOLDERTAILS	787260003	78726-3020	BLUE	BLUE	2.67	1.57	1.27 MICROMETER (50 MICROINCH) MIN NICKEL UNDERPLATE
CKT SIZE	ASSEMBLY PART NO.	HOUSING COLOR	LATCH COLOR	DIM "P"	RECOMMENDED PCB THICKNESS	PLATING OPTION		PRODUCT SPEC. NO.	PACKAGING SPEC. NO.																																			
						TERMINAL	FORKLOCK																																					
288	78726-1048	WHITE	WHITE	2.40	1.57	0.38 MICROMETER (15 MICROINCH) MIN GOLD ON CONTACT	1 MICROMETER (40 MICROINCH) MIN TIN OVERALL (PRE-PLATED)	PS-78726-002	PK-78726-001																																			
	78726-3012	BLACK	BLACK	2.67	1.57	2.54 MICROMETER (100 MICROINCH) MIN TIN ON SOLDERTAILS			787260003																																			
	78726-3020	BLUE	BLUE	2.67	1.57	1.27 MICROMETER (50 MICROINCH) MIN NICKEL UNDERPLATE																																						