



REVISIONS					
P	LTR	DESCRIPTION	DATE	OWN	APVD
	B1	ECR-25-236038	21JUN2025	SY	DR

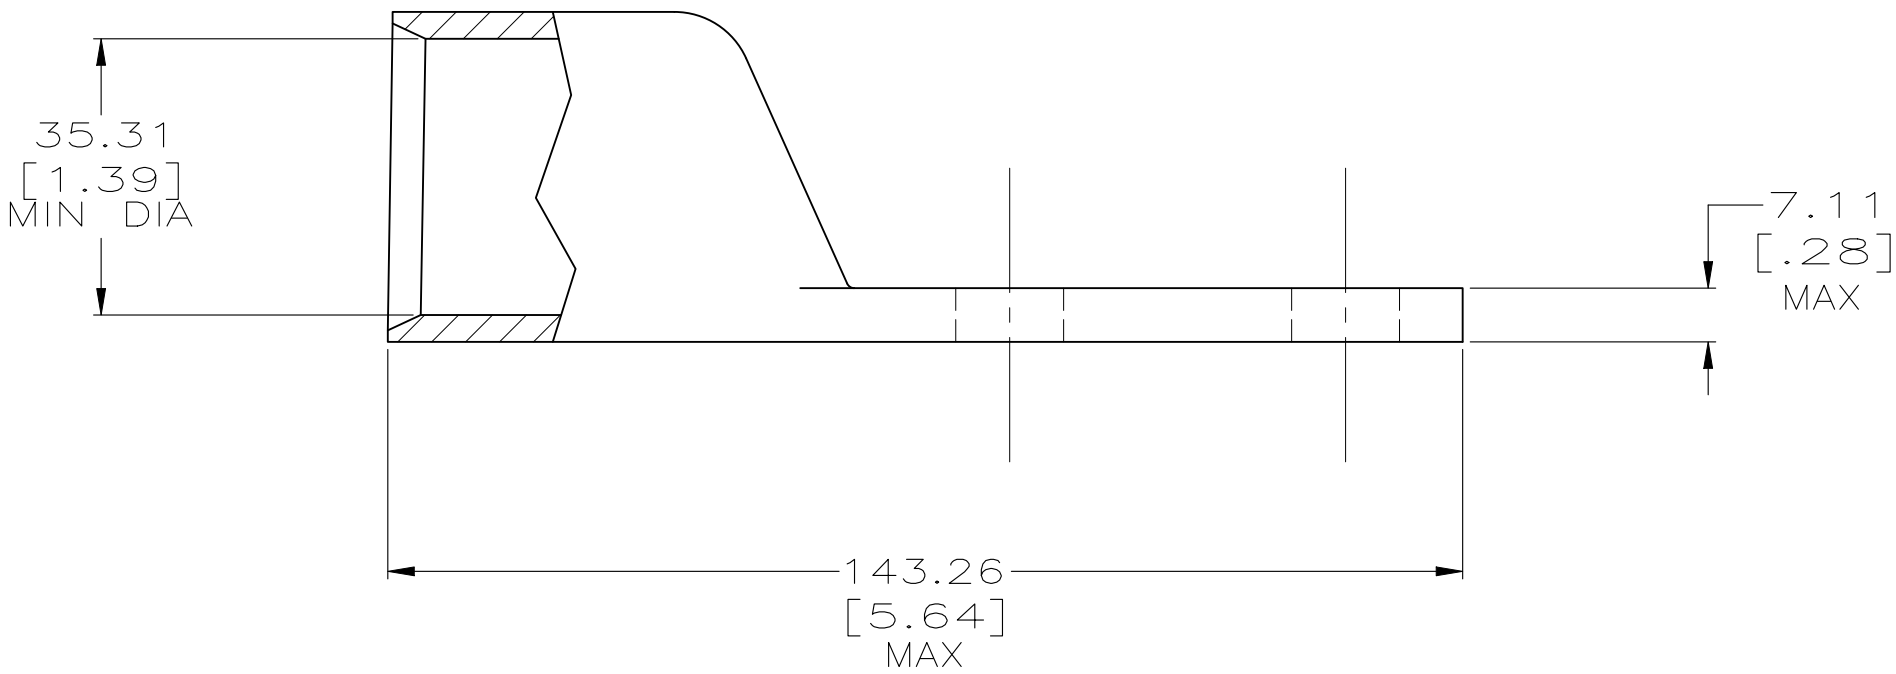

1 STAMP AMP 1000C 2750/24 APPROX AS SHOWN

AMP WIRE RANGE	E13288 Listed	LR7189 Certified	MILITARY P/N AND CLASS
525.7mm² [1000] MCM STRANDED	525.7mm² [1000] MCM STRANDED	525.7mm² [1000] MCM STRANDED	NOT APPLICABLE

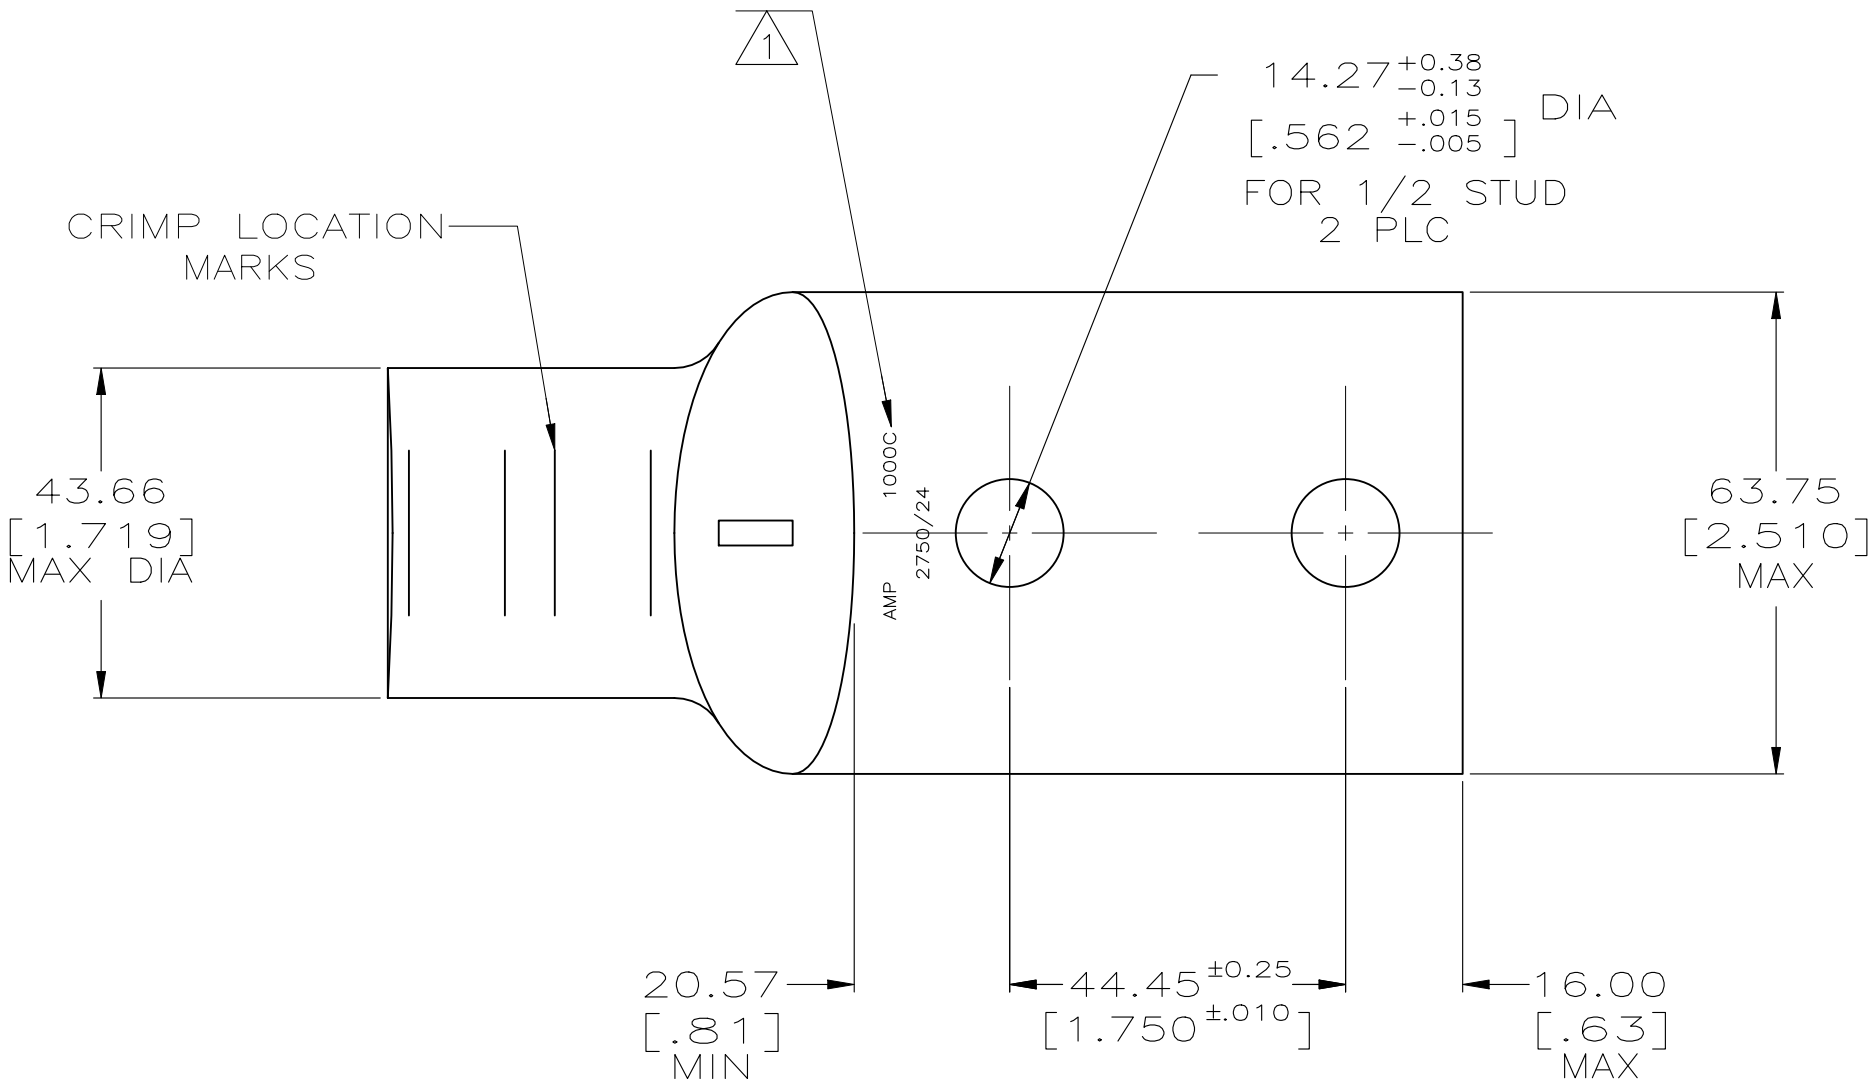

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: 170°C MAX
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: -
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	CIRCULAR MIL AREA: 950 - 1125 MCM STRANDED
FOR ORDER ENTRY	1-800-526-5142	THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

OBSOLETE	-	327294-3
	0.00254 [.000100] MIN TIN PER ASTM B545	327294
	FINISH	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DK SCHRUM 10/19/90	TE Connectivity			
DIMENSIONS: mm[INCHES]		CHK AJ KAUFMAN 8/17/92				
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME			
	0 PLC ± - 1 PLC ± - 2 PLC ± 0.20[.008] 3 PLC ± - 4 PLC ± - ANGLES ± -		TERMINAL, RECTANGULAR TONGUE, AMPOWER™			
	SEE TABLE		SIZE CAGE CODE DRAWING NO			
MATERIAL COPPER ASTM B-75 ANNEALED		FINISH	WEIGHT 1.11 lbs	A2 00779 C-327294		RESTRICTED TO -
CUSTOMER DRAWING			SCALE 1:1	SHEET 1 OF 1	REV B1	