

REVISIONS					
P	LTR	DESCRIPTION	DATE	OWN	APVD
	D1	ECR-25-236013	05APR2026	ABS	DR



METRIC

DIMENSIONS LISTED IN mm [INCHES]

AMP WIRE RANGE	 E13288 Listed
16-14 AWG STRANDED	16-14 AWG STRANDED


 LR7189 Certified	MILITARY P/N AND CLASS
NOT CERTIFIED	NOT APPLICABLE

 STAMP AMP 16-14* APPROX AS SHOWN

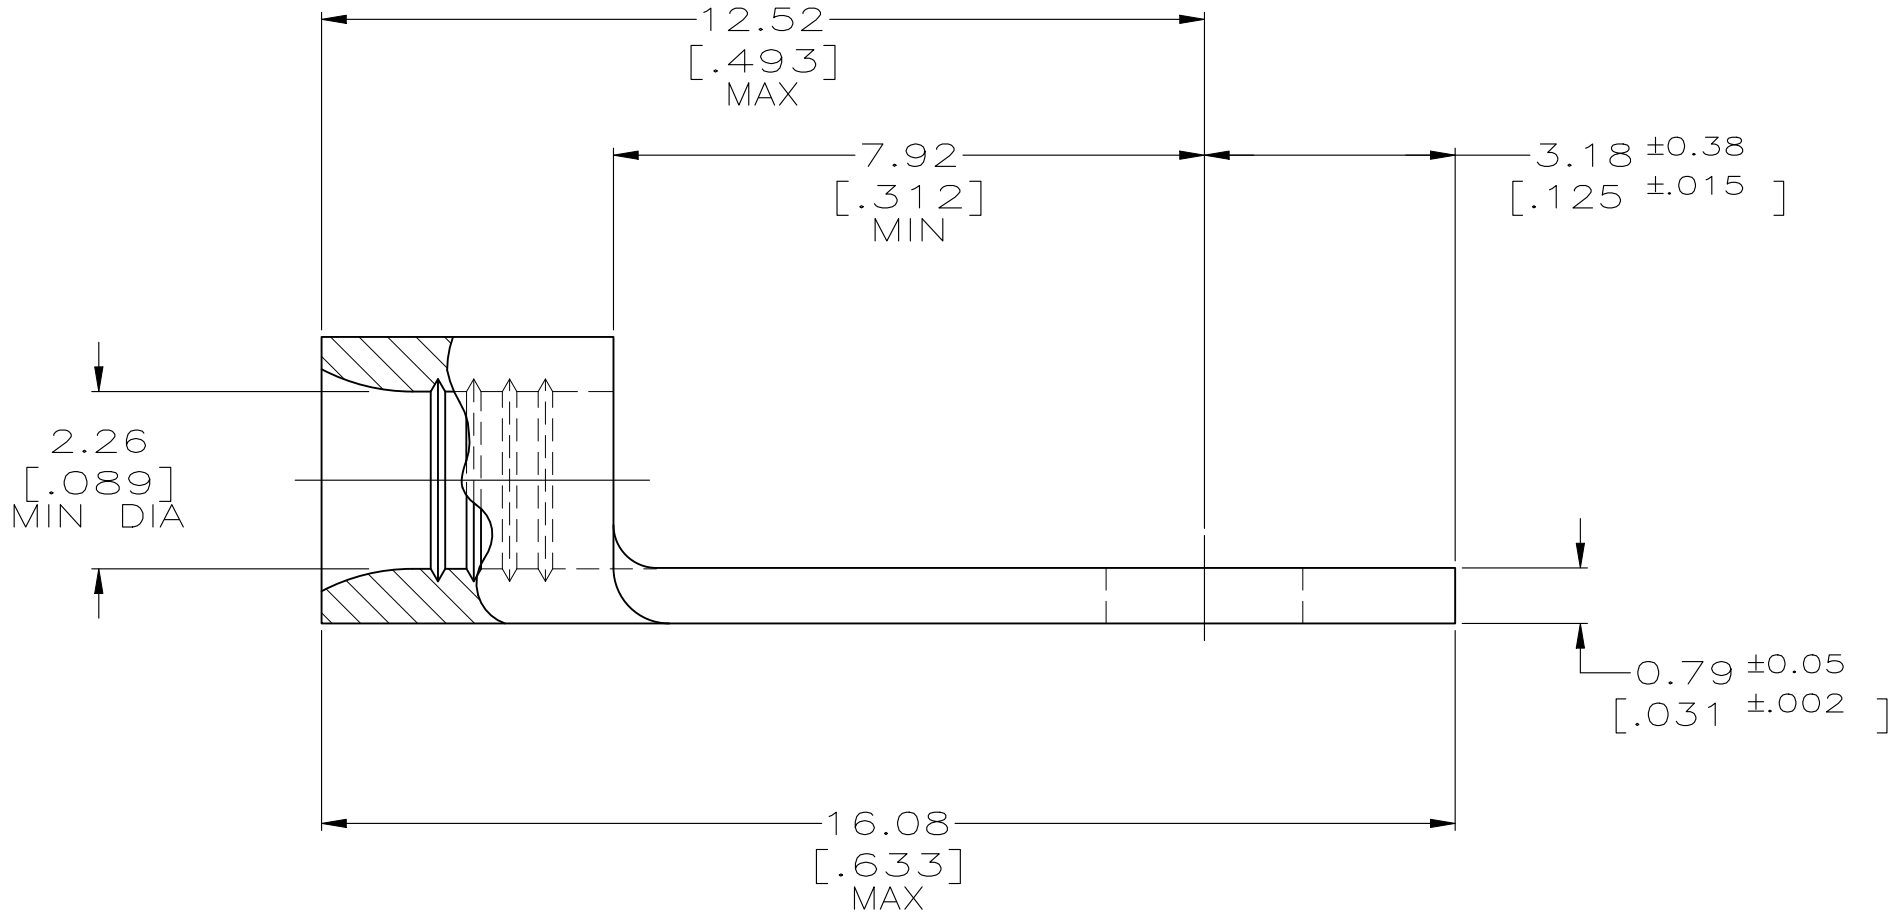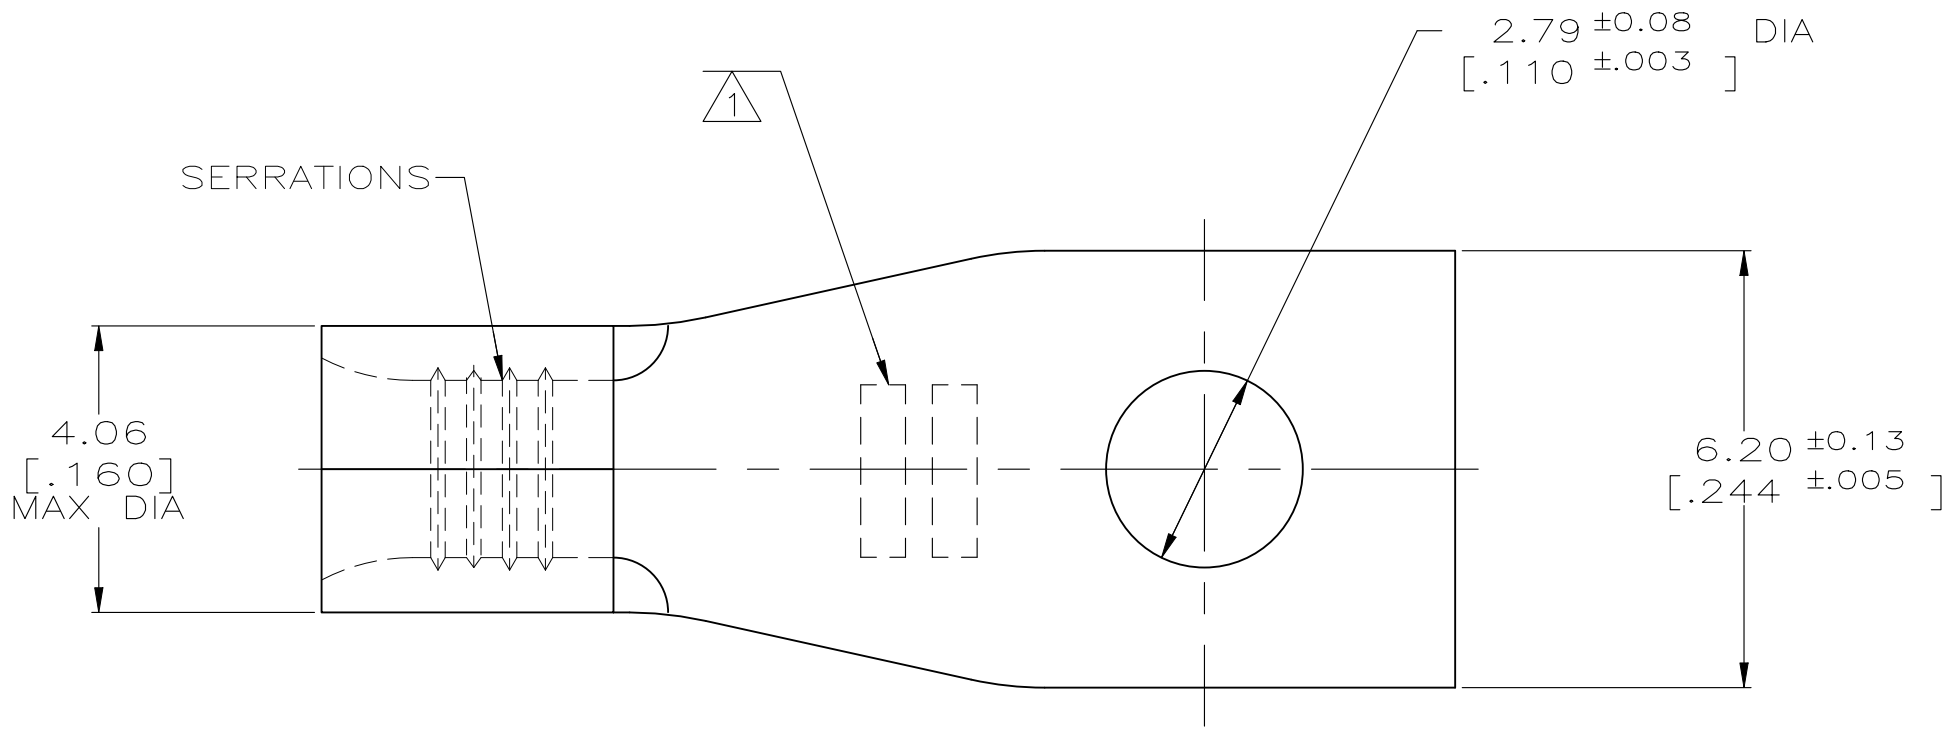

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: 170° C MAX
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: NOT APPLICABLE
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	WIRE CROSS SECTIONAL AREA RANGE: 1.04-2.62mm ² [2,050-5,180] CIR MILS STRANDED
FOR ORDER ENTRY	1-800-526-5142	THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

OBSOLETE	5000	ON TAPE, REEL	2-35129-1
	-	LOOSE PIECE	35129
	QTY	PACKAGE TYPE	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DK_SCHRUM 05JUL94	 TE Connectivity			
DIMENSIONS: mm [INCHES]		CHK DA PATTERSON 08AUG94				
		APVD CH KULYNYCH 08AUG94	NAME			
		PRODUCT SPEC	TERMINAL, RECTANGULAR TONGUE, BUDGET			
MATERIAL		FINISH	WEIGHT	SIZE	CAGE CODE	DRAWING NO
COPPER PER ASTM B-152 ANNEALED		TIN PLATE 0.00254[.000100] MIN THK PER MIL-I-10727	-	A2	00779	C-35129
CUSTOMER DRAWING			SCALE	SHEET	REV	RESTRICTED TO
			10:1	1 OF 1	D1	-