





LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AF	50		C1	ECR-13-017177	05NOV13	PKS	RRP

D

C

B

A

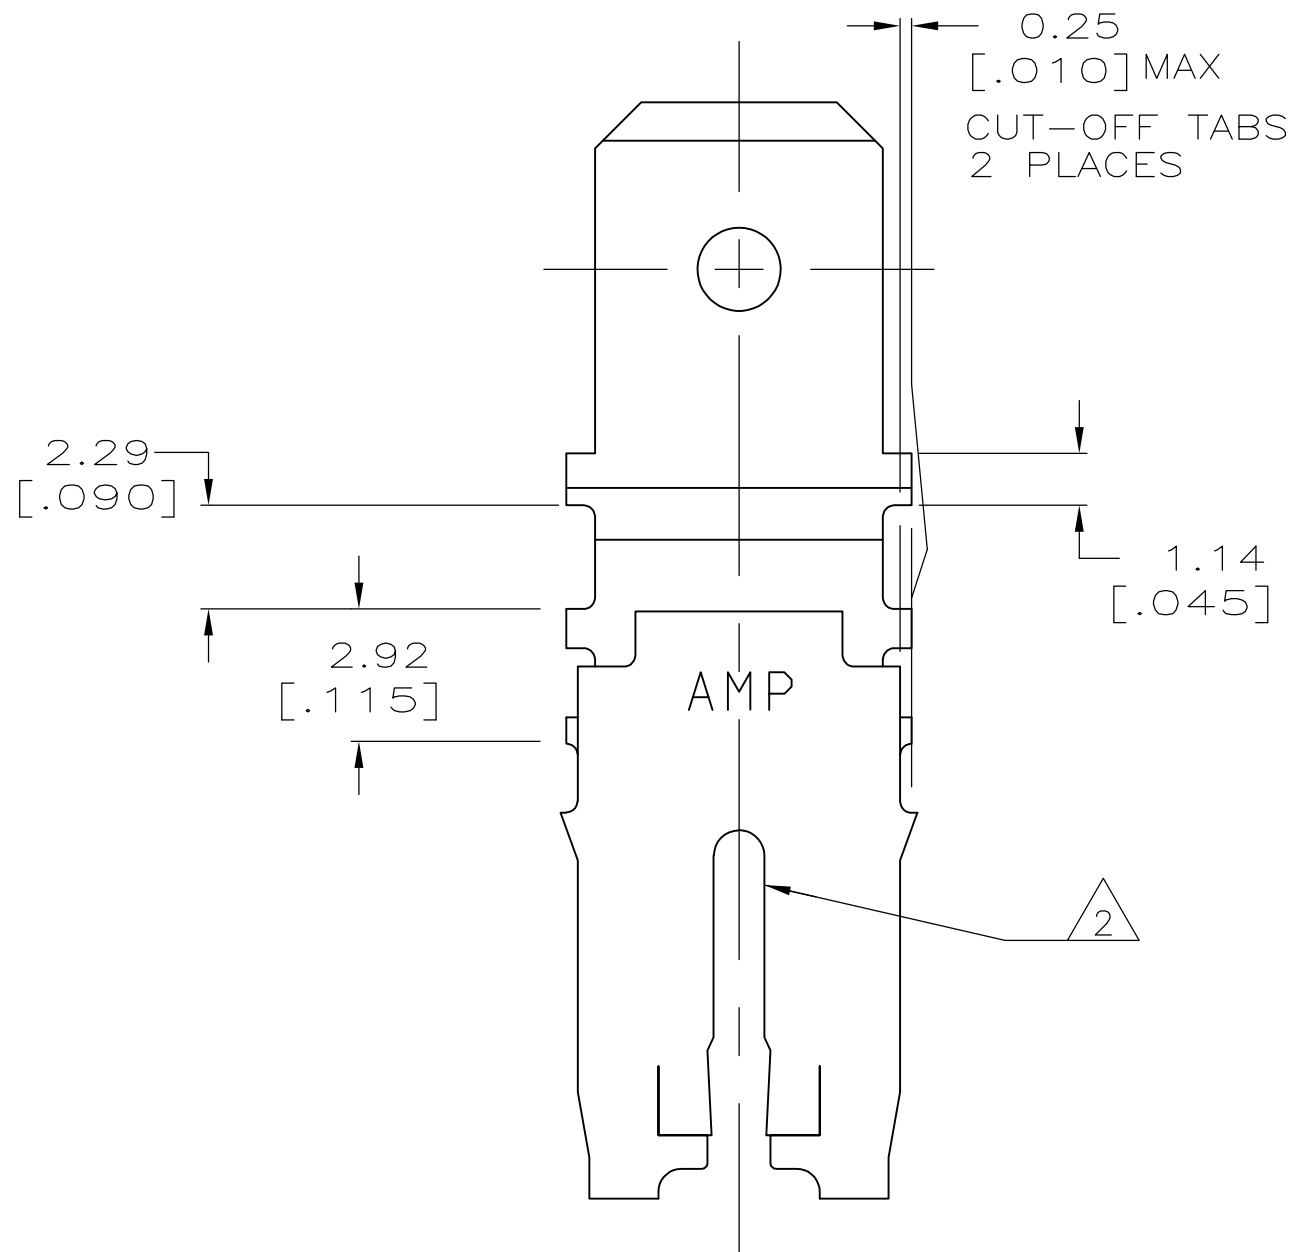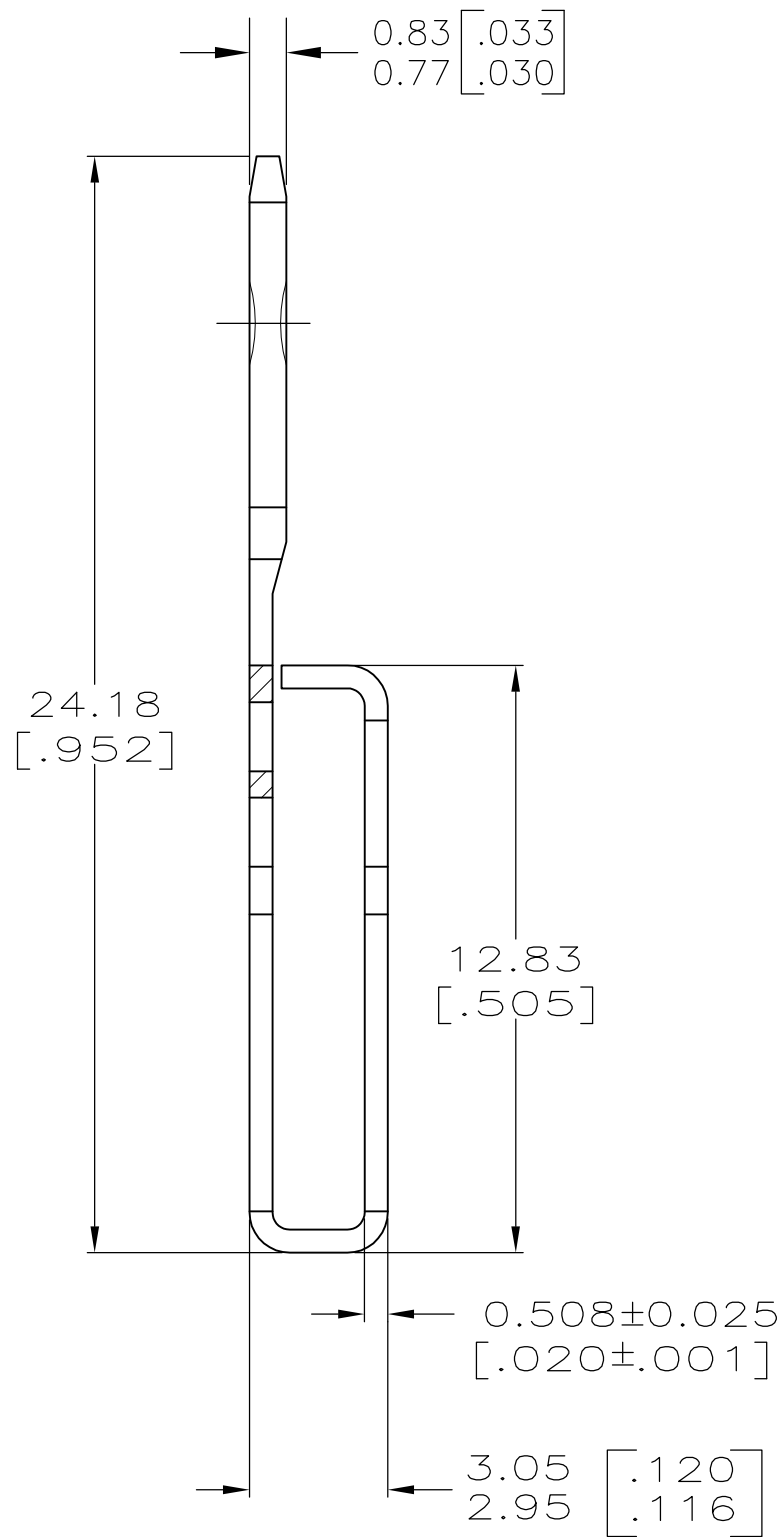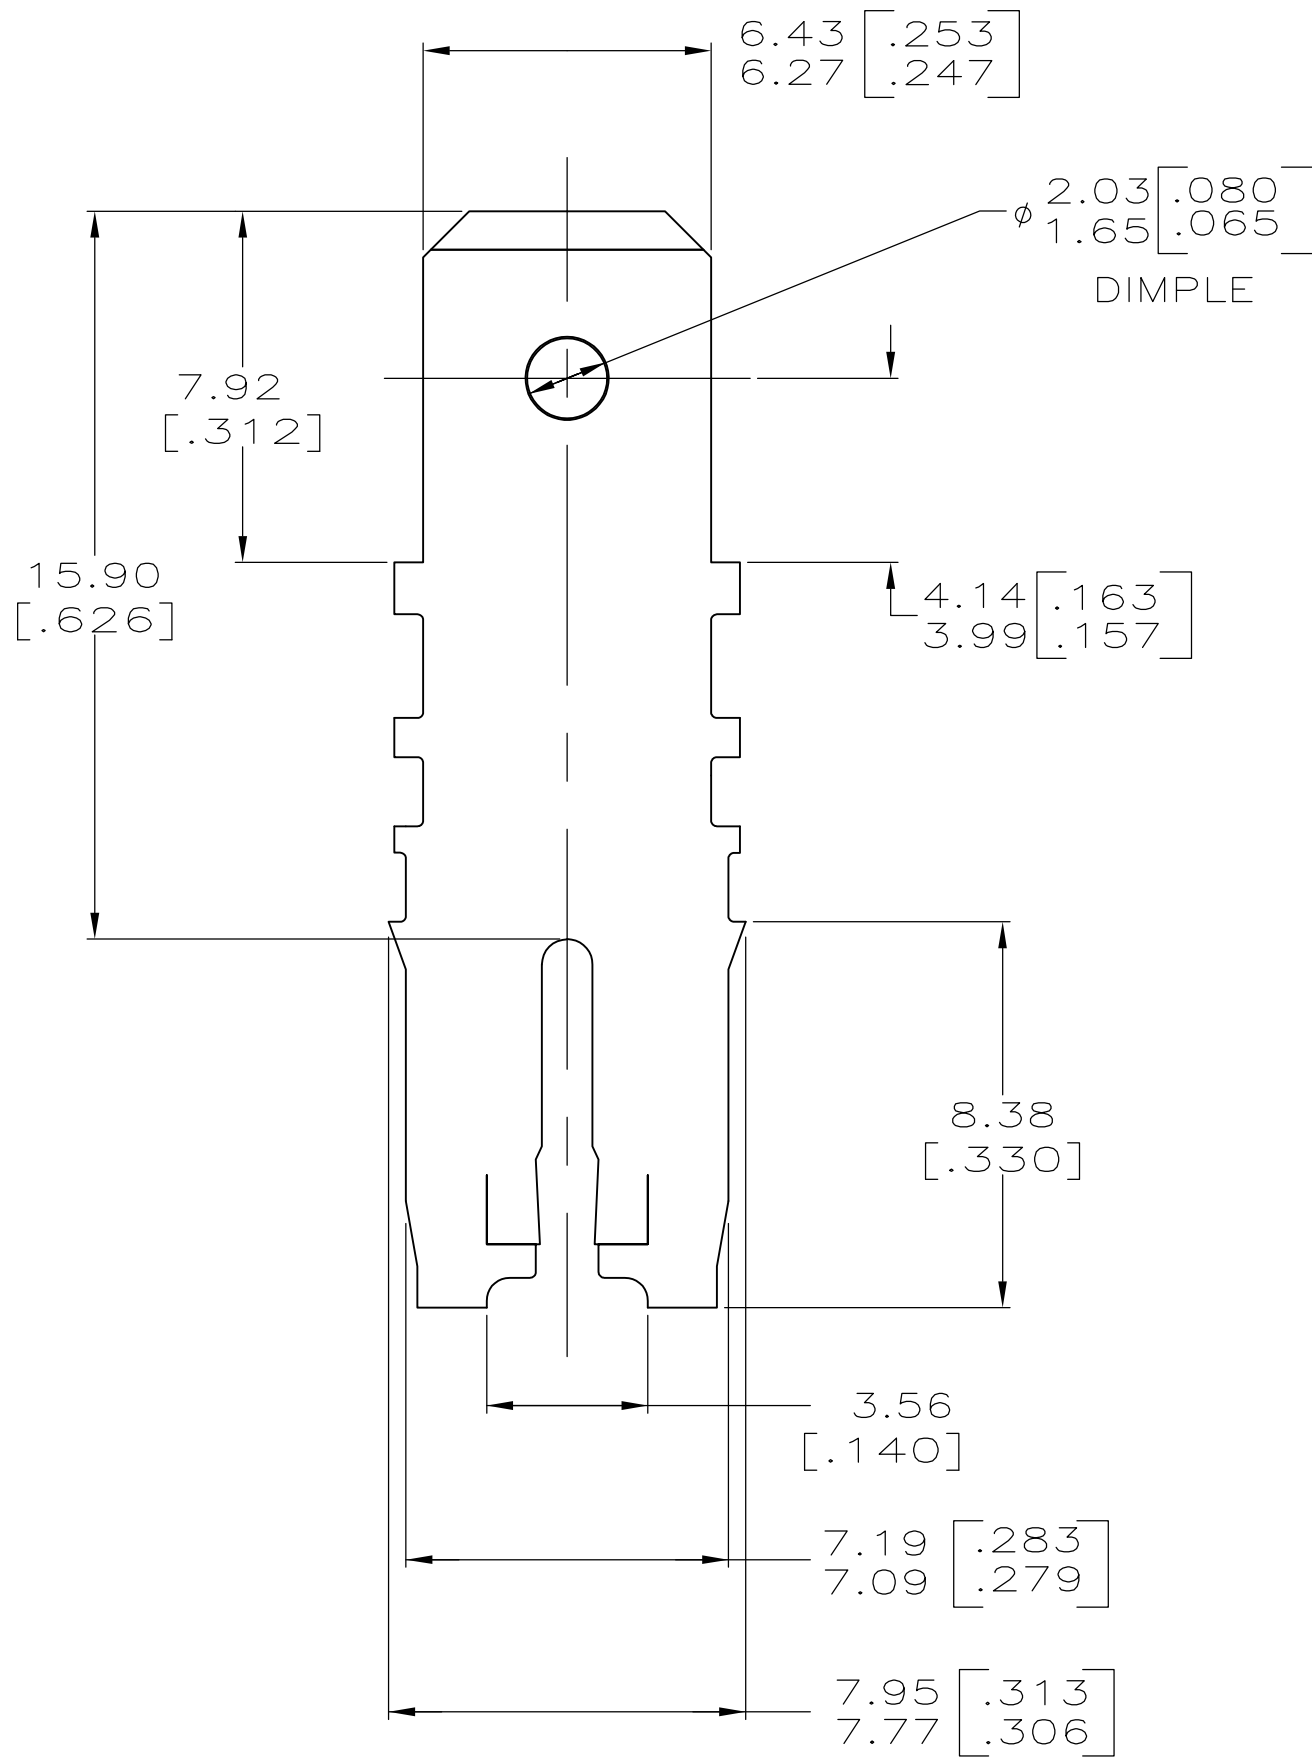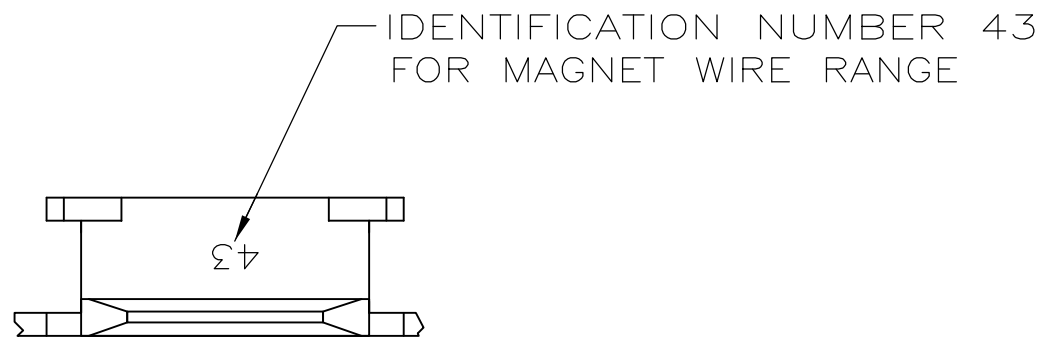

- 1 VARNISH RESIST OVER 0.002032[.000080] MIN TIN PER MIL-T-10727
- 2 SLOT ACCEPTS 1.61-1.83mm [#14-#13] AWG COPPER MAGNET WIRE. TWO 1.61mm [#14] AWG COPPER MAGNET WIRES ACCEPTABLE AT CAVITY ANVIL HEIGHT OF 3.94-4.19 [.155-.165].
- 3 AFTER INSERTION INTO PLASTIC HOLDER MAG-MATE MUST BE POTTED-IN TO PREVENT PULL-OUT WHEN MATING RECEPTACLE IS DISCONNECTED.

D

C

B

A

63883

63883-1
PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R.GRZYBOWSKI 24/OCT/95	TE Connectivity			
DIMENSIONS: INCHES		CHK M.S. FEHER 24/OCT/95				
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME			
	0 PLC ± -		APVD NELSON E. NEFF 24/OCT/95			
	1 PLC ± -		PRODUCT SPEC			
	2 PLC ± 0.25 [.010]		APPLICATION SPEC			
MATERIAL BRASS		FINISH 1	SIZE A2		CAGE CODE 00779	DRAWING NO C-63883
			WEIGHT -		RESTRICTED TO -	
			CUSTOMER DRAWING		SCALE 6:1	SHEET 1 OF 1
					REV C1	