

P	LTR	DESCRIPTION	DATE	DWN	APVD
	J2	REVISED PER ECR-20-005023	24APR2020	BDA	SW
	J3	REVISED PER ECR-20-100305	13AUG2020	PJ	VS
	K	REVISED PER ECR-20-100490	30SEP2020	PC	SW





1 APPLICABLE HOUSING : CAP AND PLUG

2 SELECTIVE GOLD PLATED AREA "C"
0.0004mm MIN THICK OVER Ni PLATE
ON INSIDE SURFACE.


4 MATING PART NUMBERS:
170359, 170360, 170363, 170364.

5 WIRE RANGE: 18-22 AWG, 2X 22AWG.

6 INSULATION DIA: 1.5-2.4mm,
3.4mm MAX FOR TWO WIRE CRIMP.

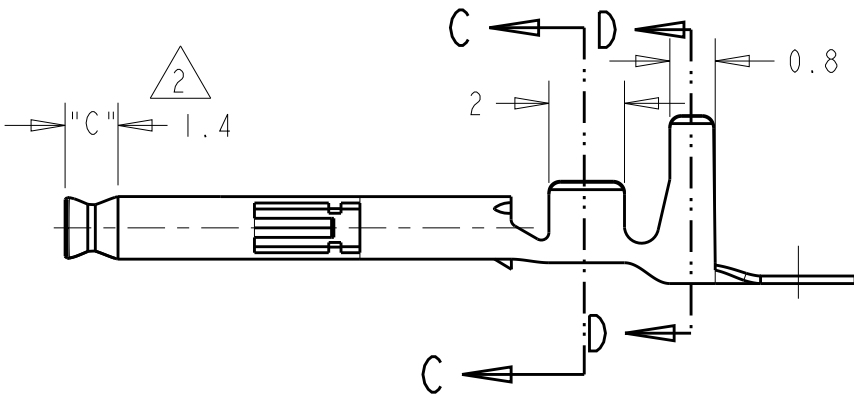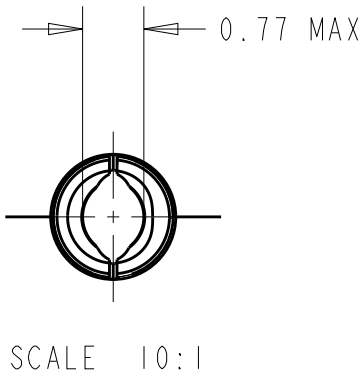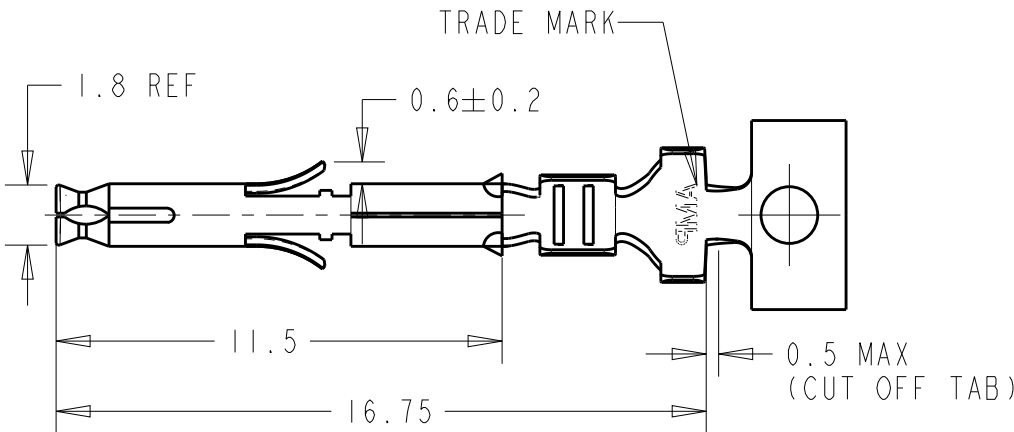


SECTION C-C
SCALE 10:1

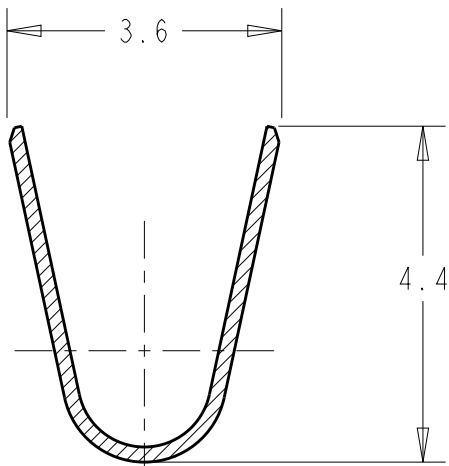

SECTION D-D
SCALE 10:1

170366-4	PRE-TIN	PHOZ.BRONZ	170362-4
170366-3	2	BRASS	170362-3
170366-1	PRE-TIN	BRASS	170362-1
LOOSE PIECE PART NUMBER	FINISH	MATERIAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN N. YAMASAKI 28FEB1994	 TE Connectivity	
DIMENSIONS: mm		CHK M. SHINDO 28FEB1994		
		APVD Y. KASHIWA 4MAR1994		
		PRODUCT SPEC 108-5138		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC 114-5050	NAME MINI UNIVERSAL M-N-L SOCKET CONTACT	
0 PLC ±0.3 1 PLC ±0.3 2 PLC ±0.3 3 PLC ± 4 PLC ± ANGLES ±3°		WEIGHT -	SIZE A3	CAGE CODE 00779
MATERIAL SEE TABLE		CUSTOMER DRAWING	DRAWING NO C-170362	RESTRICTED TO -
FINISH SEE TABLE		SCALE 5:1	SHEET 1 OF 1	REV K