



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	R	REVISED PER ECR-25-265843	14APR2026	DK	JP


D

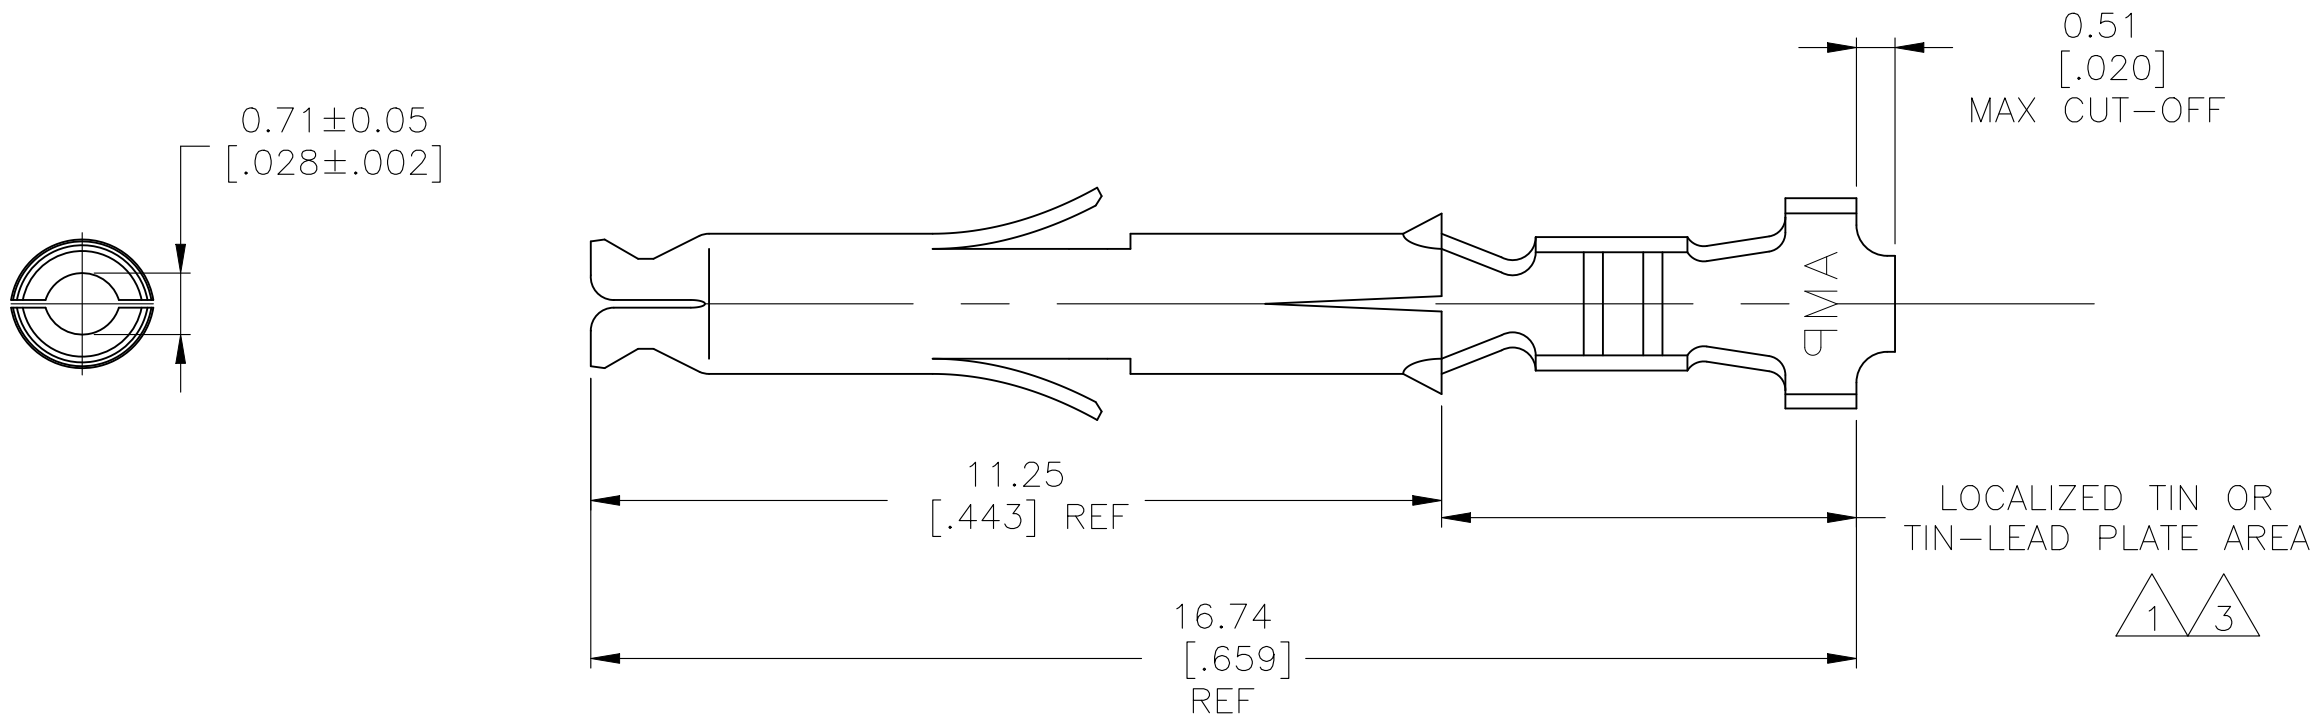


C

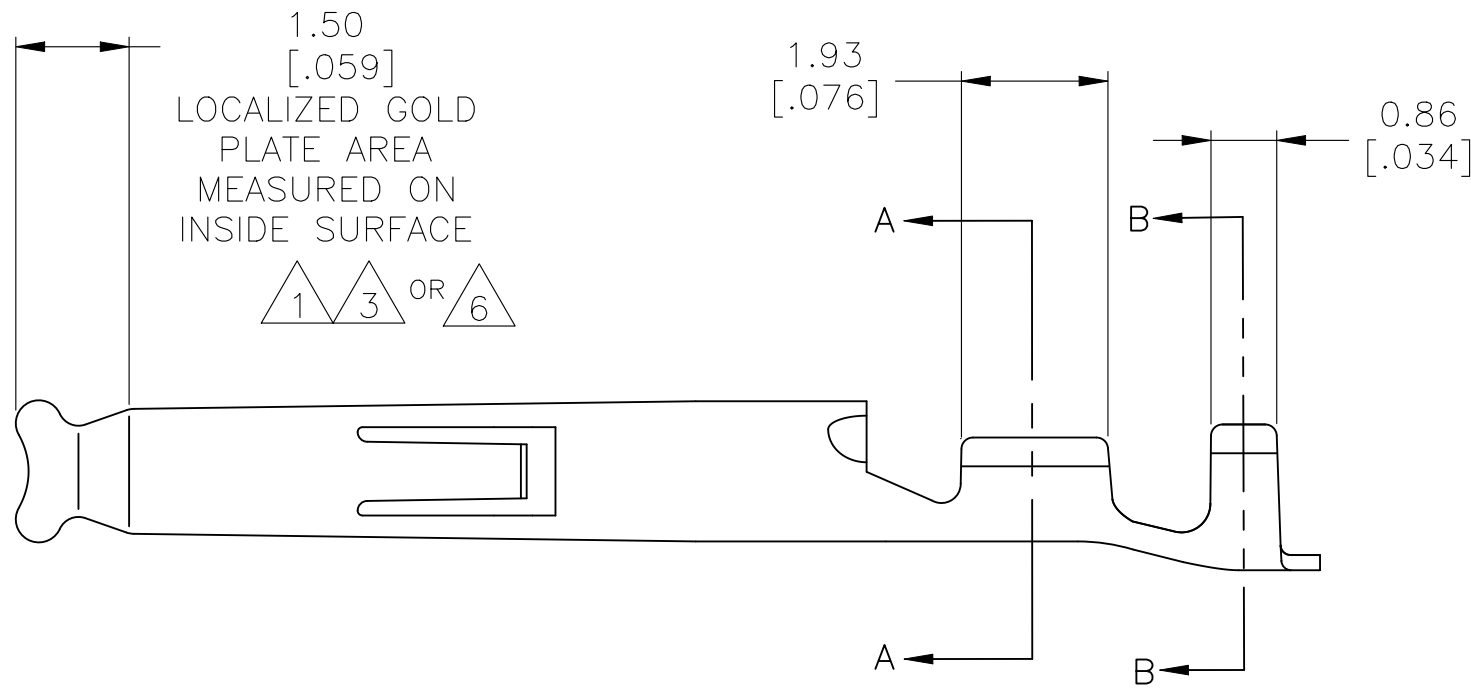

B

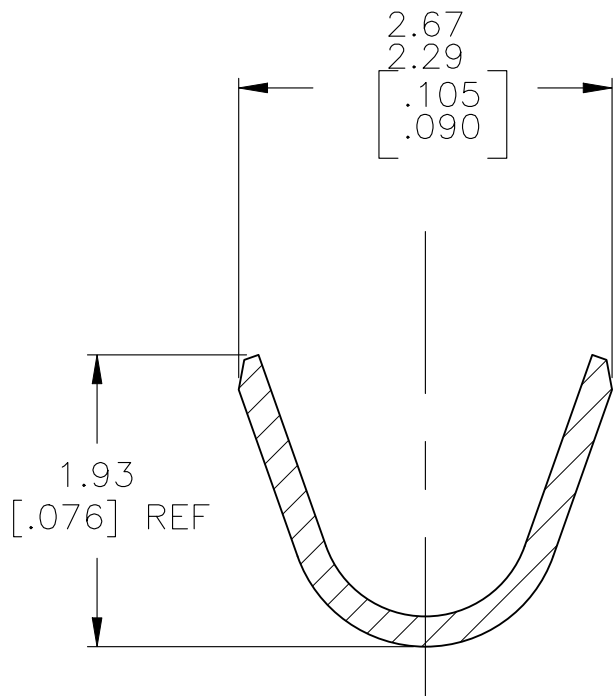

SECTION B-B
SCALE 20:1

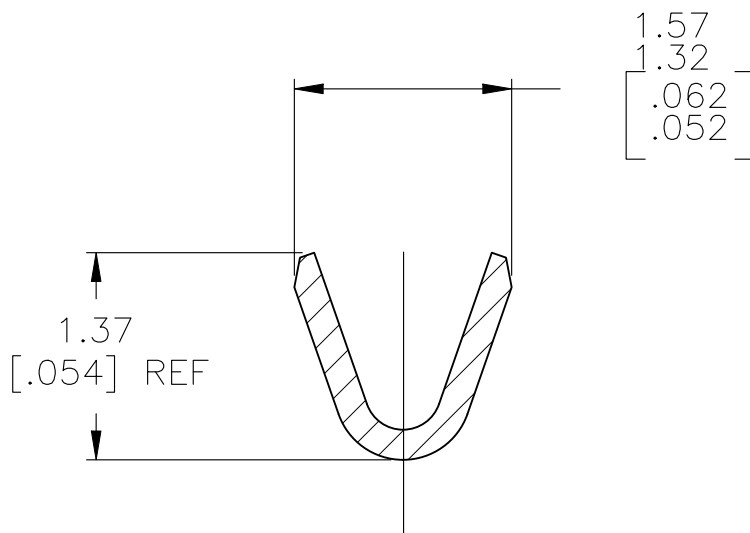

SECTION A-A
SCALE 20:1

- 0.00076 [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA AND 0.00254 [.000100] MIN BRIGHT TIN-LEAD IN LOCALIZED TIN-LEAD PLATE AREA OVER 0.0013 [.000050] MIN NICKEL.
- WIRE RANGE: 0.05-0.15 mm² (30-26 AWG)
- 0.00076 [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA AND 0.00254 [.000100] MIN MATTE TIN IN LOCALIZED TIN PLATE AREA OVER .00130 [.000050] MIN NICKEL.
- SUPERSEDED BY 1-770834-1
- INSULATION RANGE: .889-1.27 mm [.035-.05 in]
- 0.00130 [0.000050] MIN THK NICKEL OVERALL , AND 0.00254 [.000100] MIN THK MATTE TIN IN LOCALIZED TIN PLATE AREA, AND 0.00076 [0.000030] MIN THK GOLD OR 0.00008 [0.000003] GOLD FLASH OVER 0.00068 [0.000027] MIN THK PdNi STRIPES PER TE CONNECTIVITY'S DISCRETION IN LOCALIZED GOLD PLATE AREA.

3	0.20 [.008] PH BRZ	1-770834-1
6	0.20 [.008] BRASS	1-770834-0
1	0.20 [.008] PH BRZ	770834-6
PRE-TIN	0.20 [.008] PH BRZ	770834-4
1	0.20 [.008] BRASS	770834-3
PRE-TIN	0.20 [.008] BRASS	770834-1
FINISH	MATERIAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. HOOVER 17OCT02	TE Connectivity			
DIMENSIONS: mm [INCHES]		CHK C. JONES 17OCT02				
		APVD C. JONES 17OCT02	NAME			
		PRODUCT SPEC	SOCKET, MINI UNIVERSAL MATE-N-LOK(TM)			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.15 [.006] 4 PLC ± - ANGLES ± 1°		-	A2	00779	C-770834	-
MATERIAL -		FINISH -	WEIGHT	0.000000	SCALE	10:1
			CUSTOMER DRAWING	10:1	SHEET	1 OF 1
					REV	R