
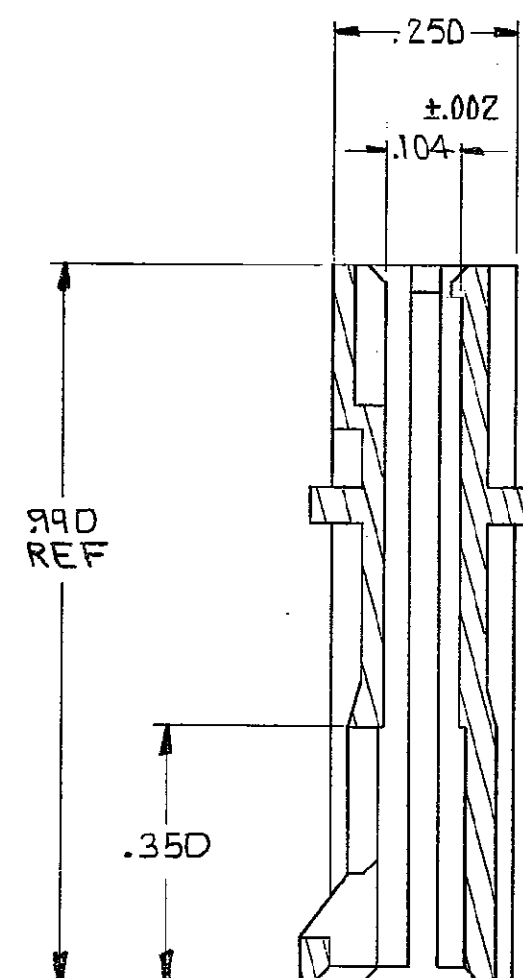




THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION

© COPYRIGHT


| REVISIONS |   |      |     |                           |  | DATE    | APPROVED |
|-----------|---|------|-----|---------------------------|--|---------|----------|
| P         | F | ZONE | LTR | DESCRIPTION               |  |         |          |
|           |   | G2   |     | REVISED PER ECO-11-005140 |  | 30MAR11 | HMR      |

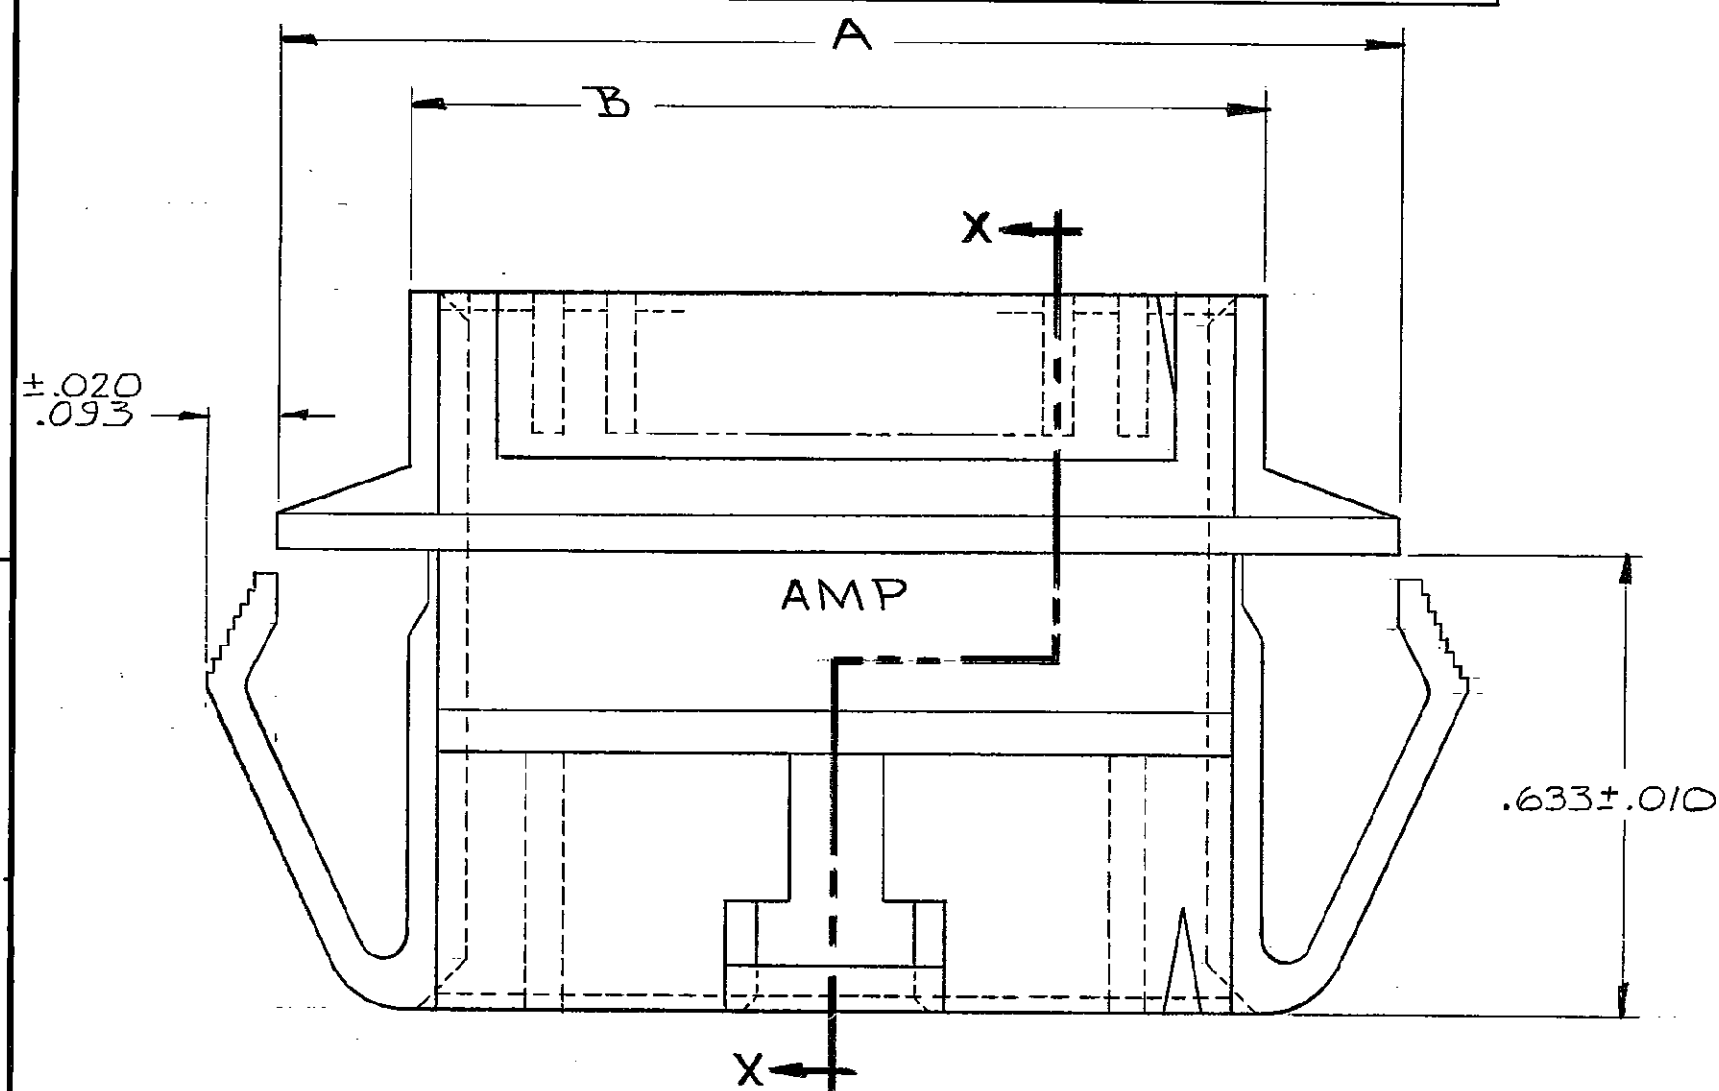


SECTION X-X

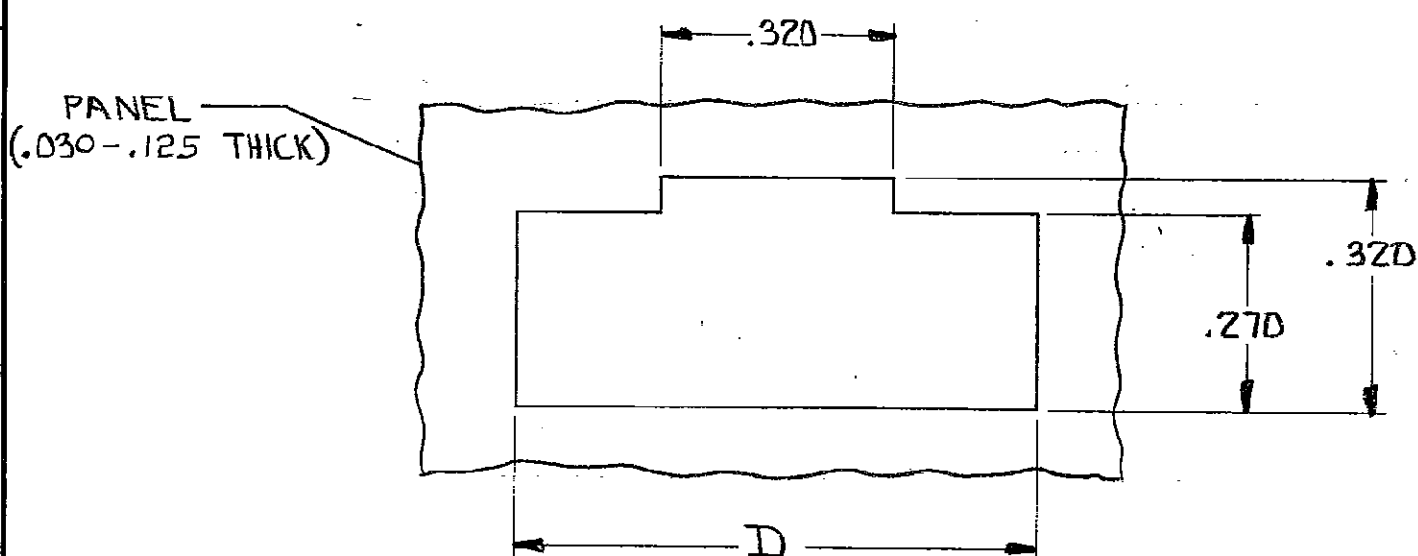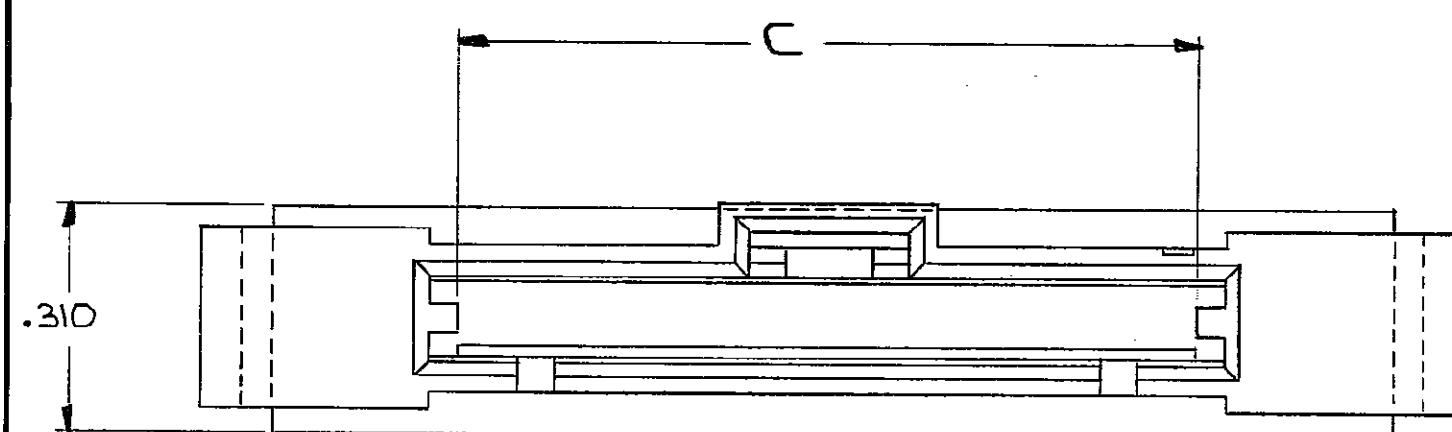

RECOMMENDED PANEL CUTOUT

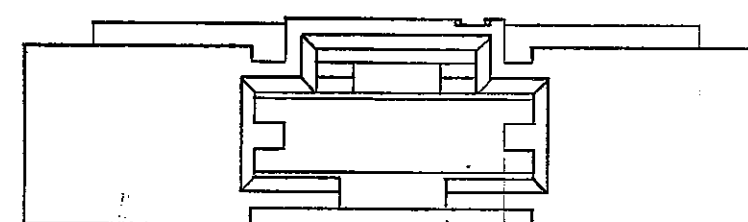

DETAIL FOR -2 ONLY (3 POSITION)

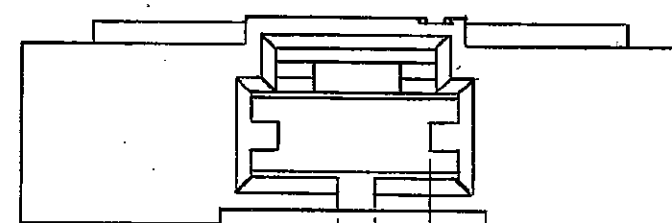

DETAIL FOR -1 ONLY (2 POSITION)

- SHROUD ACCEPTS RIBBED PIN ASSEMBLIES
- SHROUD MATES WITH LATCHING RECEPTACLE ASSEMBLIES
- 3 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

|            |       |       |       |       |    |            |
|------------|-------|-------|-------|-------|----|------------|
| 3 OBSOLETE | 2.925 | 2.505 | 2.665 | 3.035 | 25 | 2-103682-4 |
|            | 2.825 | 2.405 | 2.565 | 2.935 | 24 | 2- -3      |
| OBSOLETE   | 2.725 | 2.305 | 2.465 | 2.835 | 23 | 2- -2      |
| 3          | 2.625 | 2.205 | 2.365 | 2.735 | 22 | 2- -1      |
|            | 2.525 | 2.105 | 2.265 | 2.635 | 21 | 2- -0      |
|            | 2.425 | 2.005 | 2.165 | 2.535 | 20 | 1- -9      |
|            | 2.325 | 1.905 | 2.065 | 2.435 | 19 | 1- -8      |
| OBSOLETE   | 2.225 | 1.805 | 1.965 | 2.335 | 18 | 1- -7      |
| 3          | 2.125 | 1.705 | 1.865 | 2.235 | 17 | 1- -6      |
|            | 2.025 | 1.605 | 1.765 | 2.135 | 16 | 1- -5      |
| 3 OBSOLETE | 1.925 | 1.505 | 1.665 | 2.035 | 15 | 1- -4      |
|            | 1.825 | 1.405 | 1.565 | 1.935 | 14 | 1- -3      |
|            | 1.725 | 1.305 | 1.465 | 1.835 | 13 | 1- -2      |
|            | 1.625 | 1.205 | 1.365 | 1.735 | 12 | 1- -1      |
| 3 OBSOLETE | 1.525 | 1.105 | 1.265 | 1.635 | 11 | 1- -0      |
|            | 1.425 | 1.005 | 1.165 | 1.535 | 10 | -9         |
|            | 1.325 | .905  | 1.065 | 1.435 | 9  | -8         |
|            | 1.225 | .805  | .965  | 1.335 | 8  | -7         |
|            | 1.125 | .705  | .865  | 1.235 | 7  | -6         |
|            | 1.025 | .605  | .765  | 1.135 | 6  | -5         |
|            | .925  | .505  | .665  | 1.035 | 5  | -4         |
|            | .825  | .405  | .565  | .935  | 4  | -3         |
|            | .725  | .305  | .465  | .835  | 3  | -2         |
|            | .625  | .205  | .365  | .735  | 2  | 103682-1   |

| D | C | B | A | Nº OF POSITIONS | PART NO |
|---|---|---|---|-----------------|---------|
|---|---|---|---|-----------------|---------|

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.  
TOLERANCES ON:  
DECIMALS ±.005  
ANGLES ±

MATERIAL  
BLACK THERMOPLASTIC

FINISH

CONTRACT NO

DR 5/23/85

CHK 5/29/85

APPD 5/29/85

APPD 5/29/85

DSGN APPD

OTHER APPD

TE Connectivity

NAME

SHROUD, PIN, PANEL MOUNT, AMPMODU  
MTE, SINGLE ROW, .100 Ø

SIZE

C 00779

SCALE

FSCM NO

00779

DRAWING NO

103682

SHEET

CUSTOMER DRAWING