

P	LTR	DESCRIPTION	DATE	DWN	APVD
	E1	REVISED PER ECR-23-188565	18SEP2024	TB	JP

- 1


0.00076 [.000030] MIN GOLD PER AMP SPEC 112-162-3 IN LOCALIZED GOLD PLATE AREA AND 0.00254-0.00635 [.000100-.000250] BRIGHT TIN-LEAD PER AMP SPEC 112-26-1 IN LOCALIZED TIN-LEAD PLATE AREA OVER 0.00127 [.000050] MIN NICKEL PER AMP SPEC 112-25-2.
2.

WIRE RANGE: 0.5-1.4MM² (20-16 AWG).
3.



INSULATION RANGE: 2.01-3.20[.079-.126] DIA.
4.

DIMENSIONS IN BRACKETS ARE IN INCHES.
- 5

0.00076 [.000030] MIN GOLD PER AMP SPEC 112-162-3 IN LOCALIZED GOLD PLATE AREA AND 0.00254-0.00635 [.000100-.000250] MATTE TIN PER AMP SPEC 112-16-3 IN LOCALIZED TIN PLATE AREA OVER 0.00127 [.000050] MIN NICKEL PER AMP SPEC 112-25-2.

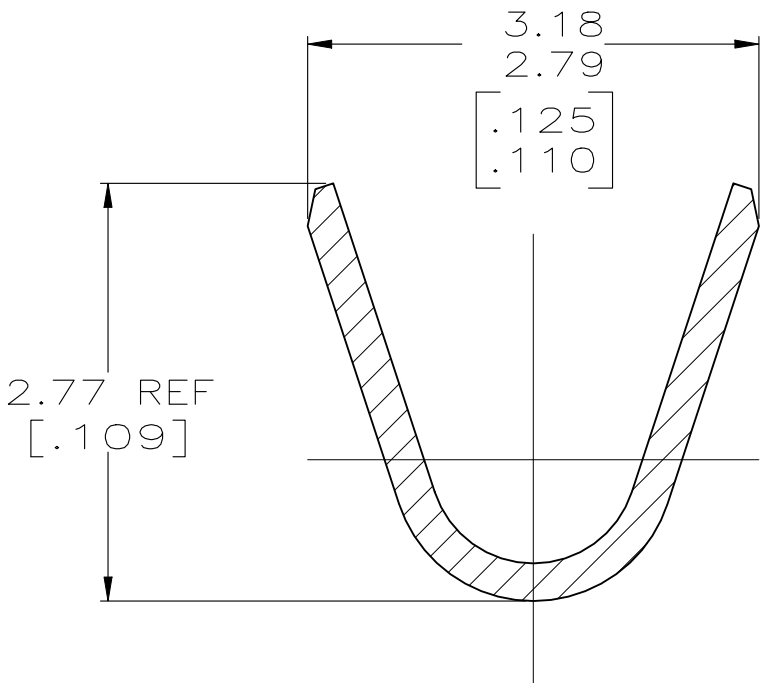

SECTION A-A
SCALE 20:1

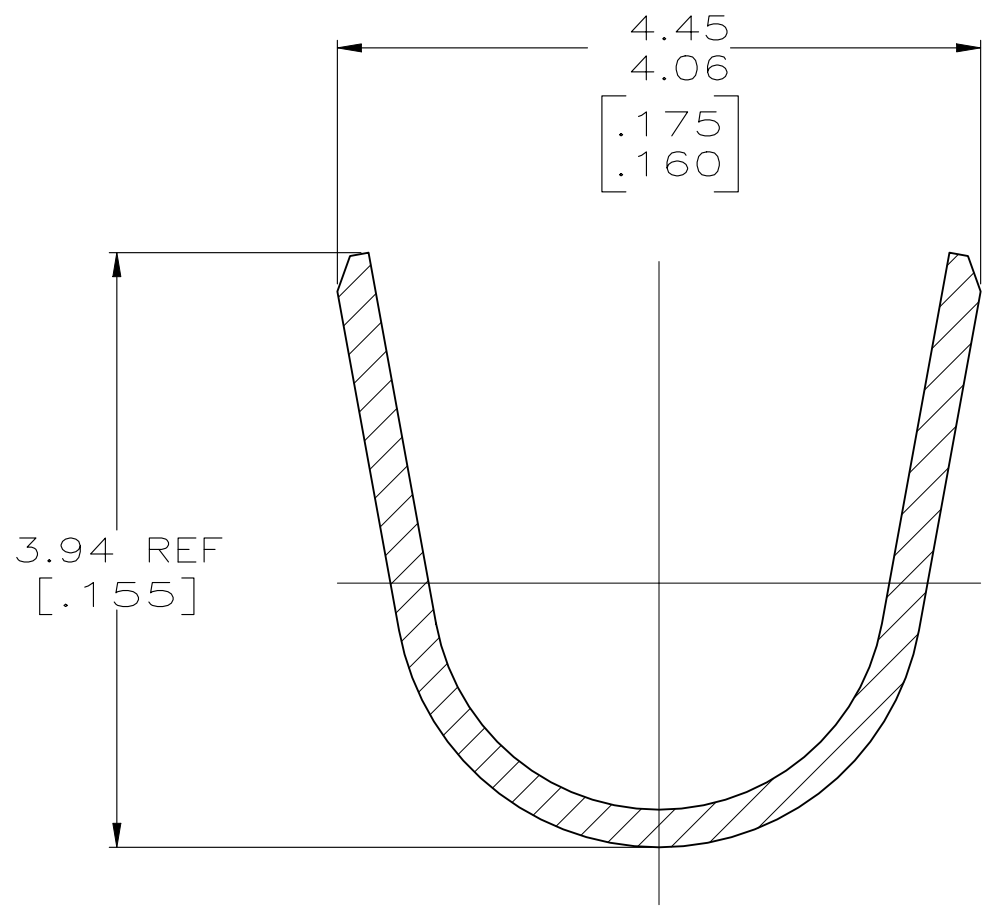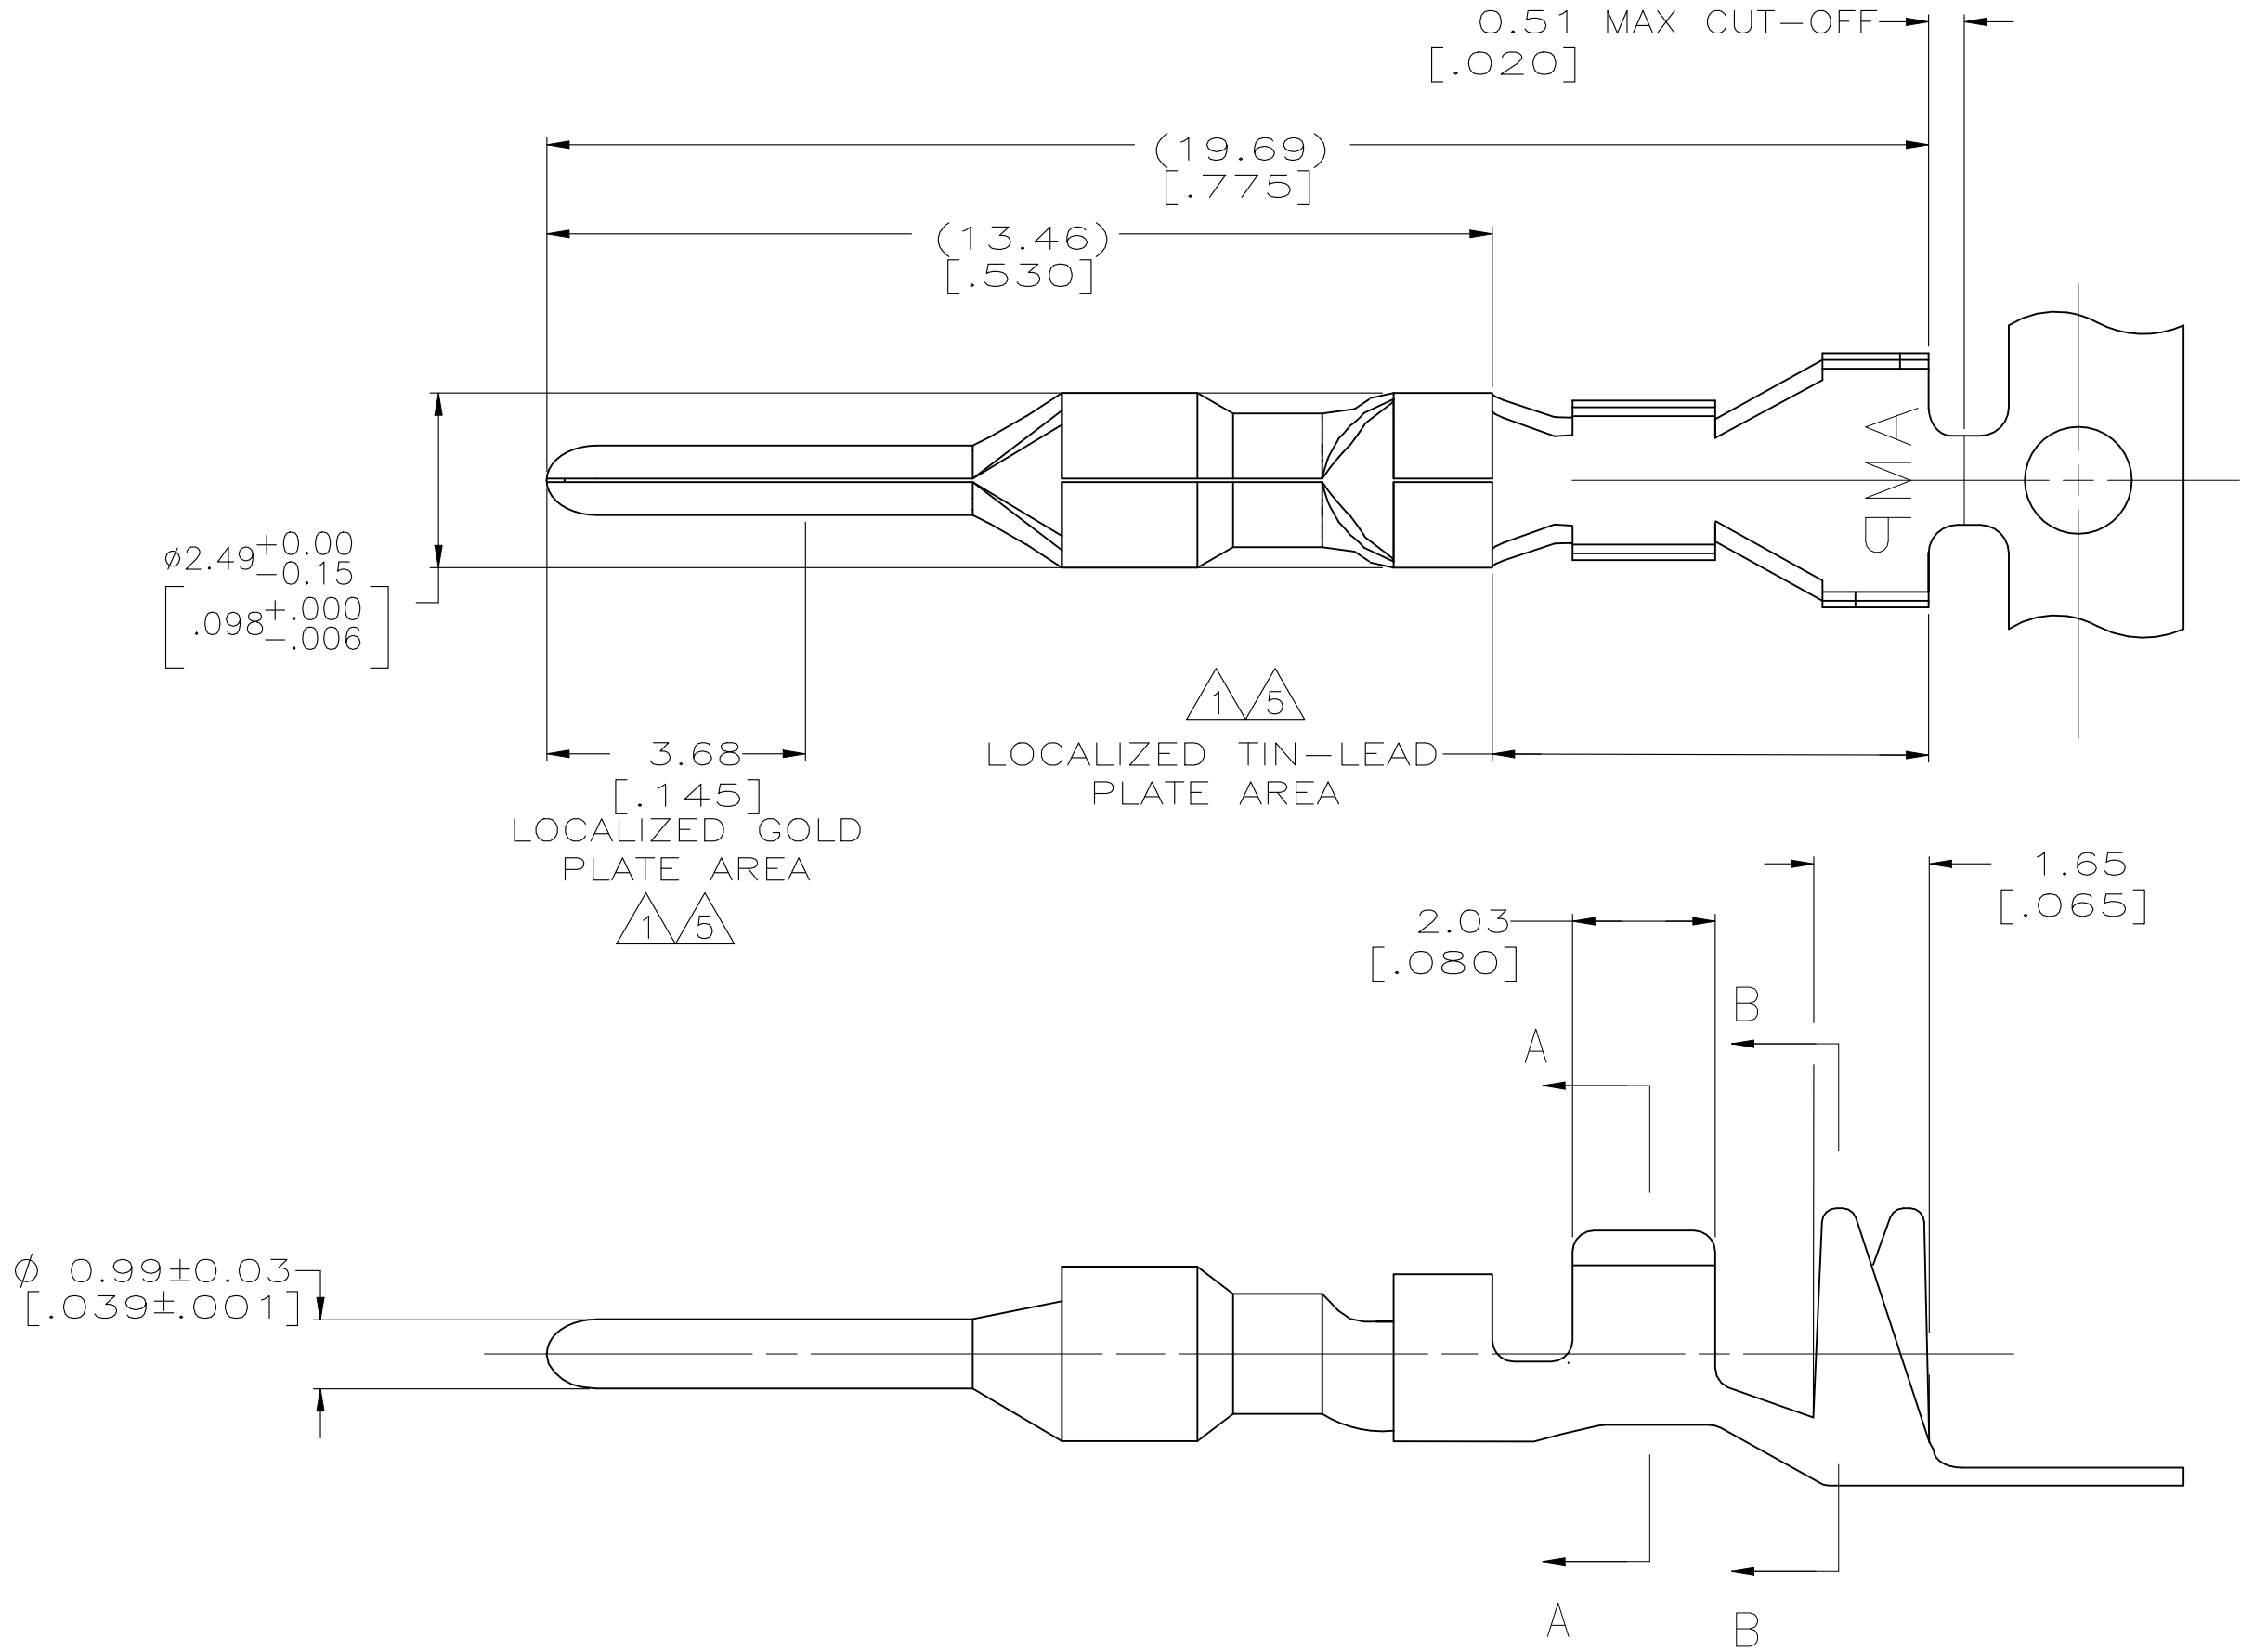

SECTION B-B
SCALE 20:1

SUPERSEDED WITH 1-794222-0

5	0.25[.010] BRASS	1-794222-0
1	0.25[.010] BRASS	794222-3
PRE-TIN	0.25[.010] BRASS	794222-1
FINISH	MATERIAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. VESTAL 2-20-98	TE TE Connectivity		
DIMENSIONS: mm [INCHES]		CHK R. SWING 2-20-98			
	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD -	NAME		
	0 PLC ± -	PRODUCT SPEC	PIN,		
	1 PLC ± -	APPLICATION SPEC	MINI UNIVERSAL MATE-N-LOK 2		
MATERIAL SEE TABLE	2 PLC ± -	WEIGHT	SIZE	CAGE CODE	DRAWING NO
	3 PLC ± 0.15 [.006]	-	A2	00779	C=794222
	4 PLC ± -	CUSTOMER DRAWING	SCALE	SHEET	REV
FINISH SEE TABLE		10:1	1 OF 1	E1	