

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	D2	REVISED PER ECR-24-219996	20JAN2025	RK	MDG


D

C

B



A

Schnitt A-A

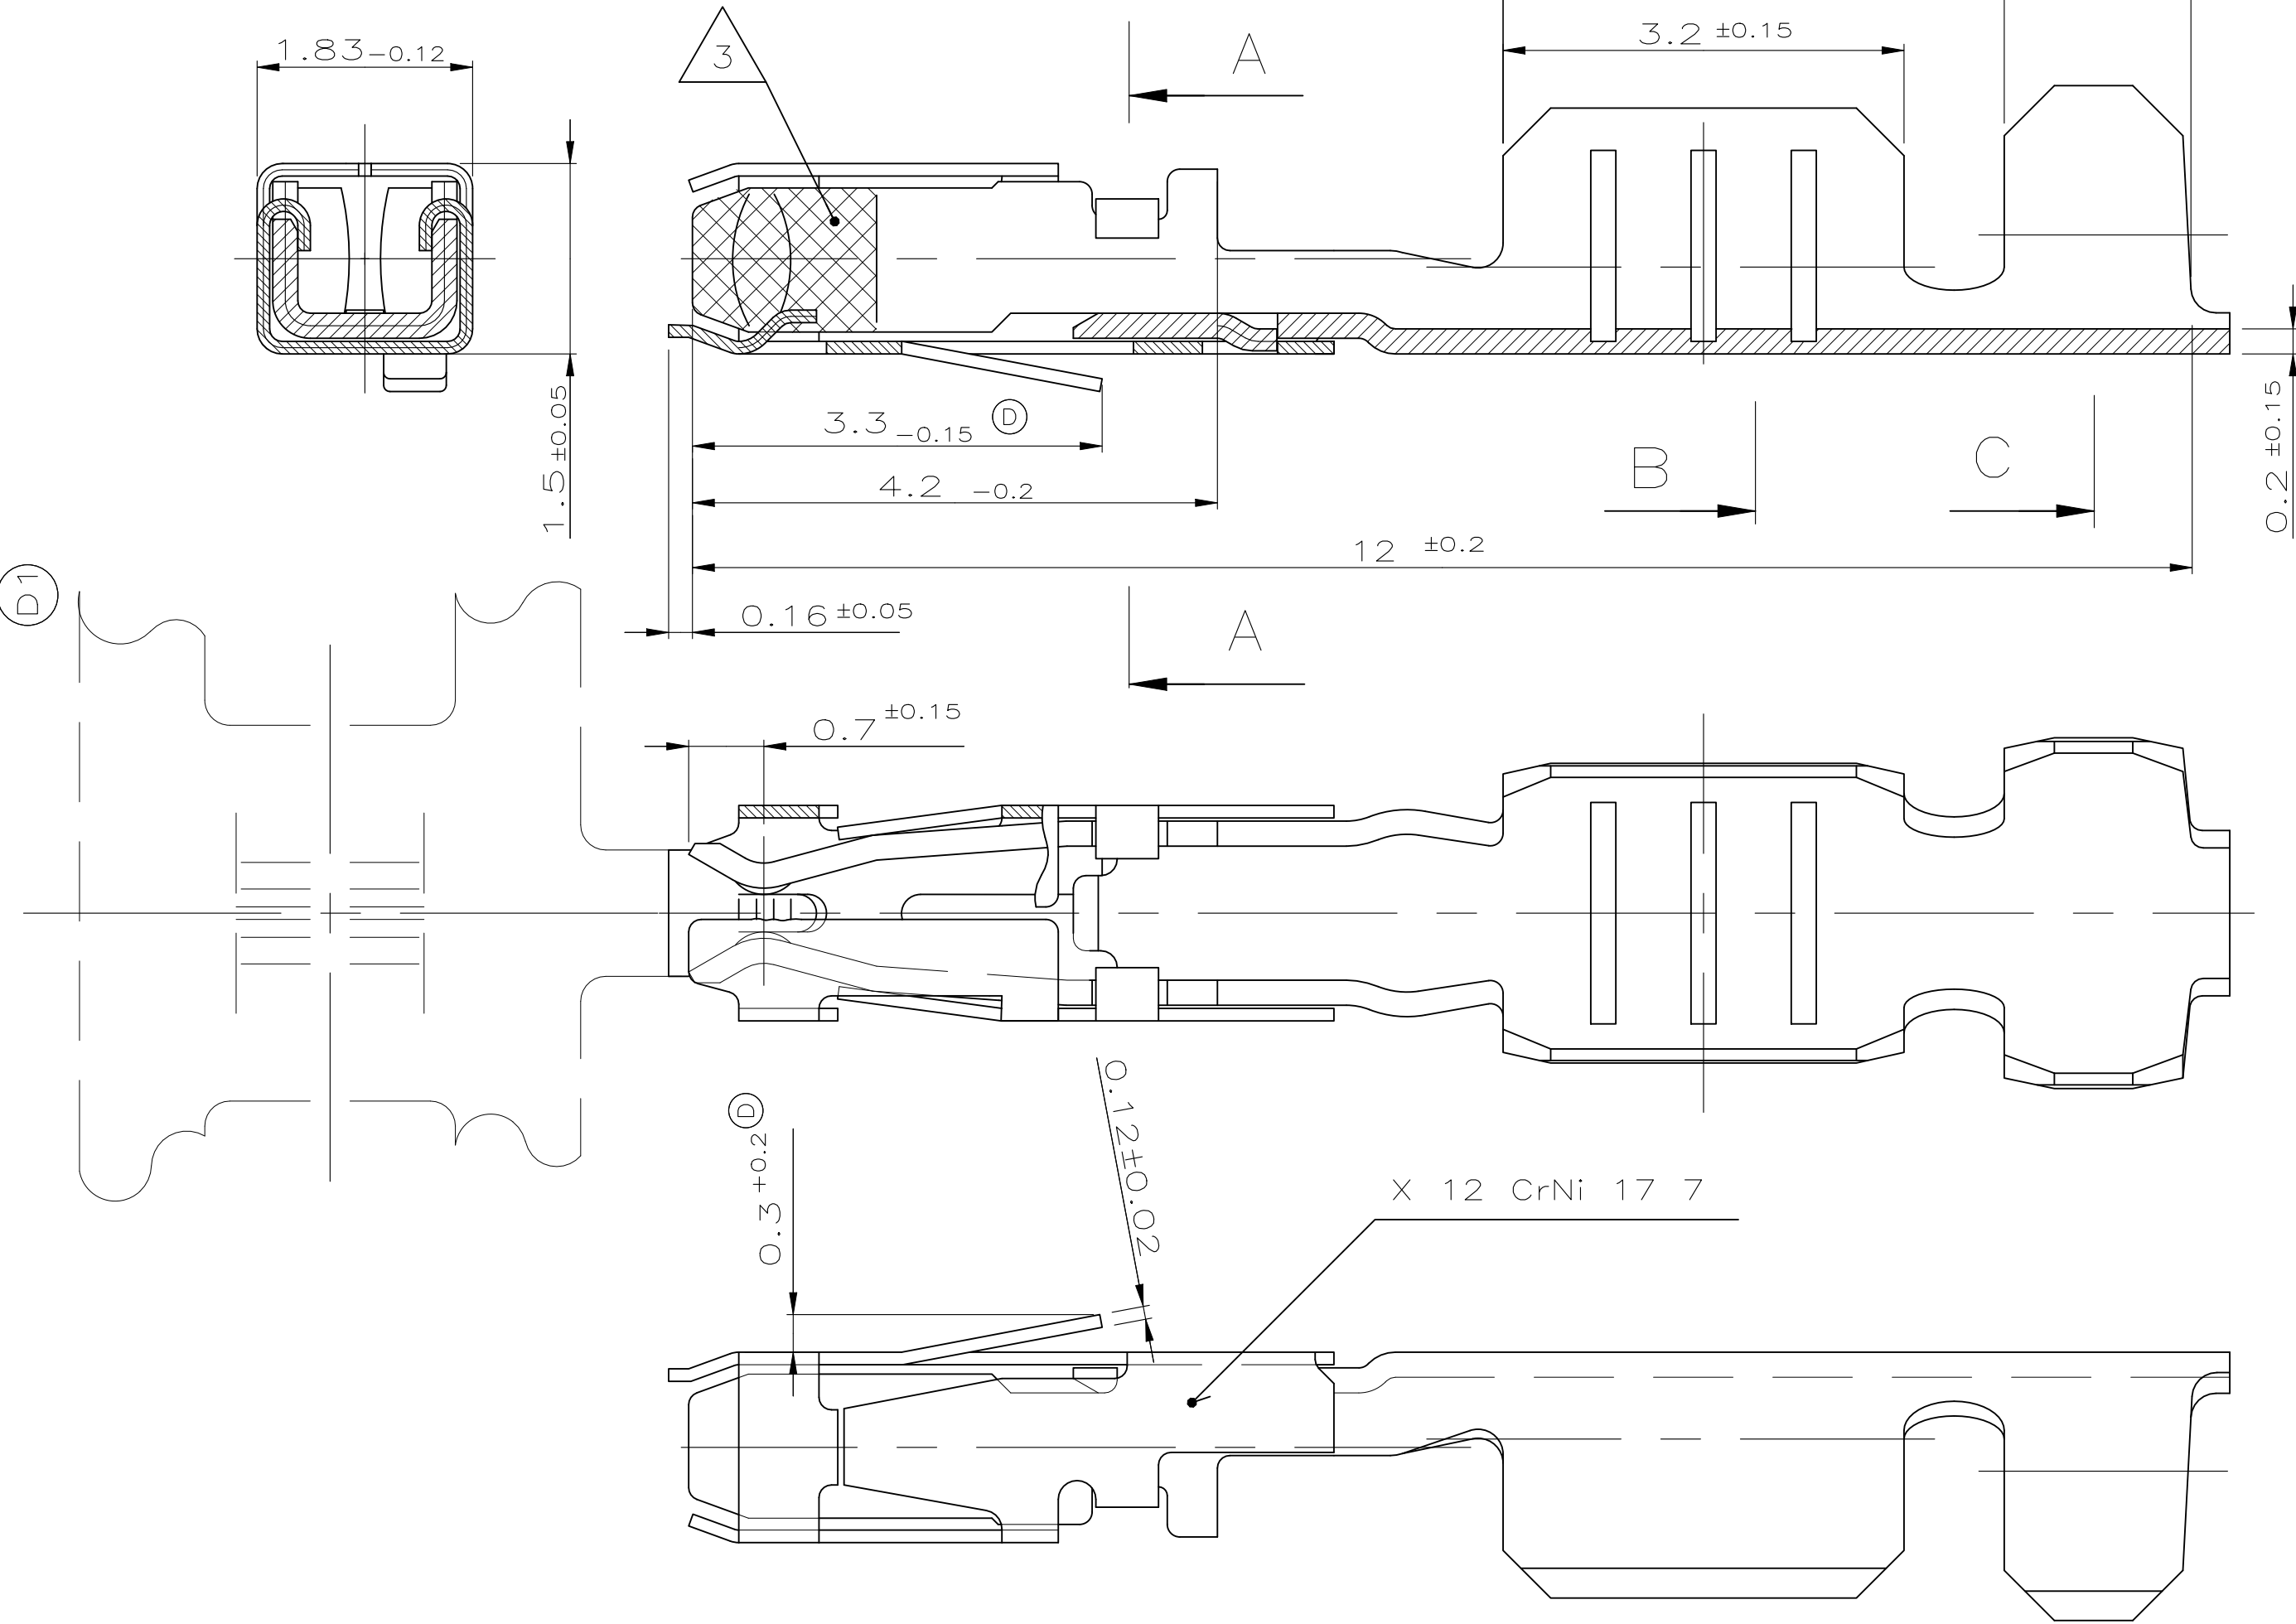

Schnitt B-B

Schnitt C-C

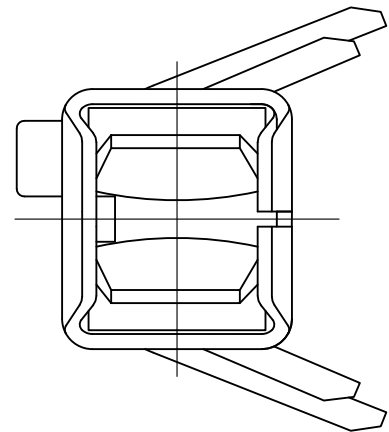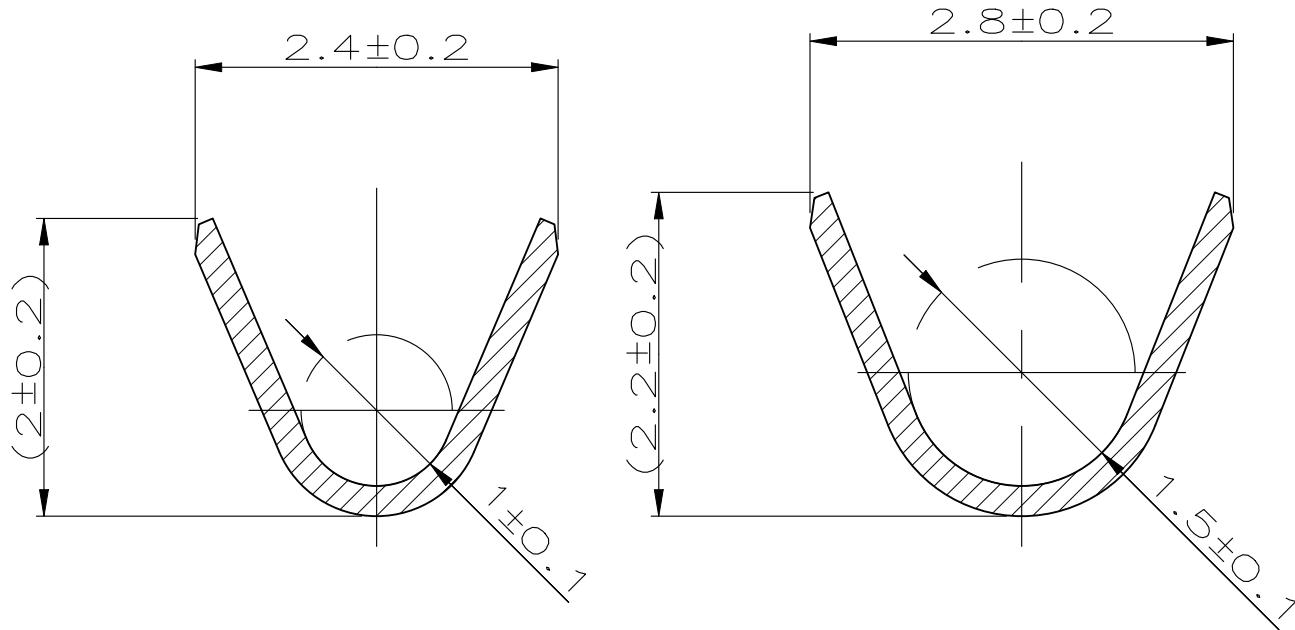

Bemerkungen

Drahtgrößenbereich: 0.35 bis 0.5mm²
Isolations-Ø: 1.4 bis 1.6 mm

Bemerkungen

- ① Kontaktkörper galv. unternickelt mit 0.5 µm bis 3.5µm
- ② Crimpbereich galv. verzinkt mit 1µm bis 3µm
- ③ Kontaktbereich galv. vergoldet mit min. 0.8µm
- ④ OBSOLETE

BESTELL-NR.	LOOSE PIECE NR.	POS.	STÜCK	BENENNUNG EINZELTEIL	WERKSTOFF	OBERFLÄCHE FARBE
963720-3	965969-3			MODU Buchsenkontakt	CuSn 4	galv.Au ①②③
-	-	-	-	-	-	-
963720-1④	965969-1	-	-	MODU Buchsenkontakt	CuSn 4	vorverzinnt

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L. POST 23.05.90
DIMENSIONS: mm		CHK H.Gehrke 02.04.93
	TOLERANCES, UNLESS OTHERWISE SPECIFIED:	APVD -
	0 PLC ± - 1 PLC ± - 2 PLC ± 0.2mm 3 PLC ± - 4 PLC ± - ANGLES ± -	PRODUCT SPEC -
MATERIAL CuSn 4	FINISH -	APPLICATION SPEC -
CUSTOMER DRAWING		WEIGHT -

DWN L POST		23.05.90		 TE Connectivity	
CHK H.Gehrke		02.04.93			
APVD —		NAME			
PRODUCT SPEC —		Spez.AMPMODU IV Buchsenkontakt —			
APPLICATION SPEC —		—			
WEIGHT —		SIZE A2	CAGE CODE 00779	DRAWING NO C-963720	RESTRICTED TO —
CUSTOMER DRAWING			SCALE 20:1	SHEET 1 OF 1	REV D2