






SECTION A-A



SECTION B-B



SECTION D-D

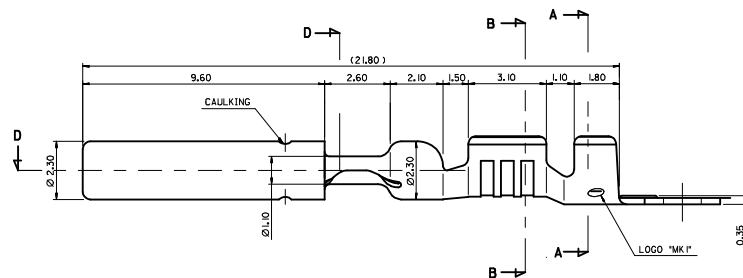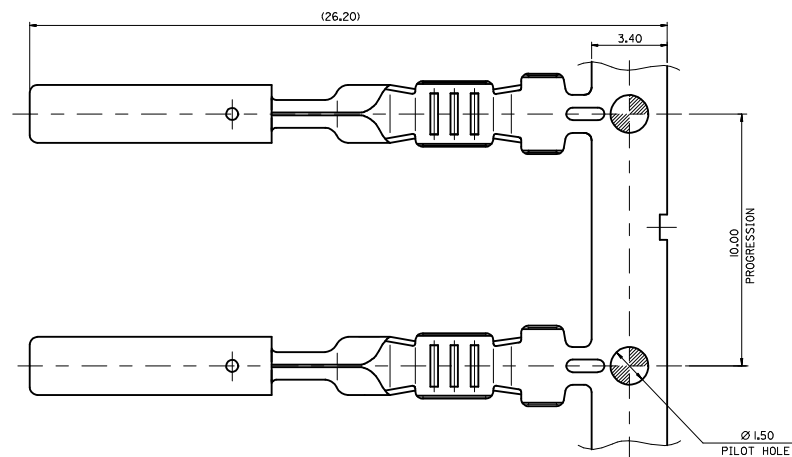

NOTE

1. RECOMMENDED LENGTH OF WIRE STRIP : 4.0~4.6
2. FINISH : CIRCULOCK F/TML BODY(TIN PLATING), SLEEVE(TIN PLATING)
3. WIRE RANGE (mm²) : AVS(AVSS) 0.3~0.85
4. MATERIAL

NO.	ENG. NO.	PART NAME	MATERIAL
1	35402-8002	CIRCULOCK F/TML BODY	COPPER ALLOY THICKNESS 0.25
2	35401-9102	SLEEVE	BRASS (THICKNESS : 0.25)

REVISED
EC NO: KTR2015-0113
DRWN: JKSE001 2015/06/09
CHKD:
APPR: JYCH01 2015/07/22

QUALITY SYMBOLS
=0
=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± ---	± ---
1 PLACE	± 0.15	± ---

ANGULAR ± 1 °

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
MM ONLY

DRAWN BY JKSE001 DATE 2015/06/09
CHECKED BY DATE
APPROVED BY DATE

MATERIAL NO. SEE TABLE

SIZE A3

SCALE 10:1

DESIGN UNITS METRIC

THIRD ANGLE PROJECTION

1.0 FEMALE TERMINAL



MOLEX INCORPORATED

DOCUMENT NO. SD-35403-1002

SHEET NO. 1 OF 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION