
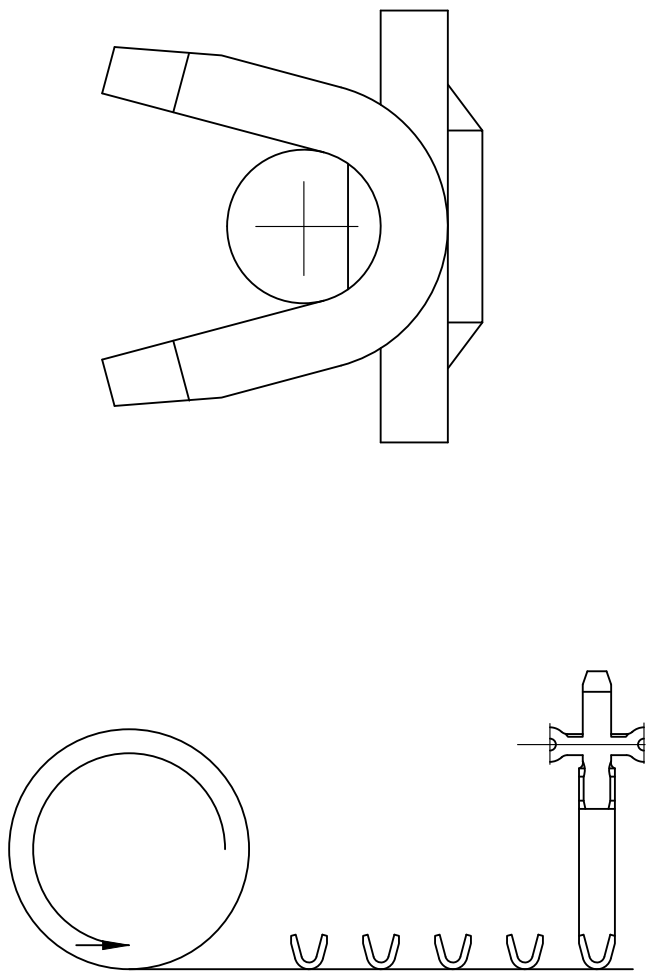


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	N1	REVISED PER ECN-25-319995	14MAY2025	RK	FJS

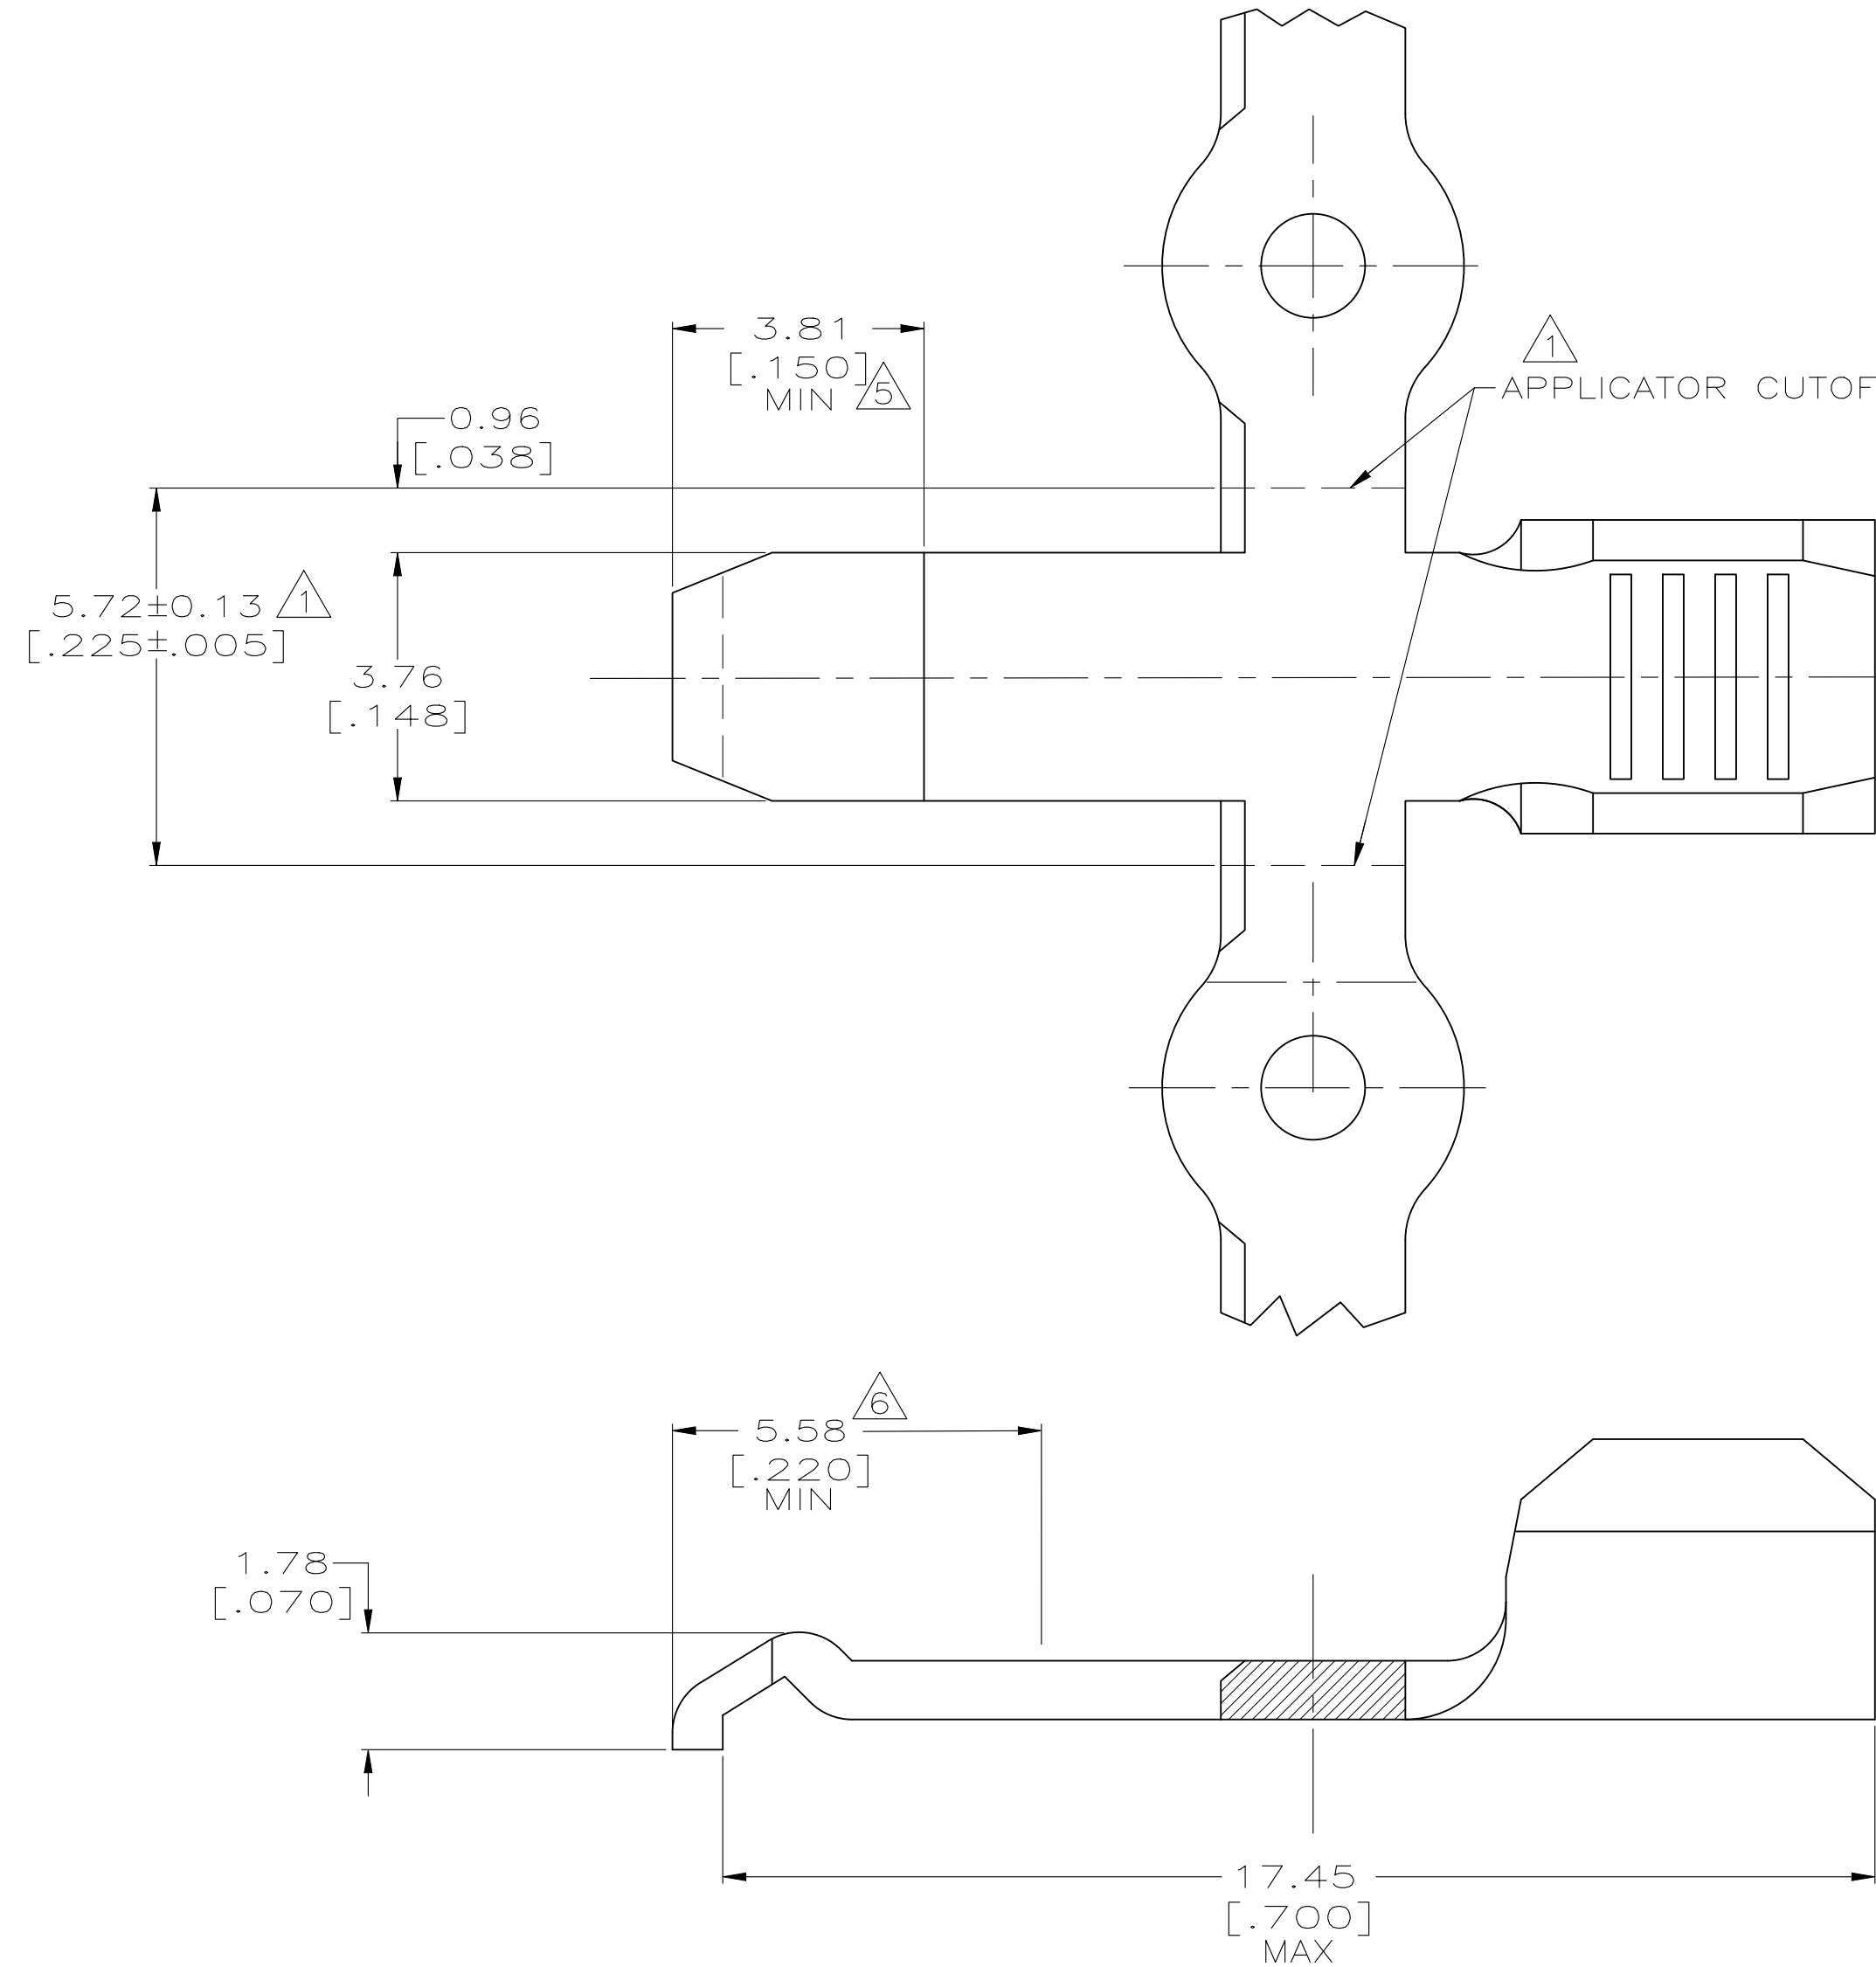

DIRECTION OFF OF REEL
INTO THE APPLICATOR

SCALE: NONE

- 1 REFER TO AMP INSTRUCTION SHEET IS 2928 FOR APPLICATOR AND CUTOFF DETAILS.
- 2 MATERIAL: COPPER
- 3 FINISH: 0.05 [0.00200] MINIMUM THICK SILVER PLATING.
- 4 FINISH: 0.00076 [0.00030] MINIMUM THICK GOLD PLATING OVER 0.00127 [0.00050] MINIMUM THICK NICKEL PLATING.
- 5 FINISH: 0.00076 [0.00030] MINIMUM THICK PRECIOUS METAL PLATE PLATING OVER TOP SURFACE INDICATED AND GOLD FLASH OVER REMAINING SURFACES OVER 0.00127 [0.00050] MINIMUM NICKEL PLATING.
- 6 TOP SURFACE IS GRAPHITE COATED IN AREA INDICATED.

SUPERSEDED BY -2 OBSOLETE OBSOLETE	3 6	STRIP	1-53892-1
	5	STRIP	53892-8
	4	LOOSE PIECE	53892-7
	3	LOOSE PIECE	53892-4
	3	STRIP	53892-2
FINISH		DESCRIPTION	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K TILLMAN/UTA 3-21-94	TE Connectivity	
DIMENSIONS: INCHES		CHK D. HUSSEY 3-23-94		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. KEMPKA 3-23-94	NAME CONTACT, CRIMP BARREL, SERIES 1, POWER LOCK	
0 PLC ± - 1 PLC ± - 2 PLC ± 0.20 [0.008] 3 PLC ± - 4 PLC ± - ANGLES ± 5°		PRODUCT SPEC 108-11026 APPLICATION SPEC 114-6032		
MATERIAL 2		WEIGHT -	SIZE A2	CAGE CODE 00779
SEE TABLE		CUSTOMER DRAWING	SCALE 10:1	SHEET 1 OF 1
			REV N1	