

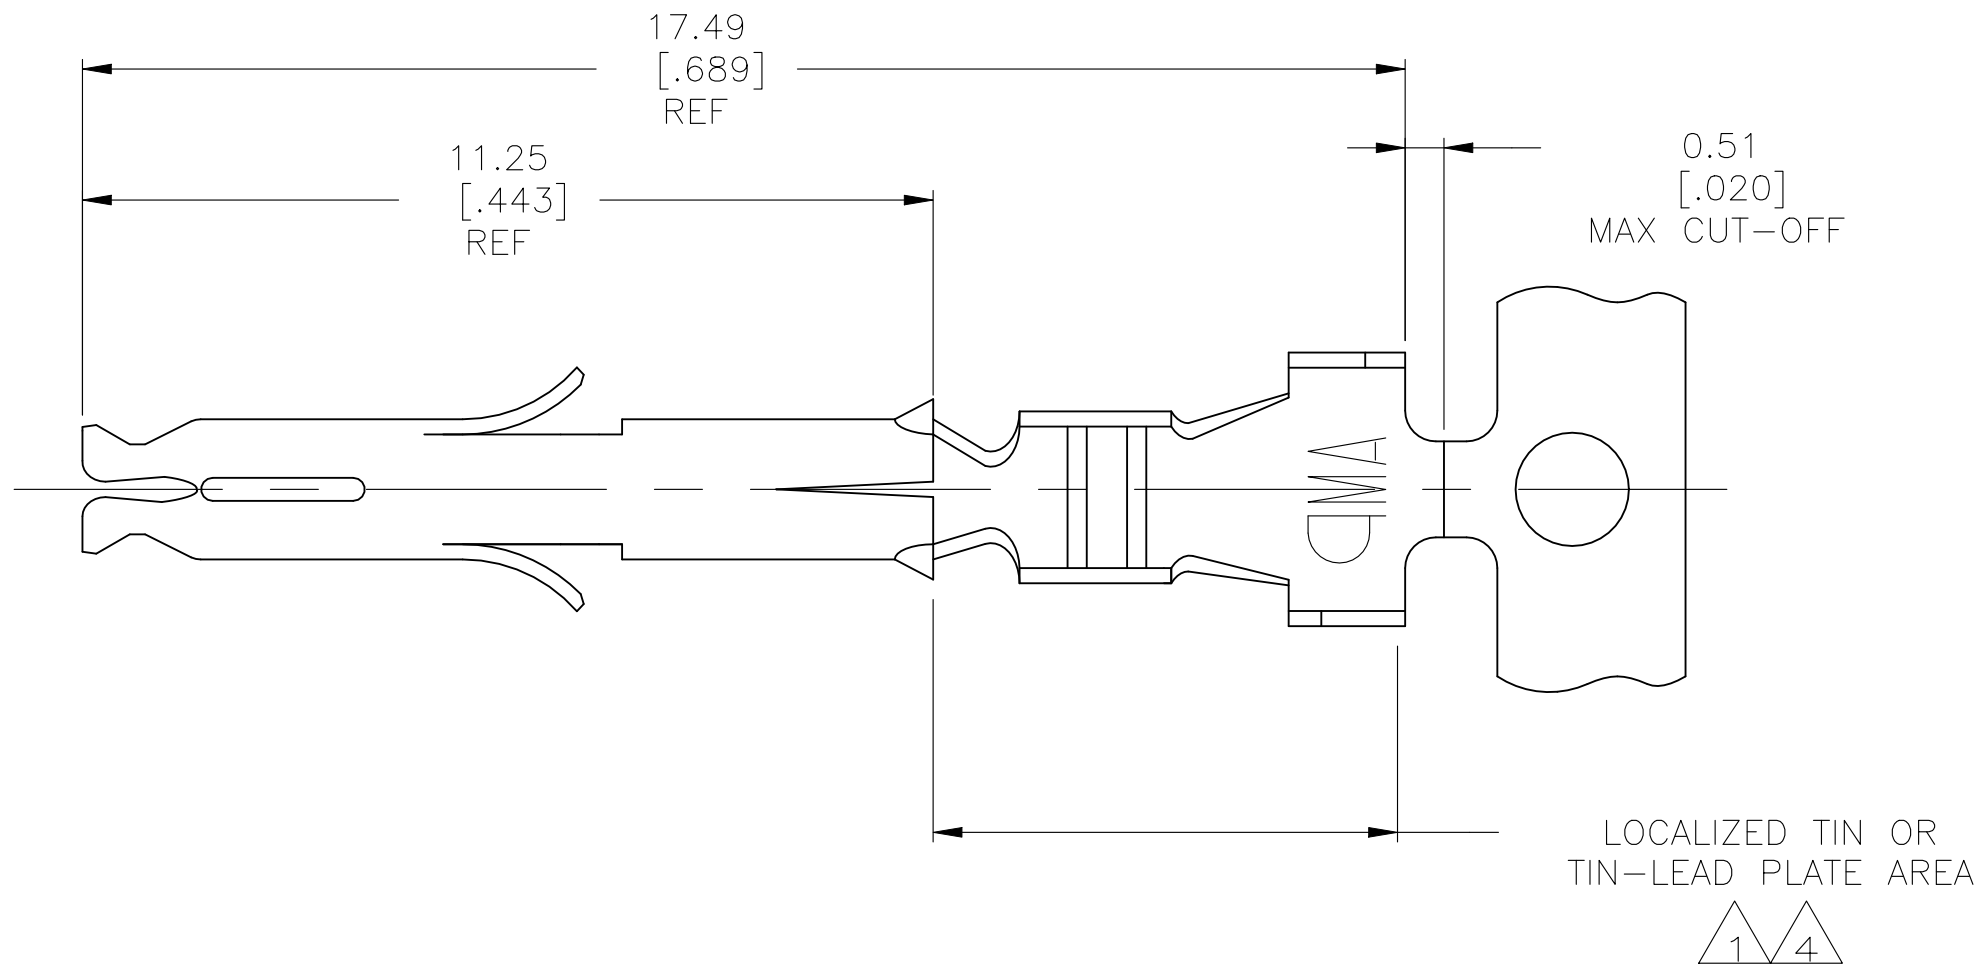



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	G2	REVISED PER ECR-23-175974	20OCT2023	MV	JP

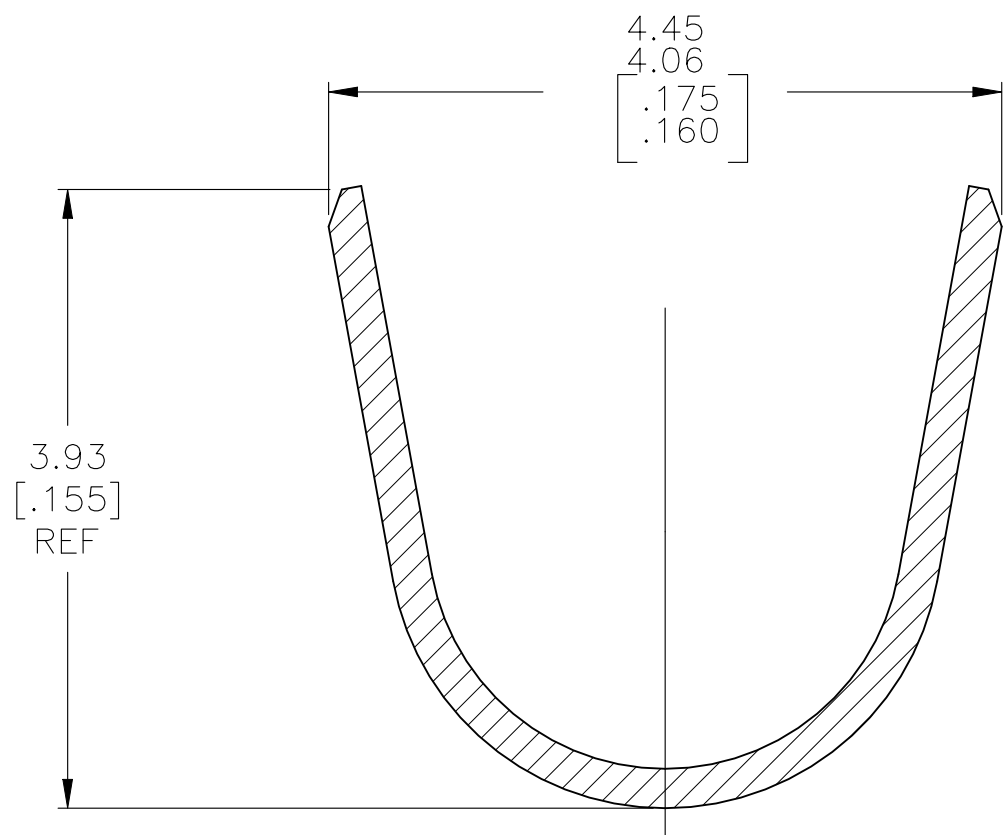

1. 0.00076 [.000030] MIN GOLD PER IN LOCALIZED GOLD PLATE AREA AND 0.00254-0.00635 [.000100-.000250] BRIGHT TIN-LEAD PER IN LOCALIZED TIN-LEAD PLATE AREA OVER 0.00127 [.000050] MIN NICKEL.
2. WIRE RANGE: 0.5-1.4MM² (20-16 AWG).
3. INSULATION RANGE: 2.01-3.20[.079-.126] DIA.
4. 0.00076 [.000030] MIN GOLD PER IN LOCALIZED GOLD PLATE AREA AND 0.00254-0.00635 [.000100-.000250] MATTE TIN IN LOCALIZED TIN PLATE AREA OVER 0.00127 [.000050] MIN NICKEL.

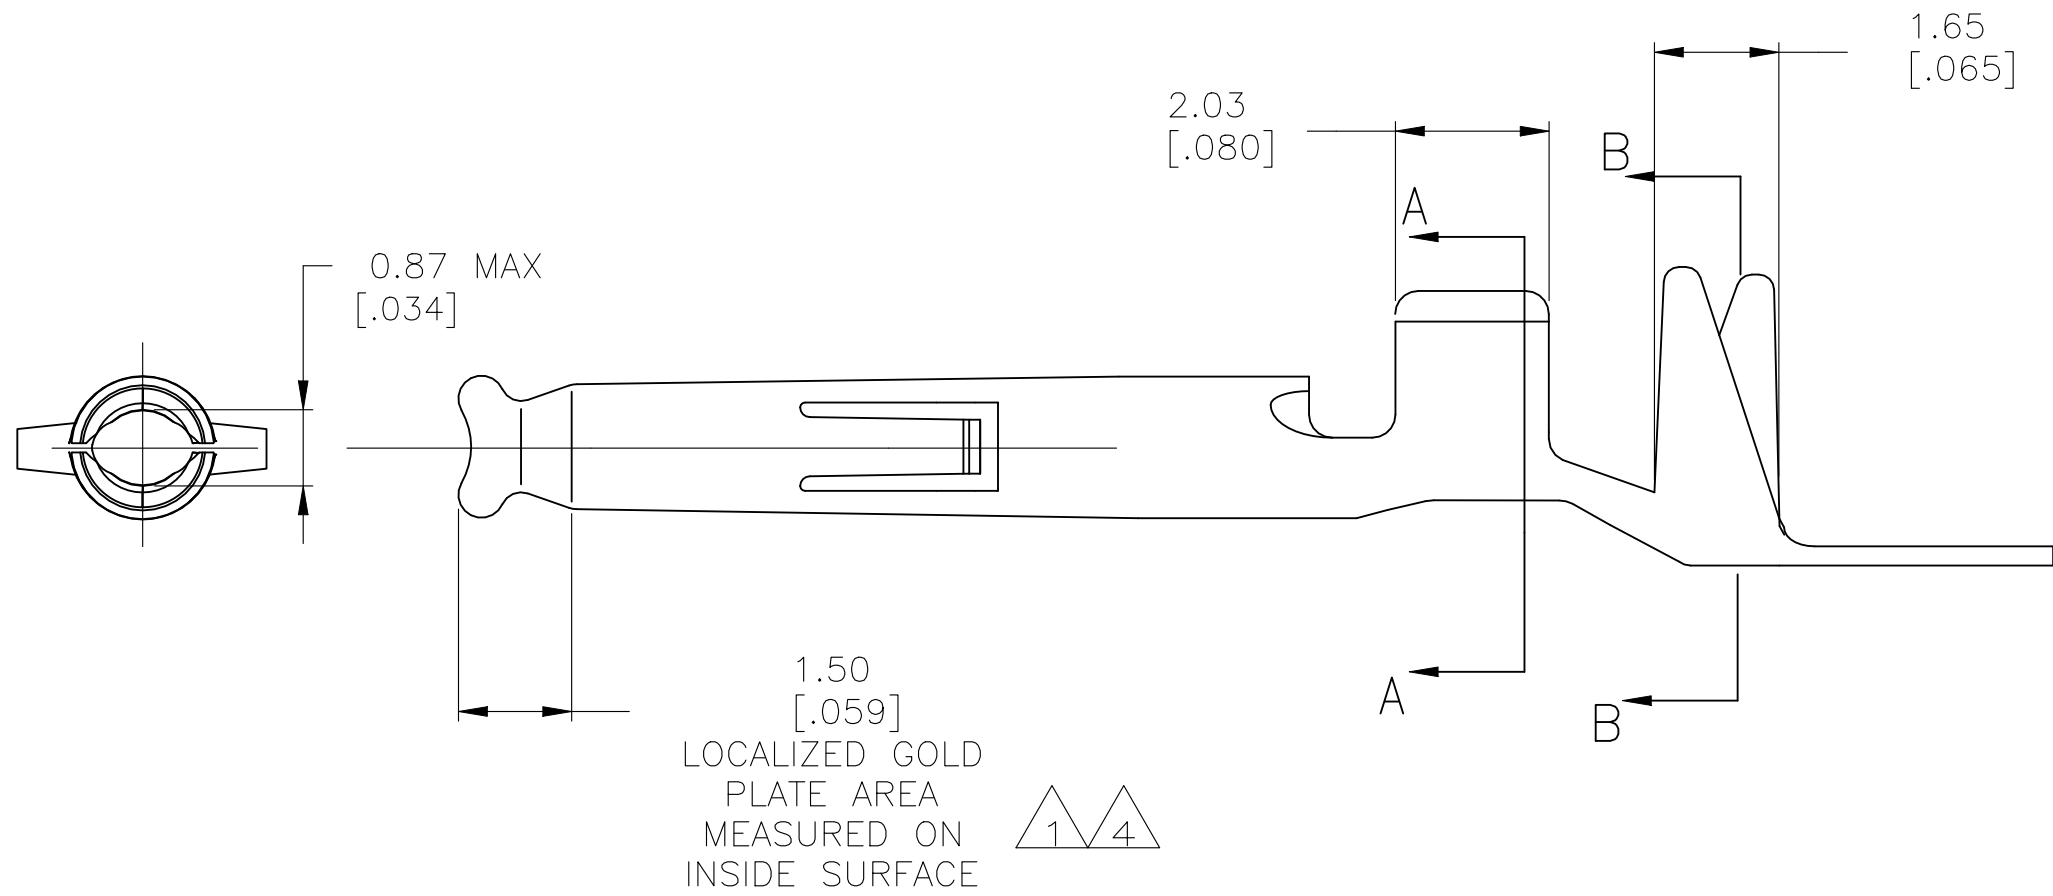

SECTION B-B
SCALE 20:1

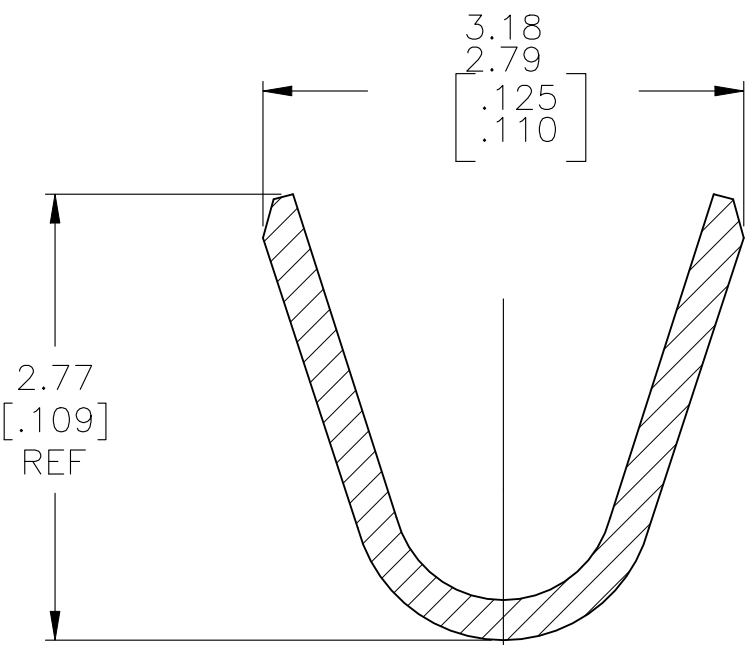

SECTION A-A
SCALE 20:1

SUPERCEDED BY 1-794407-1	4	0.25 [.010] PH BRZ	1-794407-1
	4	0.25 [.010] BRASS	1-794407-0
SUPERCEDED BY 1-794407-0	1	0.25 [.010] PHOS BRONZE	794407-6
	PRE-TIN	0.25 [.010] PHOS BRONZE	794407-4
SUPERCEDED BY 1-794407-0	1	0.25 [.010] BRASS	794407-3
	PRE-TIN	0.25 [.010] BRASS	794407-1
FINISH		MATERIAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. HOOVER 10JAN03	TE Connectivity		
DIMENSIONS: mm [INCHES]		CHK C.JONES 10JAN03			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD C.JONES 10JAN03	NAME SOCKET, MINI UNIVERSAL MATE-N-LOK(TM)		
0 PLC ± -		PRODUCT SPEC 108-1542			
1 PLC ± -		APPLICATION SPEC 114-16017	SIZE A2 CAGE CODE 00779 C=794407		
2 PLC ± 0.13[.005]		WEIGHT 0.000000			
3 PLC ± -		CUSTOMER DRAWING	SCALE 10:1 SHEET 1 OF 1 REV G2		
4 PLC ± -					
ANGLES ± -					
FINISH -					