



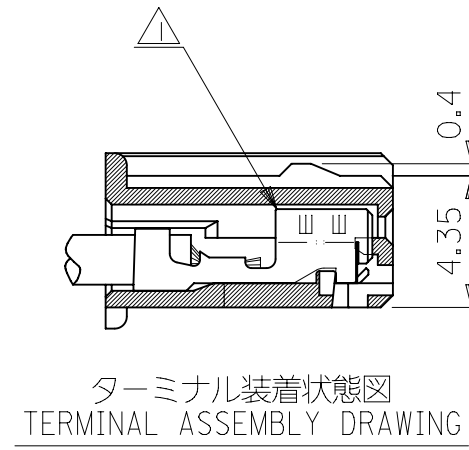


△ 適合ターミナル : 5035I-8*00
APPLICABLE TERMINAL : 5035I-8*00

2. 嵌合相手 : 53375,53376,53388,53389,53426
53535 シリーズ
MATE WITH : 53375,53376,53388,53389,53426
53535 SEIRES

△ ③ 偶数極の製品に適用。
APPLY EVEN CIRCUIT PRODUCTS.

△ ④ ロックの数 NUMBER OF LOCKS
5極以下 : 1個
LESS THAN 5 CIRCUIT PRODUCTS : 1 PIECE
6極以上 : 2個
MORE THAN 6 CIRCUIT PRODUCTS : 2 PIECES

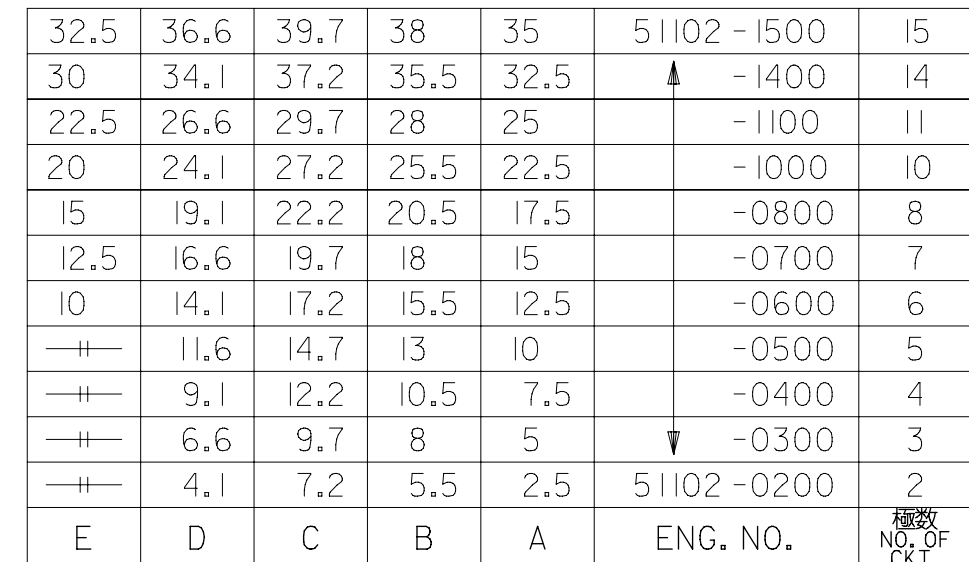

材料 MATERIAL	PBTP, UL94V-0 (白色 WHITE)
仕上げ FINISH	———H———
適用電線範囲 WIRE RANGE	———H———
被覆外径 INS. RANGE	———H———

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																	
DIMENSION UNITS		SCALE		CURRENT REV DESC: OBSOLETE PART NO				molex									
mm		4:1															
GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 629832				2.5 W/B CONN HSG (FRICTION LOCK)									
				DRWN: VLOKESHA				2019/12/18									
				CHK'D: GGA				2020/01/22									
				APPR: GGA				2020/01/22									
				INITIAL REVISION:													
				DRWN: H.HIRAMOTO				1992/07/29									
0 PLACES ±				APPR: M.FUKUSHIMA				1995/05/23									
ANGULAR TOL ± °				THIRD ANGLE PROJECTION				DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS						A3-SIZE		51102		SEE CHART		GENERAL MARKET		1 OF 1			