

The product described in this document has not been fully tested to ensure conformance to the requirements outlined below. Therefore, TE Connectivity (TE) makes no representation or warranty, express or implied, that the product will comply with these requirements. Further, TE may change these requirements based on the results of additional testing and evaluation. Contact TE Engineering for further details.


VolTron 1000 – SMD Style

1. SCOPE

1.1. Content

This specification covers the performance, testing and quality requirements of the SMD - version of VolTron 1000 connector for use in high voltage applications.

The qualification testing has been carried out representatively with the 2-pin up to 6-pin 90° and 180° version.

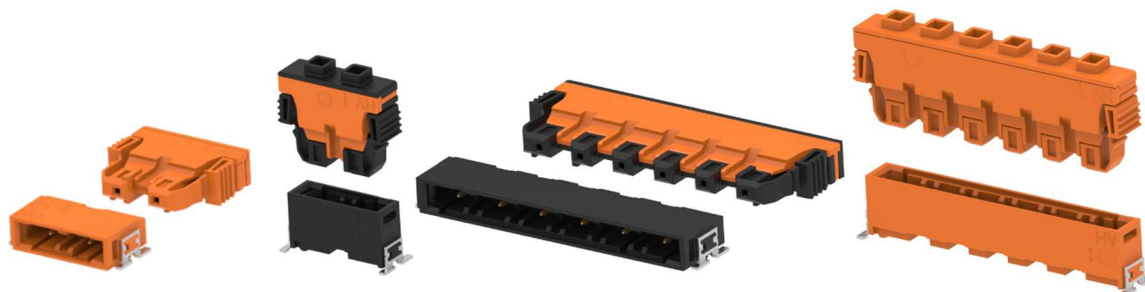

1.2. Qualification

When tests are performed on the subject product line, procedures specified in 3.4 shall be used. All inspections shall be performed using the applicable inspection plan and product drawing. All test groups are performed according to the requirements defined within VW75174, VW80332, USCAR37.

1.3. Qualification Test Results

The product performs the electrical, mechanical and climatic requirements of Chapter 3.4 And have passed successful qualification.

2. APPLICABLE DOCUMENTS AND FORMS

The following documents and forms constitute a part of this specification to the extent specified herein. Unless otherwise indicated, the latest edition of the document applies.

In the event of conflict between the requirements of this specification and the product drawings, the product drawings shall take precedence. In the event of conflict between the requirements of this specification and the referenced documents, this specification shall take precedence.

2.1. TE Documents

- 108-160990: MaxiBridge Crimp Contacts
- 114-94917: Application Specification
- 114-94917-1: Application Specification for crimp contact
- 107-94917: Packaging Specification
- 501-19324-1: Qualification Test Report
- C-544840-E: PCB-Layout requirement – recommended (mandatory)

2.2. Industry Documents (applicable standards)

- DIN/IEC 60512: Electromechanical components for electronic equipment, basic testing procedures and measuring methods
- DIN EN 60068: Environmental tests
- IPC/JEDEC J-STD-020: Moisture/Reflow Sensitivity Classification for Non-hermetic Solid State Surface Mount Devices.
- VW 75174: Motor Vehicle Connectors – Tests (2018-10; 2010-04; 2004-10)
- VW 80332: Motor Vehicle High-Voltage Contacts (2019-01)
- USCAR37: High Voltage Connector Performance - Supplement to SAE/ USCAR-2 (2008-08)

3. REQUIREMENTS

3.1. Design and Construction

Product shall be of the design, construction, materials and physical dimensions specified on the applicable product drawing.

The product has the following ratings (operating):

- Rated impulse voltage: 2500 Vdc for 1000 Vdc (operating voltage)
- mating cycles: ≥ 20
- Maximum operating altitude above sea level: 5000 m
- **The product has to be used in an IP protected enclosure**
- Pollution degrees 2 additional: restricted to a non-condensing environment.
 - (Not permitted: Condensation; Icing; rainfall; water; water drops)
- Moisture: Not permitted
- CPA-function: No
- Plastics Material group for all housings:
 - CTI > 600
 - Material-class: I
 - UL 94-V0
- *It is not intended to repair the female and male connector due to the installation situation*
- **THE CONNECTOR SHALL ONLY BE TOUCHED, PLUGGED AND / OR REMOVED IN A "POWER-FREE CONDITION" (see C-544840-E Drawing Layout requirement).**

Materials

Female housing 2-pin/ 6-pin	PA-GF30 (black/ orange)
Female Cover 2-pin/ 6-pin	PA-GF30 FR (orange)
Female contact	CuNi2Si
Plating connection area	Sn over Ni
Plating contact area	Au flash over PdNi over Ni
Male housing	PA-GF30 FR (black/ orange)
Male contact	CuNi2Si
Plating connection (solder terminal) area	Sn over Ni
Plating contact area	Au flash over PdNi over Ni

3.2. Ratings

Part number	Name	Wire range*	Voltage	Current	Temp. range
524191-E 544950-E	Female connector 2-pin black encoding, 6.2 SRC-A crimp	Cable Electroair KZ 06 AWG22 (7x0,25) Conductor: Stranded copper wire, silver-plated Insulation: PTFE tapes	1000 VDC	Original design target min.: 0.5 A Actual: current carrying capability See derating	-40 to +150 °C.
524192-E 544951-E	Female connector 2-pin orange encoding 6.2 SRC-A crimp				
524197-E 544956-E	Female connector 5-pin black encoding, 6.2 SRC-A crimp				
524198-E 544957-E	Female connector 5-pin orange encoding 6.2 SRC-A crimp				
524200-E 544958-E	Female connector 6-pin black encoding, 6.2 SRC-A crimp				
524201-E 544959-E	Female connector 6-pin orange encoding 6.2 SRC-A crimp				
524226-E	Male connector 2-pin black encoding 6.2 SRC-A SMT angled	-			
524227-E	Male connector 2-pin orange encoding 6.2 SRC-A SMT angled	-			
524232-E	Male connector 5-pin black encoding 6.2 SRC-A SMT angled	-			
524233-E	Male connector 5-pin orange encoding 6.2 SRC-A SMT angled	-			
524235-E	Male connector 6-pin black encoding 6.2 SRC-A SMT angled	-			
524236-E	Male connector 6-pin orange encoding 6.2 SRC-A SMT angled	-			
524255-E	Male connector 2-pin black encoding 6.2 SRC-P SMT straight	-			
524256-E	Male connector 2-pin orange encoding 6.2 SRC-P SMT straight	-			

524261-E	Male connector 5-pin black encoding 6.2 SRC-P SMT straight	-			
524262-E	Male connector 5-pin orange encoding 6.2 SRC-P SMT straight	-			
524264-E	Male connector 6-pin black encoding 6.2 SRC-P SMT straight	-			
524265-E	Male connector 6-pin orange encoding 6.2 SRC-P SMT straight	-			
464762-E 464763-E	Female contact	AWG22			
817149-E*	Cable Electroair KZ 06 Conductor: Stranded copper wire, silver-plated Insulation: PTFE tapes (Aeronautic and Defence NF C 93-523) (Flame retardant: IEC 60332-1-2 / EN 60332-1-2 / NF C 32-070 test C2, FAR 25)	AWG22 (7x0,25)	1000 Vdc		-90 °C to +200 °C.

* The following cable have been approved in combination with the VolTron 1000

3.3. Quality Assurance Provision

3.3.1. Test Condition

Unless otherwise specified, all tests shall be performed at ambient environmental conditions.

Temperature	15 – 35 °C
Relative humidity	25 - 75%
Atmospheric pressure	86 – 106 kPa

3.3.2. Storage conditions:SS

- According to IEC 60721-3-1 Class 1K2
- T max +40°C / Moisture max 85% RH

3.4. Test Requirements and Procedures Summary

* [TGXX]: Numbering based on the test groups according to VW75174 and VW80332, USCAR 37

	TEST DESCRIPTION	REQUIREMENT	PROCEDURE
VISUAL / GENERAL			
3.4.1.	Initial examination of product / Visual inspection [TG0] [TG1]*	Meets requirements of product drawing (drawing conformity)	DIN EN 60512-1-1 DIN EN 60512-1-2
3.4.2.	Final examination of product	Meets requirements of product drawing (drawing conformity)	
3.4.3.	Heat resistance to reflow soldering	20 - 40 sec. at max. temp. 260 °C	IPC / JEDEC J-STD 020

ELECTRICAL			
3.4.4.	Volume resistance in contact area (RC) [TG0]*	$R = R_C + 2 \times R_{CA} < 15 \text{ m}\Omega$	DIN EN 60512-2-1
	Volume resistance in connection area (RCA) [TG0]*		DIN EN 60512-2-1
3.4.5.	Insulation resistance [TG0]*	$R_{isol} > 100 \text{ M}\Omega$ at $U = 500 \text{ V}$, $t = 60 \text{ s}$ $R_{isol} > 200 \text{ M}\Omega$ at $U = 1000 \text{ V}$, $t = 60 \text{ s}$	DIN EN 60512-3-1 Standard housing, pitch 6.2 mm Only potentials to each other. VW80332 only measurement task 1 is applicable
3.4.6.	Dielectric withstanding voltage	Neither creeping discharge nor flashover shall occur. Current leakage: $< 10 \text{ mA}$ (2150 Vdc = 1 mA) (4800 Vdc = 2 mA)	Dielectric strength is determined in mated condition, without applied foil wrap 2150 Vdc for 1 min. - VW80303 4800 Vdc for 1 min. - USCAR37 (1600 + 3.2 x 1000 Vdc = 4800 Vdc)
3.4.7.	Current heating, derating [TG12]*	Current excess temperature Derating without housing	DIN EN 60512-5-1 DIN EN 60512-5-2 Ambient temperature is measured in 50 mm distance to the hottest point: Contact point between the female and the male contact
3.4.8.	Influence of contact housing on the derating [TG13]*	Current overtemperature with contact housing Derating with contact housing See figures chapter 4.1	DIN EN 60512-5-1 DIN EN 60512-5-2
3.4.9.	Thermal time constant [TG14]*	See diagram thermal time constant, chapter 4.2	$T_{Test} = 80 \text{ }^\circ\text{C}$ / $I_{nom.} = 8.56 \text{ A}$

	MECHANICAL		
3.4.10.	Contact overlap [TG4]*	Primary- and secondary locking: Contact overlap ≥ 1 mm	Theoretical proof (CAD)
3.4.11.	Interaction between contact and contact housing [TG6]* Function of the primary locking device/latch play Function of the secondary locking device/latch play Actuation forces for the secondary locking device	after plugging the contact: $F_{\text{contact retention}}: 10\text{N}$ Open: $10\text{N} \leq F_O \leq 50\text{N}$ Close: $F_C < 75\text{N}$ Close not OK: min. $F_{C\text{ NOK}} > F_C + 50\text{N}$	DIN EN 60068-2-31
3.4.12.	Handling and functional reliability of the contact housings [TG7]*	Distinctiveness of the unequipped contact housings Keying-Efficiency: $F_{\text{COD}} \geq 80\text{ N}$ Polarization-Efficiency: $F_{\text{POL}} \geq 80\text{ N}$ Holding force of the contact housing latching/locking Retention Force: 2 - Pin $F_{\text{Hold}} > 60\text{ N}$ 3 - to 6 - Pin $F_{\text{Hold}} > 80\text{ N}$ Insertion Force: $F_{\text{In}} \leq 75\text{ N}$	DIN EN 60512-13-5 DIN EN 60512-15-6
3.4.13.	Insertion and holding forces of the contact parts in the contact housing [TG8]*	Contact insertion force: $F_{\text{In}} \leq 6,0\text{ N}$ Contact retention force, primary lock: $F_{\text{prim}} > 30\text{ N}$ Contact retention force, secondary lock: $F_{\text{sec}} > 30\text{ N}$	
3.4.14.	Pin insertion angle/misuse-proofing (scoop-proofing) [TG9]*	Scoop proof testing of contact housing: Skewed Insertion, that damages the contacts, is not possible. Koshiri-Protection is provided.	Theoretical proof (CAD)
3.4.15.	Contacts: conductor pull-out strength [TG10]*	Conductor pull-out strength: $F_{\text{pull}} \geq 50\text{ N}$	Only with crimp connection. AWG22 wires (ELECTROAIR KZ06) according to IEC60332-1
3.4.16.	Contacts: Insertion and removal forces, number of mating cycles [TG11]* Plugging and removal force	Mating force variation $\leq 25\%$ to first cycle permitted Number of mating cycle: Au: min. 100 cycles	Insertion and extraction force, without additional lubricants

3.4.17.	Dynamic loading [TG17]* Volume resistance: Dynamic load, broadband noise: Shock durability testing: Chapter 4.3 Volume resistance:	See chapter 4.3 $R_{initial} < 15 \text{ m}\Omega$ No current interruption ($> 1 \mu\text{s}$ / $> 7 \text{ Ohm}$) $R_{final} < 15 \text{ m}\Omega$	VW75174: severity level 2 /temperature profile 2 cable fastening referring VW80332 in distances of 100 mm and 250 mm DIN EN 60512-2-1 DIN EN 60068-2-64 DIN EN 60068-2-27 DIN EN 60512-2-1
3.4.18.	Mechanical and thermal relaxation behavior [TG5]*	Document the normal force	DIN EN 60068-2-2 /Test B Measured indirectly via retention force with gauge Aging in dry heat: 1 - 1000 h at 150 °C

ENVIRONMENTAL			
3.4.19.	Electrical stress test [TG15]* Volume resistance: Temperature/ current cycle endurance test: Damp heat, cyclic: Temperature/ current cycle endurance test: Volume resistance:	$R_{initial} < 15 \text{ m}\Omega$ $R_{final} < 15 \text{ m}\Omega$	The DUTs are inserted and extracted 2 times DIN EN 60512-2-1 DIN EN 60068-2-30 DIN EN 60512-2-1
3.4.20.	Environmental simulation [TG19]* Volume resistance: Temperature shock: Temperature change: Aging in dry heat: Industrial climate: Damp heat, cyclic: Dynamic load, broadband noise: Mechanical shock testing: Volume resistance:	$R_{initial} < 15 \text{ m}\Omega$ $R_{final} < 15 \text{ m}\Omega$	DIN EN 60512-2-1 DIN EN 60068-2-14, Test Na DIN EN 60068-2-14, Test Nb DIN EN 60068-2-2, Test Nb DIN EN 60512-11-7 DIN EN 60068-2-30, variant 2 DIN EN 60068-2-64 DIN EN 60068-2-27 DIN EN 60512-2-1
3.4.21.	Climatic load of the housing [TG20]* Insulation resistance: Aging in dry heat: Aging in damp heat, constant: Insulation resistance: Low-temperature aging: Extracting and inserting: Aging in dry heat: Drop test in the unplugged state:	$R_{isol} > 100 \text{ M}\Omega$ at $U = 500 \text{ V}$, $t = 60 \text{ s}$ $R_{isol} > 100 \text{ M}\Omega$ at $-20 \text{ }^{\circ}\text{C}$: passed	VW80332 additional to measure with 1000 Vdc DIN EN 60512-3-1 DIN EN 60068-2-2, Test B DIN EN 60068-2-30 DIN EN 60512-3-1 DIN EN 60068-2-1 DIN EN 60068-2-2, Test B DIN EN 60068-2-31

3.4.22.	Long-term temperature aging [TG21]* Volume resistance: Long-term aging in dry heat: Volume resistance: Drop test: Contact extraction force:	$R_{\text{initial}} < 15 \text{ m}\Omega$ $R_{\text{final}} < 15 \text{ m}\Omega$ $F_{\text{Hold}} \geq 55 \text{ N}$	DIN EN 60512-2-1 DIN EN 60068-2-2, Test B 1000 h at 150 °C DIN EN 60512-2-1 DIN EN 60068-2-31
3.4.23.	Resistance to chemicals [TG22]* Insulation resistance: Resistance to chemicals: Insulation resistance:	$R_{\text{isol}} > 100 \text{ M}\Omega$ at $U = 500 \text{ V}$, $t = 60 \text{ s}$ at $U = 1000 \text{ V}$, $t = 60 \text{ s}$ $R_{\text{isol}} > 100 \text{ M}\Omega$	VW80332 additional to measure with 1000 Vdc DIN EN 60512-3-1 according to VW 75174 (2018-10), used chemicals see Appendix 4.4 DIN EN 60512-3-1

3.5. Product Qualification and Requalification Test Sequence

Test groups and sequences are to be carried out in accordance with VW75174 and VW 80332.

More information can be found in 501-19324-.*.

4. APPENDIX

4.1. Influence of the contact housing on the derating [TG13]*

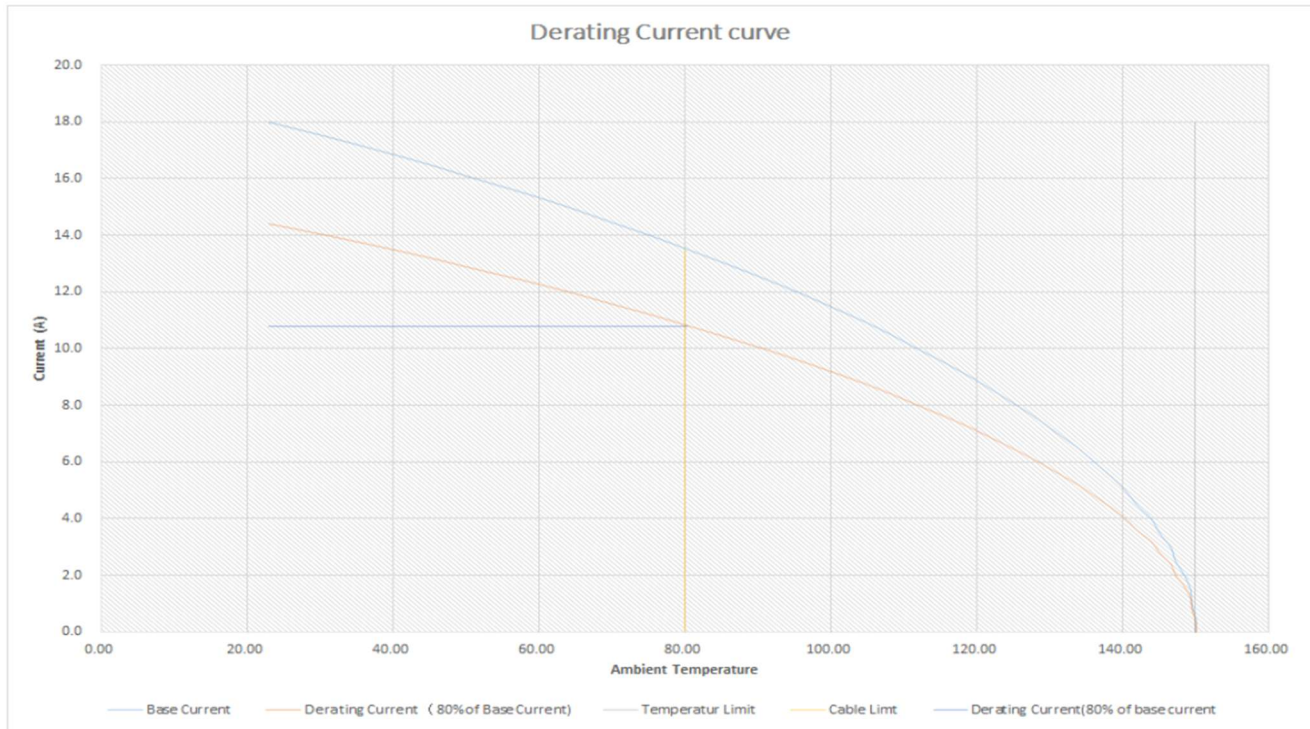


Figure 1: Derating curve 2-pin: 10.8A (angled/ straight)

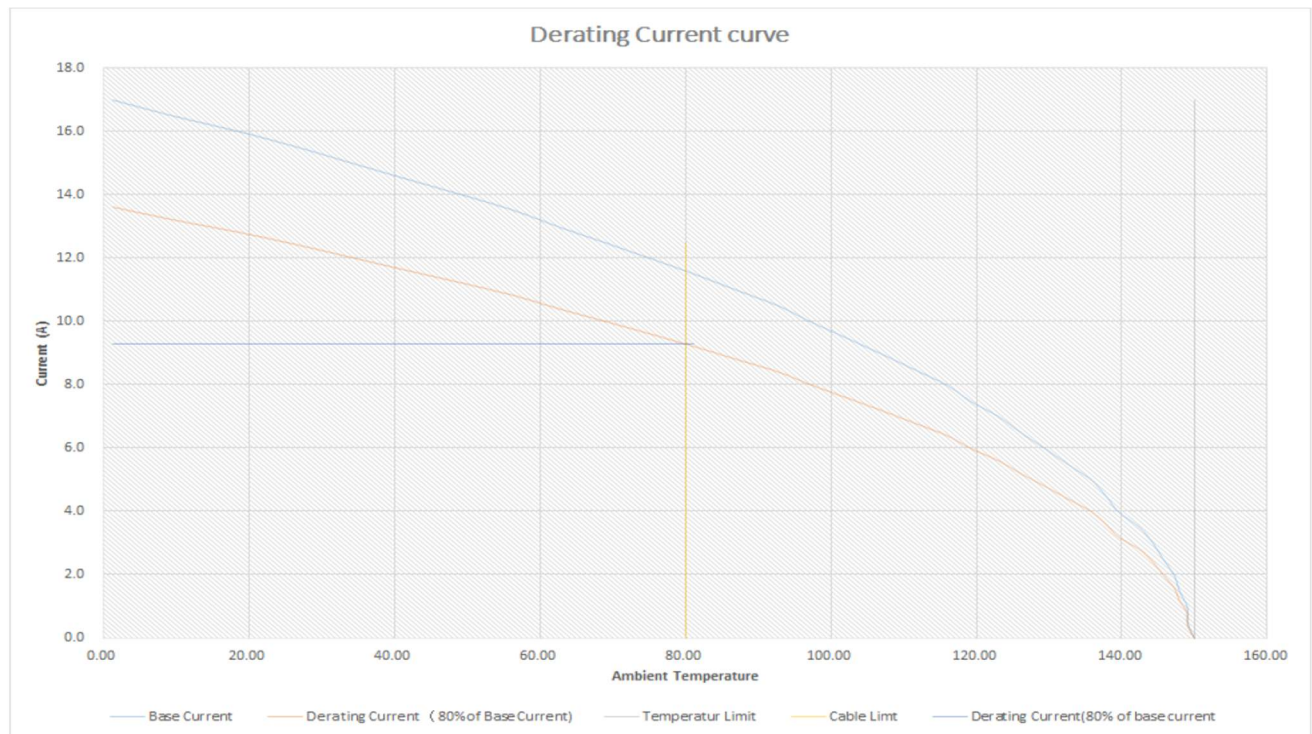


Figure 2: Derating curve 6-pin, 9.3A (angled/ straight)

4.2. Thermal time constant [TG14]*

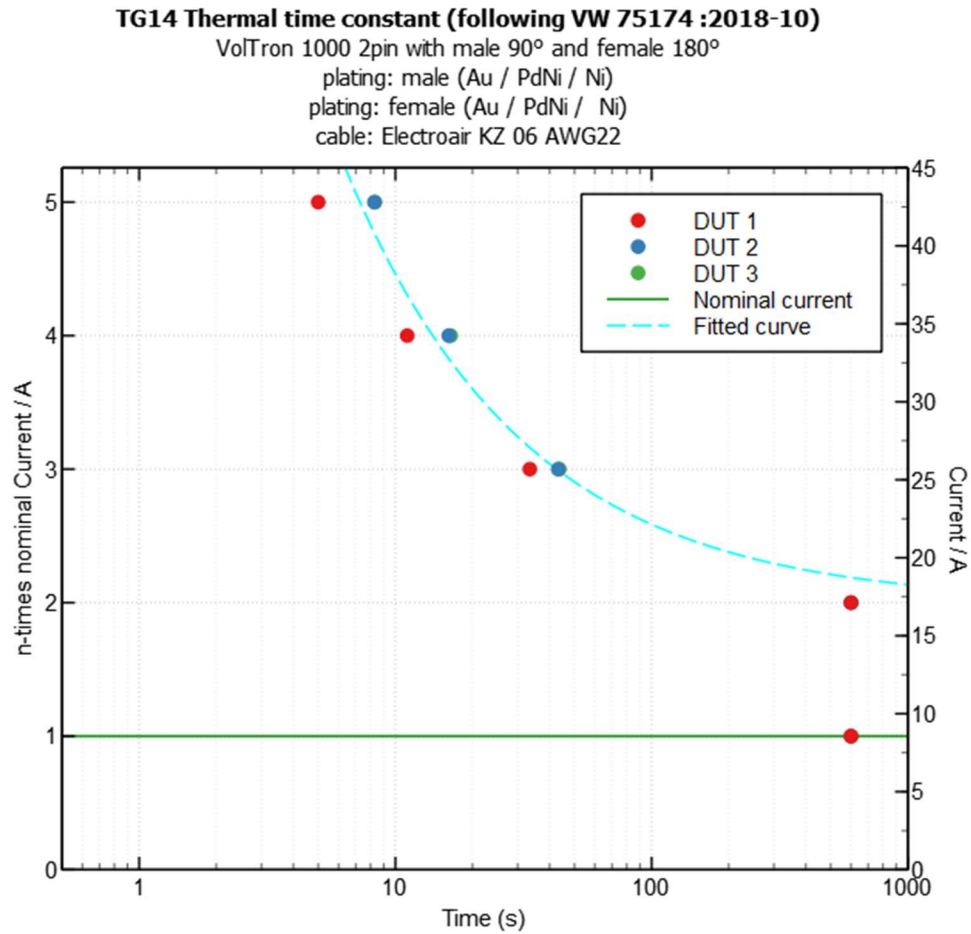


Figure 3: Thermal time constant: Current over time diagram

The values of DUT 2 and DUT 3 are very similar that's why these data points in Figure 3 are on top of each other.

4.3. Test setup [TG 17]*: VW75174

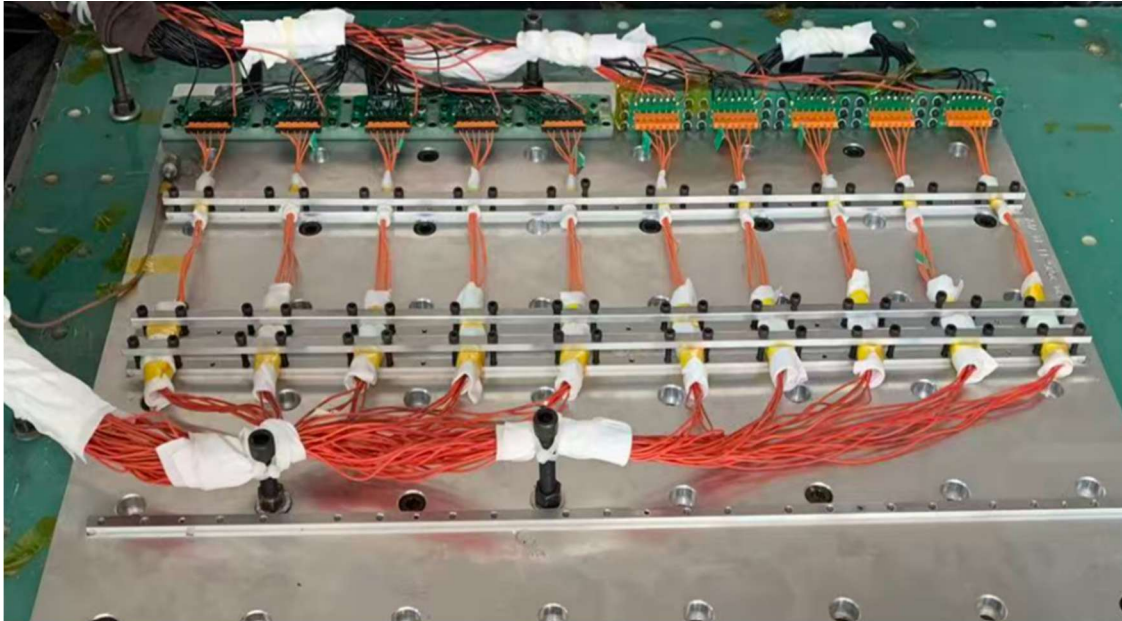


Figure 4: cable fastening distances of 100 mm and 250 mm

Severity	TC	Noise with TC		Vibration excitation, sinusoidal, with TC	Number of shocks
2. "Body" sealed	0 min/20 °C 60 min/-40 °C 150 min/-40 °C 300 min/120 °C 420 min/120 °C 480 min/20 °C	20 h per axis; RMS value of acceleration: 27.8 m/s ²		No sine wave	a ^{a)} = 30 g t ^{b)} = 6 ms sinusoidal half-wave No. of shocks: 6 000
		Hz ^{c)}	(m/s ²) ² /Hz ^{d)}		
		10	20		
		55	6.5		
		180	0.25		
		300	0.25		
		360	0.14		
		1000	0.14		

a) Acceleration
b) Cycle duration
c) Frequency
d) Power density spectrum

Table 1: Test profile TG17-VW75174

4.4. Overview of used chemicals [TG22]*

No.	Chemical agent	Used chemical agent
1	Cold-cleaning agent / cockpit cleaning agent	presto Motorkaltreiniger
2	Penetrating oil	WD 40 Aerosol, Spray Applicator
3	Undiluted washer fluid antifreeze	Klarblick -60 °C
4	Isopropanol	2-Propanol
5	Grease	Interflon Fin Food Grease EP

Table 1: used chemical agents

5. REVISION HISTORY TABLE

LTR	Revision record	Drafted	Approved	Date
A	Initial Release	Gerhard Luck	Oberschelp	21 June 2023
B	Update	Fisher ZHU	Liam. LING	24 DEC 2025