



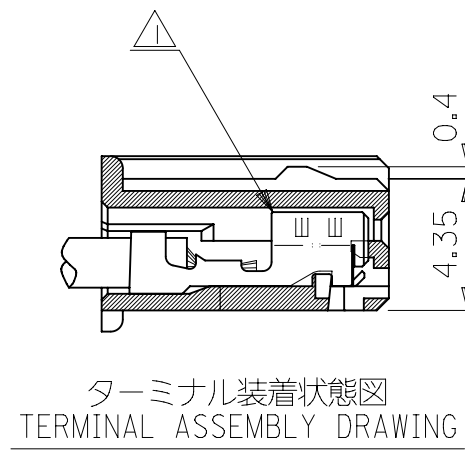


△ 適合ターミナル : 5035I-8*00
APPLICABLE TERMINAL : 5035I-8*00

2. 嵌合相手 : 53375,53376,53388,53389,53426
53535 シリーズ
MATE WITH : 53375,53376,53388,53389,53426
53535 SEIRES

△ ③ 偶数極の製品に適用。
APPLY EVEN CIRCUIT PRODUCTS.

△ ④ ロックの数 NUMBER OF LOCKS
5極以下 : 1個
LESS THAN 5 CIRCUIT PRODUCTS : 1 PIECE
6極以上 : 2個
MORE THAN 6 CIRCUIT PRODUCTS : 2 PIECES

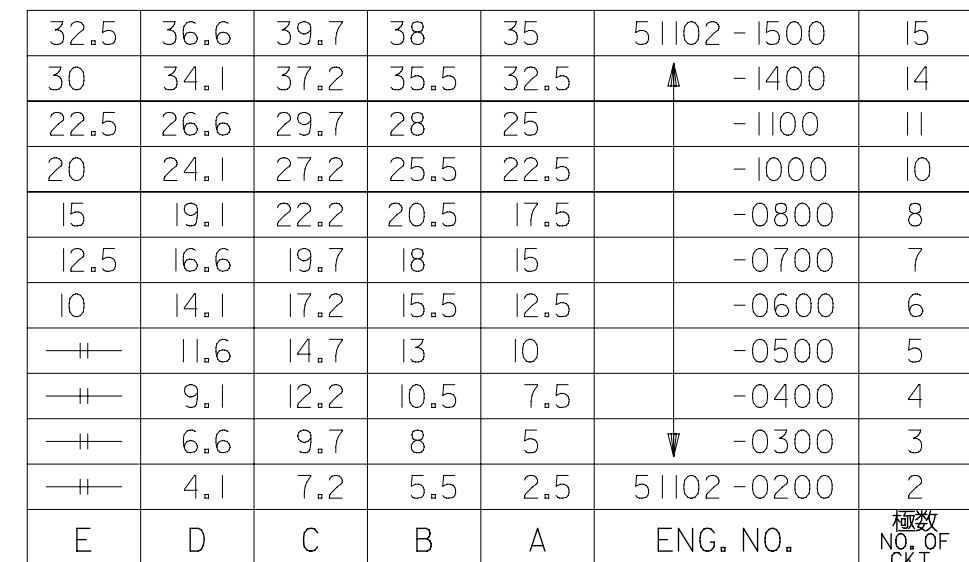

材料 MATERIAL	PBTP, UL94V-0 (白色 WHITE)
仕上げ FINISH	——H——
適用電線範囲 WIRE RANGE	——H——
被覆外径 INS. RANGE	——H——

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										CUT				
DIMENSION UNITS		SCALE		CURRENT REV DESC: OBSOLETE PART NO				molex						
mm		4:1												
GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 629832 DRWN: VLOKESHA 2019/12/18 CHK'D: GGA 2020/01/22 APPR: GGA 2020/01/22				2.5 W/B CONN HSG (FRICTION LOCK)						
	MM	INCH	PRODUCT CUSTOMER DRAWING											
4 PLACES	±	±						DOCUMENT NUMBER SD-51102-XX00						
3 PLACES	±	±										DOC TYPE PSD		
2 PLACES	±	±	DOC PART 001											
1 PLACE	±	±					REVISION C1							
0 PLACES	±	±												
ANGULAR TOL			°											
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER				
								A3-SIZE		51102		SEE CHART		
								CUSTOMER		SHEET NUMBER				
								GENERAL MARKET		1 OF 1				