

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	H1	ECR-25-231083	28MAR2025	SA	DSC


METRIC

DIMENSIONS LISTED IN mm [INCHES]

AMP WIRE RANGE	 E13288 Listed
12-10 AWG SOLID OR STRANDED	12-10 AWG STRANDED
 LR7189 Certified	MILITARY P/N AND CLASS
12-10 AWG SOLID OR STRANDED	NOT APPLICABLE


 STAMP AMP 12-10* APPROX AS SHOWN

OBSOLETE

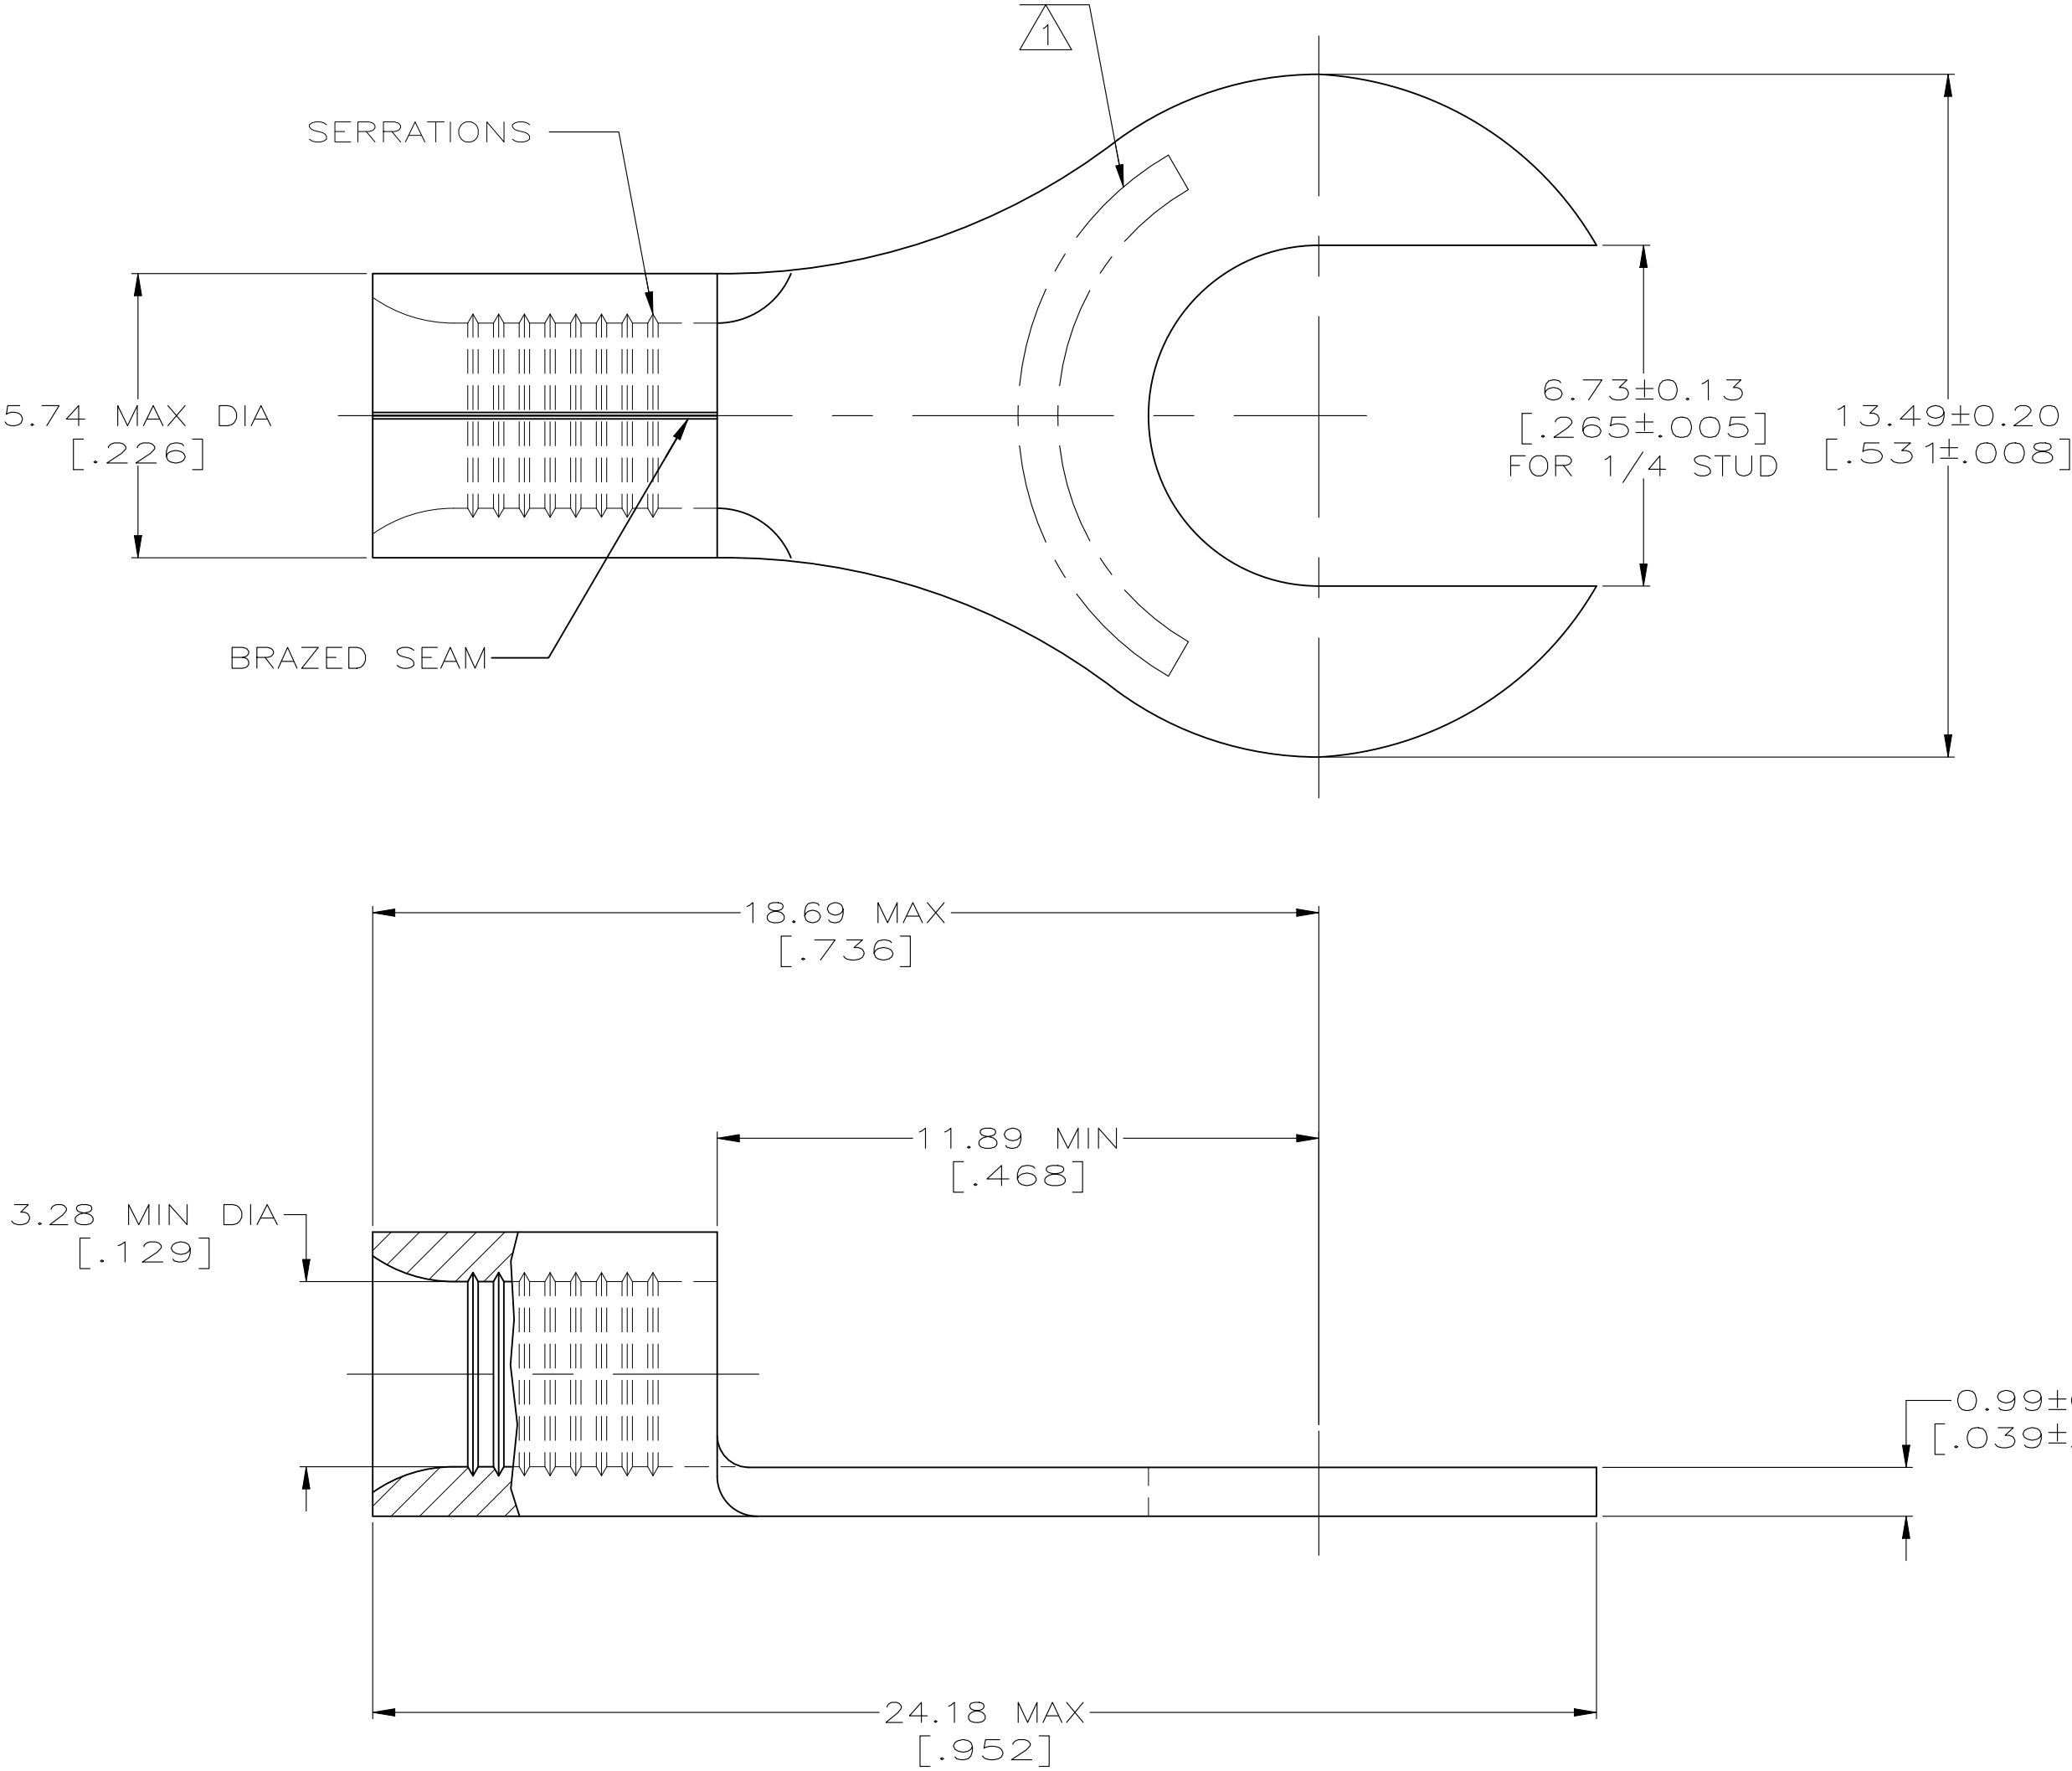

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: 170° C MAX
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: NOT APPLICABLE
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	WIRE CROSS SECTIONAL AREA RANGE: 2.62-6.64mm²[5,180-13,100] CIR MILS SOLID OR STRANDED
FOR ORDER ENTRY	1-800-526-5142	THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

25	LOOSE PIECE, BAG	8-35680-5
----	LOOSE PIECE	35680
QUANTITY	PACKAGE TYPE	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN TA BRINKMAN 4-8-93	 TE Connectivity		
DIMENSIONS: INCHES		CHK DA PATTERSON 4-8-93			
		APVD DE MILLER 4-8-93	NAME TERMINAL, SLOTTED RING TONGUE, SOLISTRAND™		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC —	SIZE A2		
MATERIAL COPPER PER ASTM B-2152 ANNEALED		FINISH TIN PLATE 0.00254[.000100] MIN THK PER MIL-T-10727	APPLICATION SPEC —		
		WEIGHT —	CAGE CODE 00779		
		CUSTOMER DRAWING		DRAWING NO C-35680	RESTRICTED TO —
		SCALE 8:1	SHEET 1 OF 1	REV H1	