


1 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

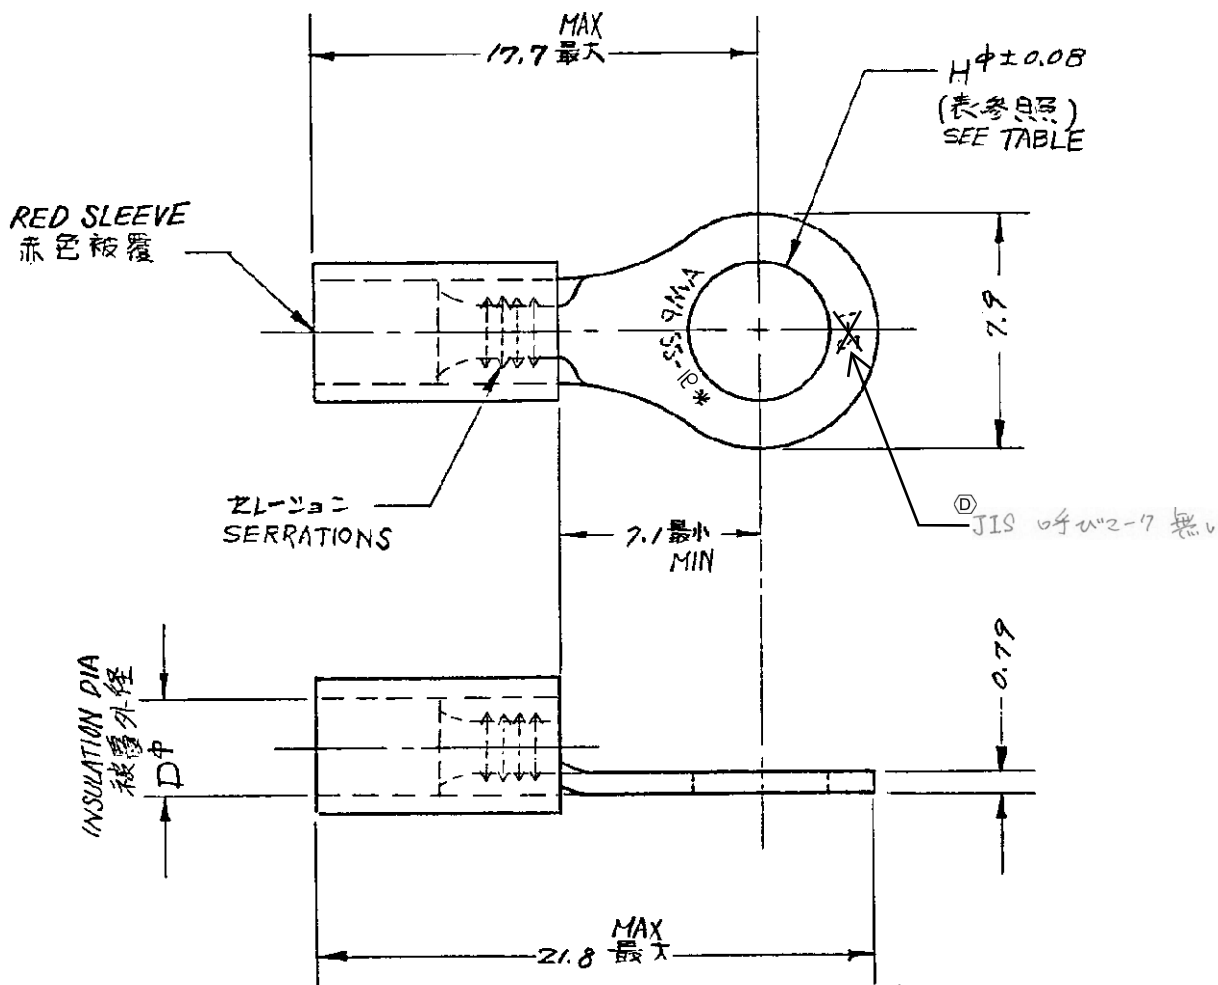

P/N	STUD	INSULATION DIA	P/N	STUD	INSULATION DIA
型番	スタッド	H中 被覆外径 D中	型番	スタッド	H中 被覆外径 D中
171509-1	#6	3.68 2.03 ~ 3.05	171509-6	#10	5 2.66 ~ 3.56
171509-2	#8	4.34 2.03 ~ 3.05	171509-7	5mm	5.2 2.03 ~ 3.05
171509-3	#10	5 2.03 ~ 3.05	171509-8	5mm	5.26 2.66 ~ 3.56
171509-4	#6	3.68 2.66 ~ 3.56	171509-9	SPEC.	5.79 2.03 ~ 3.05
171509-5	#8	4.34 2.66 ~ 3.56			

F1 REVISED PER ECR-25-253648 SA MDP 13AUG 2025				F1 REVISED PER ECR-17-007066 T.G N.Y 26MAY17				E OBSOLETE Y.O N.Y 14APR17			
LTR. 変更 (REVISION RECORD)				DR. CHK. DATE							
DR. 2/2/75				CHK. 2/2/75							
APP. 2/2/75				2/2/75							
MATERIAL: COPPER 銅				FINISH: ANNEAL TIN PL 焼付金 鉛めっき				WIRE RANGE: 22-16			
TOLERANCE: ±0.4				EXCEPT: (AS NOTED)				SCALE: 4:1			
LOC: J				SIZE: A				REV: F1			
NAME: 丸型端子				WIRE TERMINAL ASSEMBLY							