


4

3

2

1

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	H	REVISED PER ECR-24-207629	16MAY2024	SA	DSC

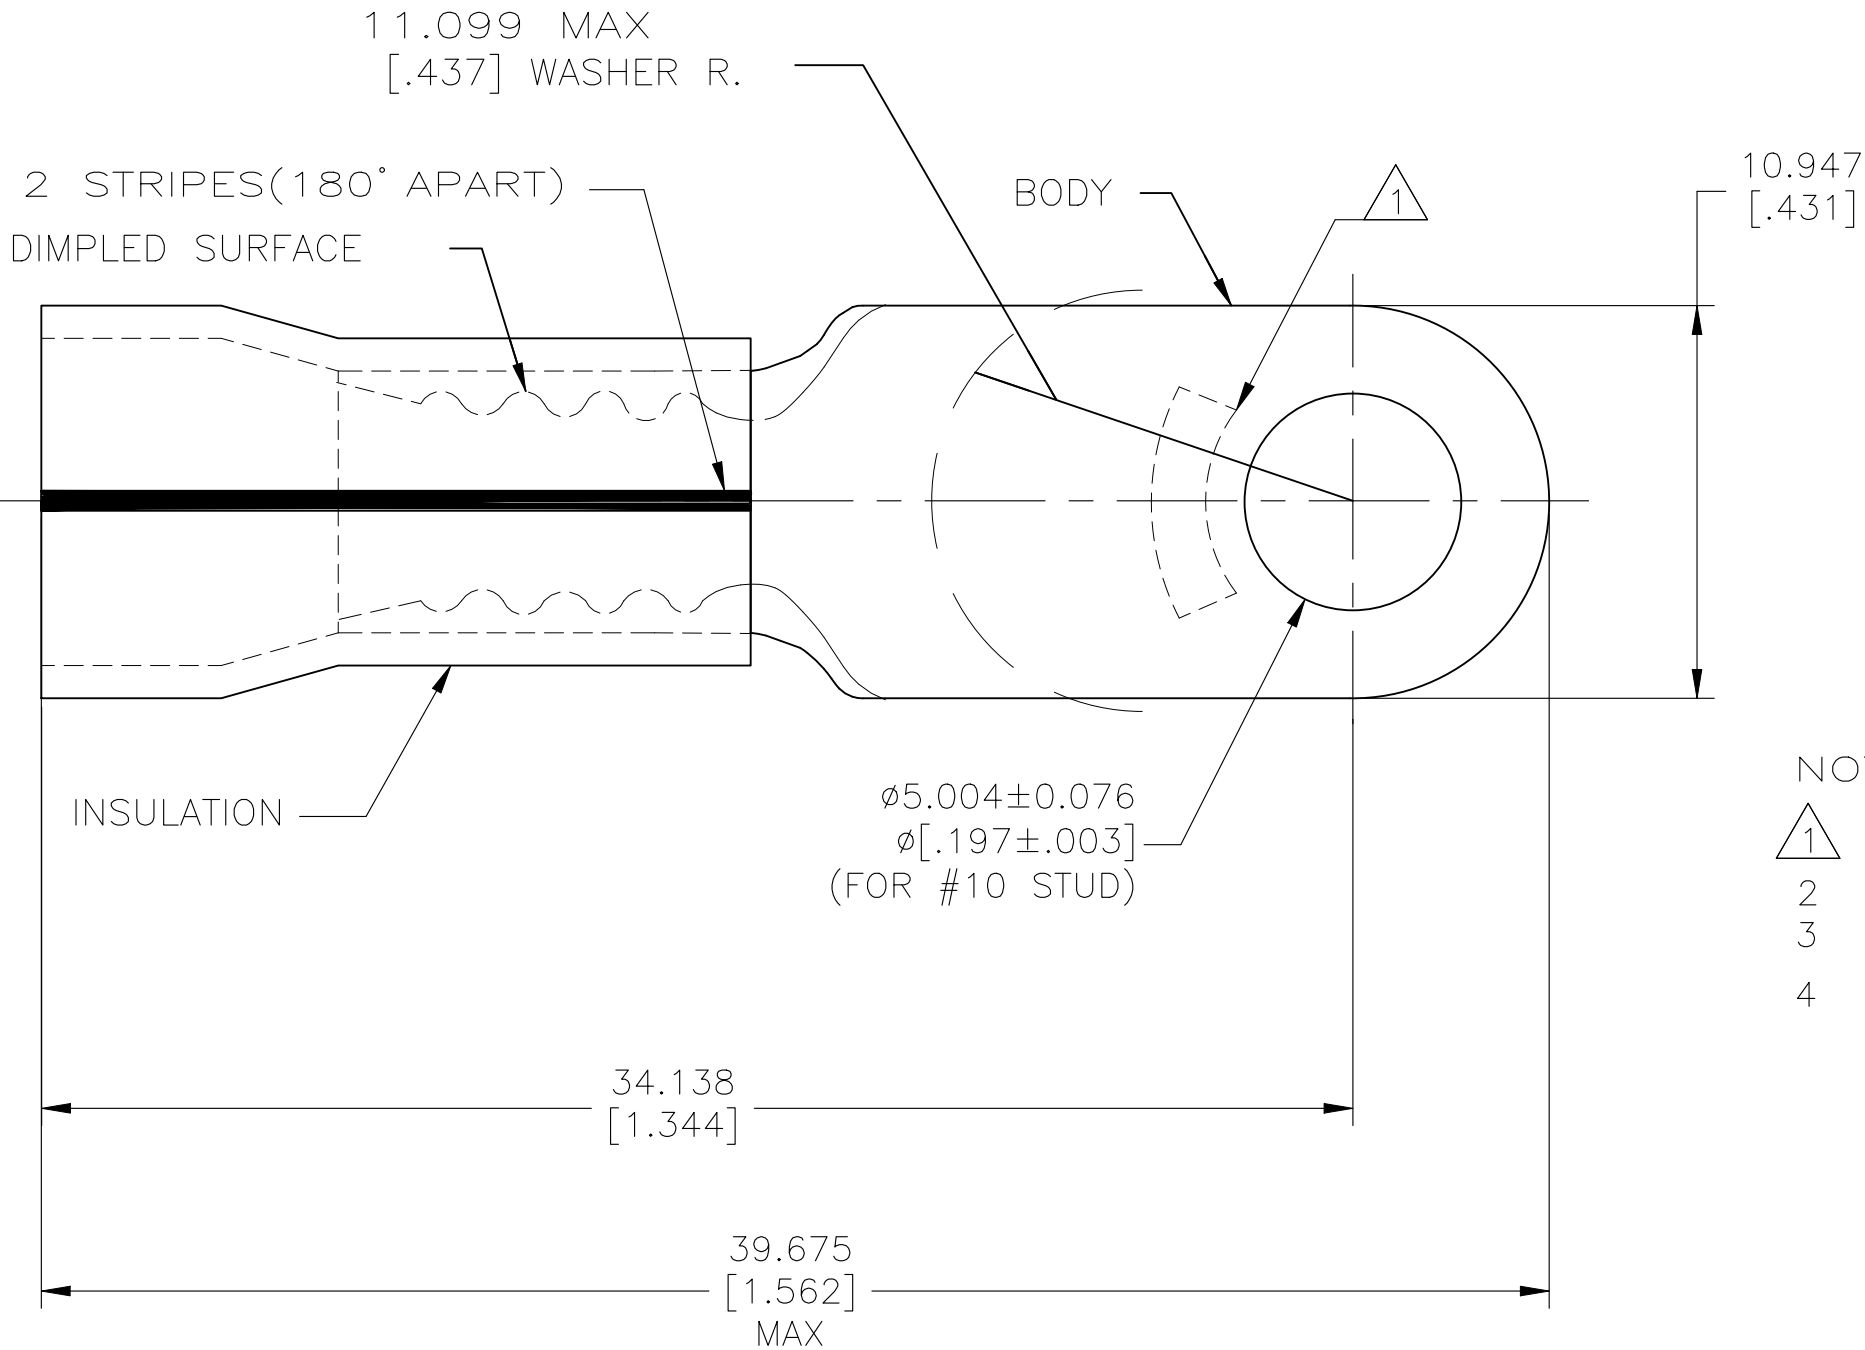

AMP
WIRE RANGE

8 AWG
STRANDED

- NOTE:
- 1 STAMP AMP 8* LOCATE APPROX AS SHOWN
 - 2 BODY MATERIAL THK 0.991±0.051[.039±.002]
 - 3 WIRE INSULATION: Ø9.652[Ø.380] MAX
 - 4 NOTE DELETED

100	LOOSE PC	53978-1
QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS			THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN S.S. GOULDEN 10-7-93		 TE Connectivity						
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	MAX RECOMMENDED OPERATING TEMPERATURE: 150°C [302°F] MAX	DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.127[.005] 4 PLC ± - ANGLES ± -	CHK R. HERSEY 10-7-93		NAME TERMINAL, RING TONGUE, PVF, PLASTI-GRIP, WIRE SIZE:8 AWG -						
		VOLTAGE RATING: NOT APPLICABLE	APVD B. BARE 10-7-93											
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	WIRE CROSS SECTIONAL AREA RANGE, 6.64-10.54mm ² [13,100-20,800] STRANDED	MATERIAL BODY: COPPER PER ASTM B-152 INSULATION: PVF ²			FINISH BODY:TIN/LEAD (93-7) PLATE PER ASTM B545 INSULATION COLOR: NATURAL W/RED STRIPES	PRODUCT SPEC NOT AVAILABLE		APPLICATION SPEC NOT AVAILABLE		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
FOR ORDER ENTRY	1-800-526-5142					WEIGHT -		A3		00779	C=53978		-	
CUSTOMER DRAWING								SCALE		NTS		SHEET 1 OF 1		REV H